VICINITY MAP

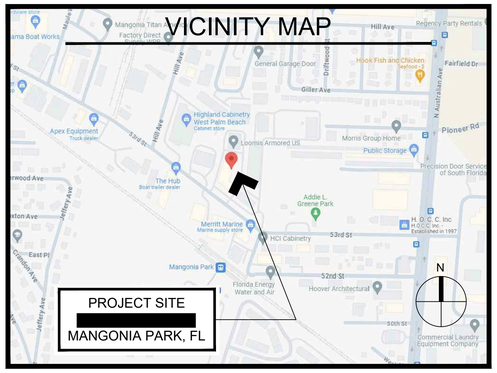

TABULAR DATA

ADDRESS:	[redacted]
SUBDIVISION:	FIFTY-THIRD STREET WAREHOUSES
LEGAL DESCRIPTION:	FIFTY-THIRD STREET WAREHOUSES PARCEL 3, [redacted]
PARCEL CONTROL:	44-43-43-05-25-003-0000
PROPERTY USE:	4000—VACANT INDUSTRIAL
ZONING USE:	I - INDUSTRIAL DISTRICT (44 - MANGONIA PARK)
LOT SIZE :	1.1985 ACRES
FLOOD ZONE :	ZONE 'X' - PANEL 12099C 0389F

SCOPE OF WORK

THE SCOPE OF WORK FOR THIS PROJECT CONSISTS EXCLUSIVELY OF THE STRUCTURAL FOUNDATION DESIGN FOR A PRE-ENGINEERED, PREFABRICATED 85' x 190' METAL BUILDING TO BE CONSTRUCTED ON A VACANT LOT. REFER TO DRAWINGS BY "MBMI STEEL BUILDINGS" 4723 W. ATLANTIC AVE., SUITE A20, DELRAY BEACH FOR ANY/ALL INFORMATION IN REGARDS TO THE METAL BUILDING. PROJ. #A6524ZG2.

TYPICAL NOTES

1. CONTRACTOR IS RESPONSIBLE FOR MEANS AND METHODS OF CONSTRUCTION AND TO ENSURE PROPER SAFETY PRECAUTIONS ARE APPLIED UNTIL PROPOSED STRUCTURAL WORK OUTLINED IN THIS DRAWING SET IS COMPLETED.
2. ALL MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE 2023 FLORIDA BUILDING CODE (8TH EDITION).
3. ANY CHANGES TO THE FOUNDATION DESIGN CONTAINED HEREIN THESE DRAWINGS SHALL HAVE BEEN REVIEWED AND APPROVED IN WRITING BY THE STRUCTURAL ENGINEER PRIOR TO COMMENCING WORK ON ITEMS AFFECTED.
4. CONTACT ENGINEER WITH ANY QUESTIONS OR DISCREPANCIES FOUND ON DRAWINGS, IF ANY
5. CONTRACTOR TO VISIT SITE AND SHALL VERIFY ALL EXISTING DIMENSIONS, CLEARANCES, ELEVATIONS, SUBSTRATES AND CONDITIONS PRIOR TO BEGINNING CONSTRUCTION.
6. THE WORK DEFINED WITHIN THIS DRAWING SET IS INTENDED TO ADDRESS THE STRUCTURAL FOUNDATION DESIGN FOR A PRE-ENGINEERED, PREFABRICATED 85' x 190' METAL BUILDING BY "MBMI STEEL BUILDINGS" PROJECT # A6524ZG2.
7. PROVIDE NEOPRENE PADS OR 90# FELT PAPER BETWEEN BOTTOM OF ALL STEEL BASE PLATES AND CONCRETE. TYP.

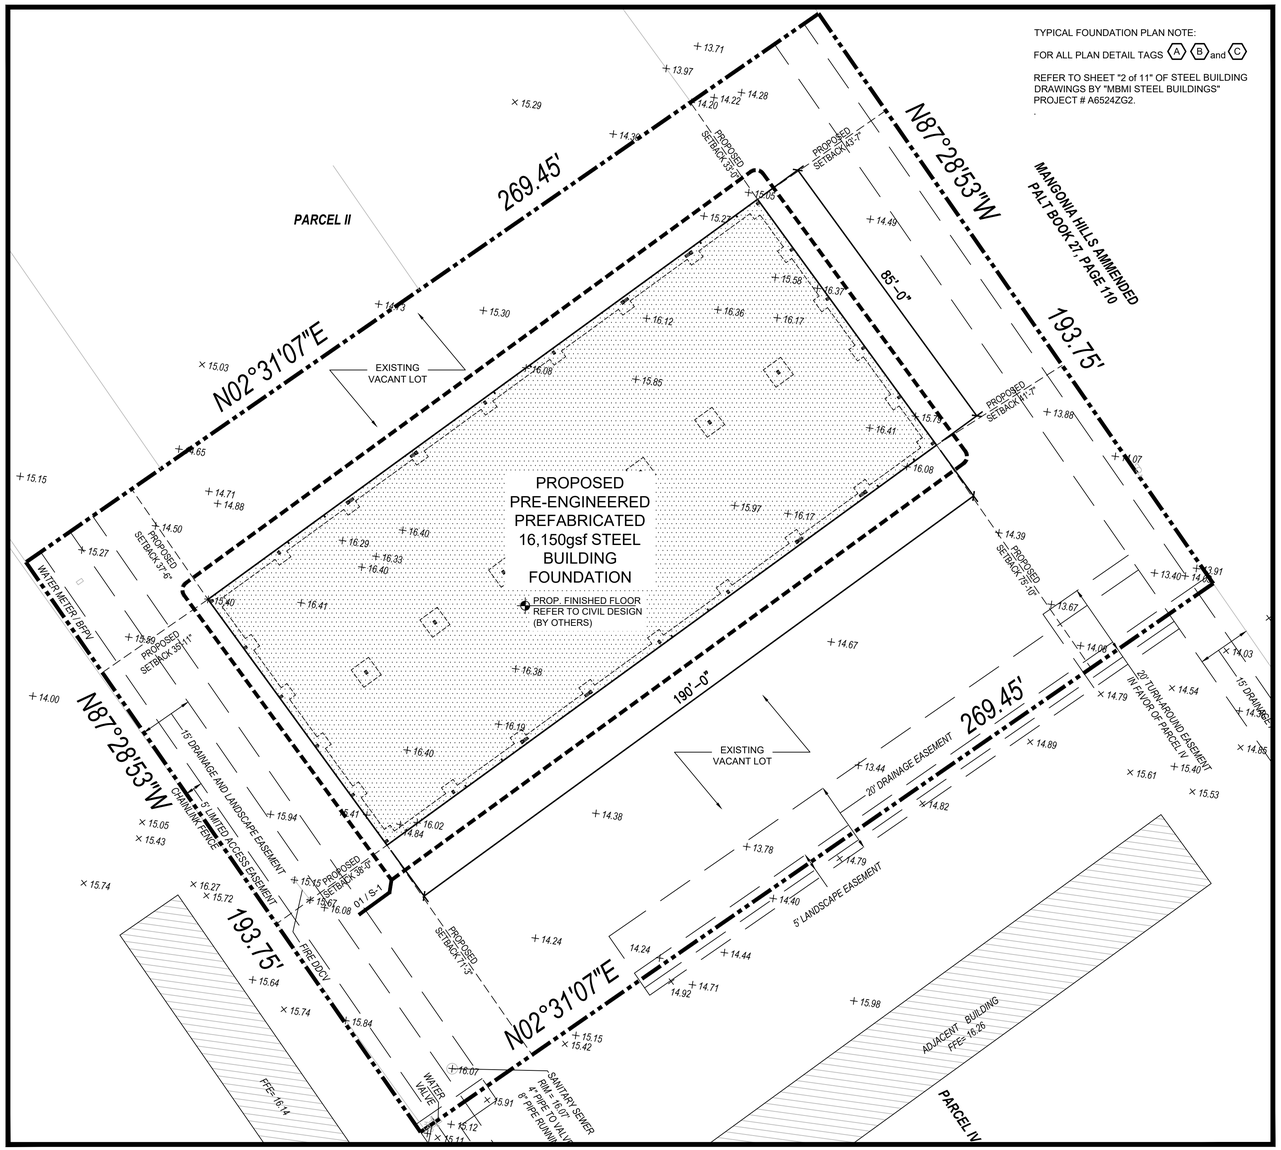

TYPICAL FOUNDATION PLAN NOTE:

FOR ALL PLAN DETAIL TAGS (A) (B) and (C)

REFER TO SHEET "2 of 11" OF STEEL BUILDING DRAWINGS BY "MBMI STEEL BUILDINGS" PROJECT # A6524ZG2.

PROPOSED FOUNDATION SITE PLAN

SCALE: 1" = 20'-0"

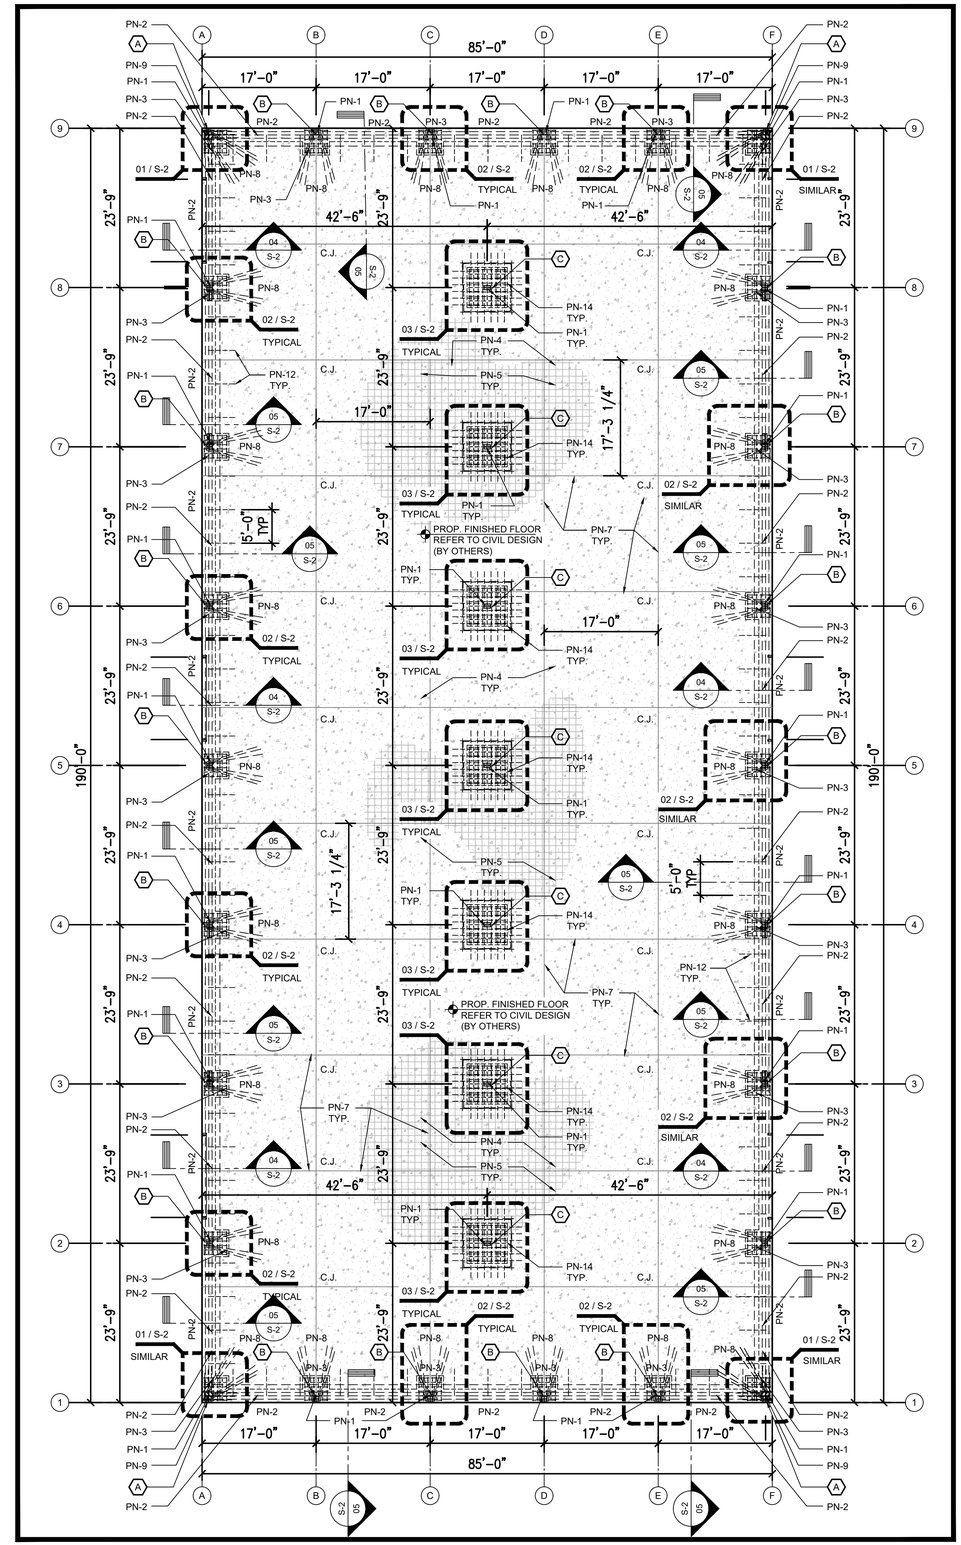

01 PROPOSED FOUNDATION PLAN

SCALE: 3/32" = 1'-0"

DKK CONSULTING INCORPORATED
CIVIL ENGINEERING • AGENT REPRESENTATION • INFRASTRUCTURE • RESOURCE MANAGEMENT
PH: 561-612-7312 • FX: 561-557-6834

ENGINEER OF RECORD:
DEREK SCHENAVAR
PE #: 63858

NOT VALID FOR CONSTRUCTION UNLESS SIGNED AND SEALED IN THIS BOX

#	DATE	DESCRIPTION

REVISIONS

1319 MANGONIA, L.L.C.
MANGONIA PARK WAREHOUSE
FOUNDATION DESIGN : PROPOSED STEEL BUILDING

DATE:	07–10–2024
SCALE:	AS NOTED
DRAWN BY:	FS
CHECKED BY:	DHS
PROJECT #:	24–01011.1

S-1

Sheet 1 of 2

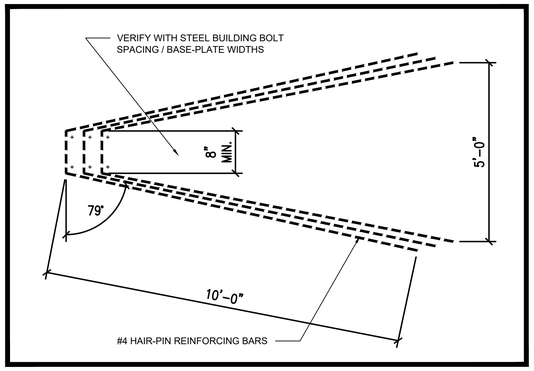

TYPICAL HAIRPIN REINFORCING DETAIL

SCALE: 1/2" = 1'-0"

PROPOSED KEYNOTES

PN-1	STRUCTURAL STEEL FRAME, COLUMNS, BASE PLATES, SIDING, ROOFING, ETC., BY "MBMI STEEL BUILDINGS". REFER TO STEEL BUILDING DRAWINGS BY "MBMI STEEL BUILDINGS" FOR INFORMATION SPECIFIC TO THE STEEL STRUCTURE / BUILDING, PROJECT # A6524ZG2.
PN-2	18" x 18" THICKENED EDGE (4,000psi) CONCRETE FOUNDATION / GRADE BEAM W/ (5) #5 CONTINUOUS REINFORCING BARS : (2) #5 BARS @ TOP; (3) #5 BARS @ BOTTOM & #4 STIRRUPS 24"C.C.
PN-3	48" x 48" x 18" (4,000psi) CONCRETE FOUNDATION W/ #5 REINFORCING U-BARS 8" O.C. EACH WAY. TYPICAL FOUNDATION FOR EXTERIOR / PERIMETER STEEL BUILDING COLUMNS.
PN-4	6" THICK (4,000psi) CONCRETE SLAB W/ 6x6 W1.4/W1.4 WWF OVER 6 MIL. VAPOR BARRIER OVER TERMITE TREATED WELL-COMPACTED FILL.
PN-5	GRADE AT ALL AREAS OF PROPOSED FOUNDATIONS AND 5' BEYOND TO BE COMPACTED IN ACCORDANCE WITH OWNER PROVIDED GEO-TECHNICAL SOILS REPORT.
PN-6	1 1/2" SLAB RECESS / WATER-STOP (COORDINATE W/ FINAL DOOR LOCATIONS)
PN-7	(C.J) SAW-CUT FLOOR SLAB CONTROL JOINTS, TYPICAL. MAXIMUM SPACING 18'-0" C.C.
PN-8	(3) #4 HAIR-PIN REINFORCING BARS AT EACH STEEL BUILDING COLUMN.
PN-9	EMBEDDED THREADED J-BOLTS, TYPICAL AT EACH COLUMN LOCATION. LOCATE J-BOLTS PER DETAILS PROVIDED WITHIN DRAWINGS BY "MBMI STEEL BUILDINGS", PROJECT # A6524ZG2. J-BOLT DIAMETERS AND QUANTITIES PER "MBMI STEEL BUILDINGS" DRAWINGS.
PN-10	#5 CONTINUOUS REINFORCING BAR, TYPICAL.
PN-11	#4 STIRRUPS 24" O.C. MAX SPACING
PN-12	#5 PERIMETER L-BARS, 5'-0" C.C. MINIMUM
PN-13	8" x 12" x 1/4" THICK STEEL PLATES (EMBEDDED) ANCHORED TO J-BOLTS W/ NUTS
PN-14	72" x 72" x 24" (4,000psi) CONCRETE FOUNDATION W/ #5 REINFORCING U-BARS 8" O.C. EACH WAY. TYPICAL FOUNDATION FOR ALL INTERIOR / CENTERED STEEL BUILDING COLUMNS.
PN-15	#5 L-BARS @ CENTER COLUMN FOUNDATIONS, 12" C.C. MINIMUM

BUILDING CODE SUMMARY

APPLICABLE BUILDING CODE:	2023 FLORIDA BUILDING CODE, 8TH EDITION, F.B.C. - BUILDING
CONSTRUCTION TYPE:	IIB, UNPROTECTED, FULLY SPRINKLERED
CLASSIFICATION OF WORK:	STRUCTURAL DESIGN : CHAPTER 16
OCCUPANCY CLASSIFICATION:	MODERATE HAZARD FACTORY / INDUSTRIAL (GROUP F-1)
BUILDING AREA & HEIGHT CALCULATION:	ALLOWABLE AREA = 62,000gsf PROPOSED AREA = 16,150gsf ALLOWABLE HEIGHT = 3 STORIES (75 FEET) PROPOSED HEIGHT = 1 STORY (+/- 22'-0")
FIRE RESISTIVE RATING REQMNTS FOR BUILDING ELEMENTS :	PRIMARY STRUCTURAL FRAME = 0 HOUR BEARING WALLS (EXTERIOR) = 0 HOUR
BEARING WALLS (INTERIOR) = 0 HOUR	NON-BEARING INTERIOR WALLS = 0 HOUR FLOOR CONSTRUCTION = 0 HOUR ROOF CONSTRUCTION = 0 HOUR
WIND DESIGN CRITERIA:	BASIC WIND SPEED = 170 MPH (3 SECOND GUST) IMPORTANCE FACTOR = 1.0 EXPOSURE = C RISK CATEGORY: II PROPOSED STRUCTURE DESIGNED AS "ENCLOSED"

CONSTRUCTION SPECIFICATIONS

SITE WORK:

1. BASE MATERIAL AND SITE WORK TO BE PREPARED IN ACCORDANCE WITH OWNER PROVIDED GEO-TECHNICAL REPORT. MINIMUM BEARING CAPACITY TO BE 2500psf.
2. ALL AREAS SCHEDULED TO RECEIVE CONCRETE SLAB PLACEMENT SHALL BE COMPACTED IN ACCORDANCE WITH OWNER PROVIDED SOILS REPORT AND IN COMPLIANCE WITH 95% AASHTO T-180

CAST IN PLACE CONCRETE:

1. APPLICABLE STANDARDS:

ACI NUMBER	TITLE
117	STANDARD SPECIFICATIONS FOR TOLERANCES FOR CONCRETE CONSTRUCTION
304	GUIDE FOR MEASURING, MIXING, TRANSPORTING, AND PLACING CONCRETE
304.2R	PLACING CONCRETE BY PUMPING METHODS
305R	HOT WEATHER CONCRETING
308	STANDARD PRACTICE FOR CURING CONCRETE
318	BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE
347	RECOMMENDED PRACTICE FOR CONCRETE FORM-WORK

1. LAP SPLICE ALL BARS 48 DIAMETERS MINIMUM UNLESS OTHERWISE SHOWN OR NOTED.
2. ALL REINFORCEMENT SHALL BE FASTENED AND SECURED TOGETHER TO PREVENT DISPLACEMENT BY CONSTRUCTION LOADS OR THE PLACING OF CONCRETE.
3. ALL PROPOSED CONCRETE TO BE 4,000psi UNLESS OTHERWISE SPECIFIED.
4. PROPOSED CONCRETE SLAB TO BE INSTALLED WITH 6 MIL. VAPOR BARRIER BETWEEN CONCRETE AND EXPOSED GRADE, TYPICAL.

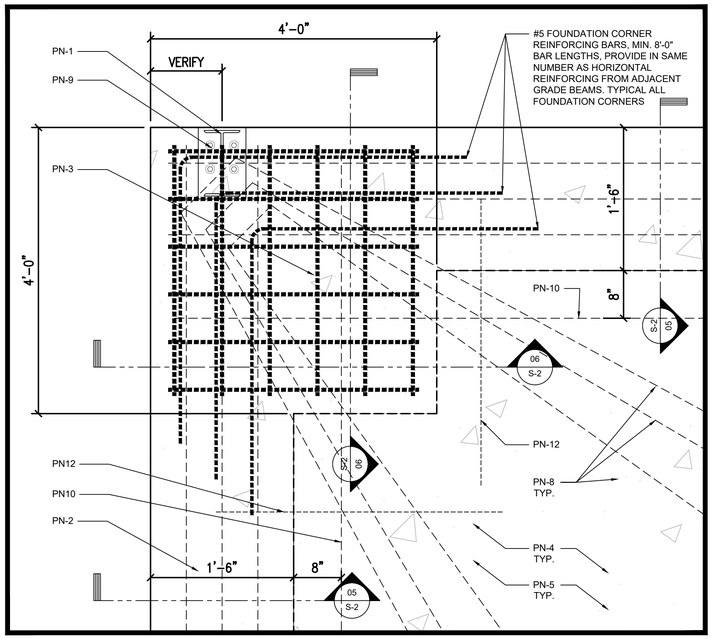

01 TYPICAL CORNER FOUNDATION DETAIL

SCALE: 1" = 1'-0"

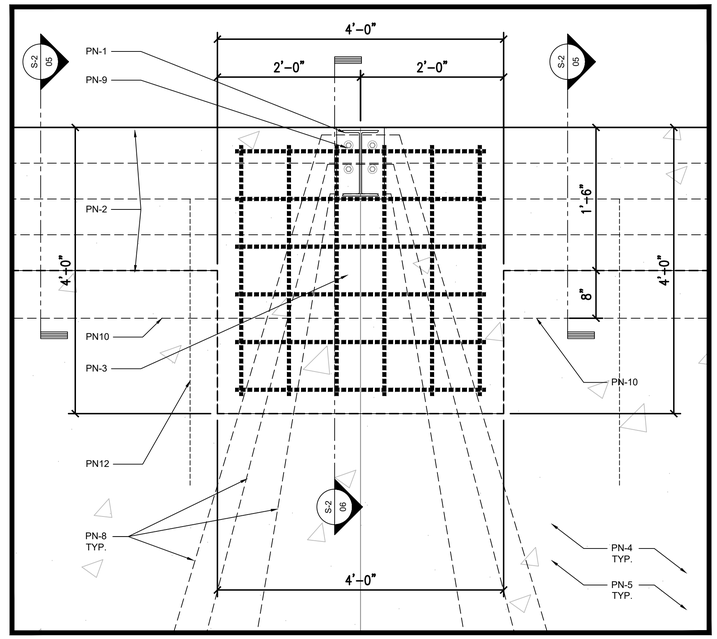

02 TYPICAL EXTERIOR EDGE FOUNDATION PLAN DETAIL

SCALE: 1" = 1'-0"

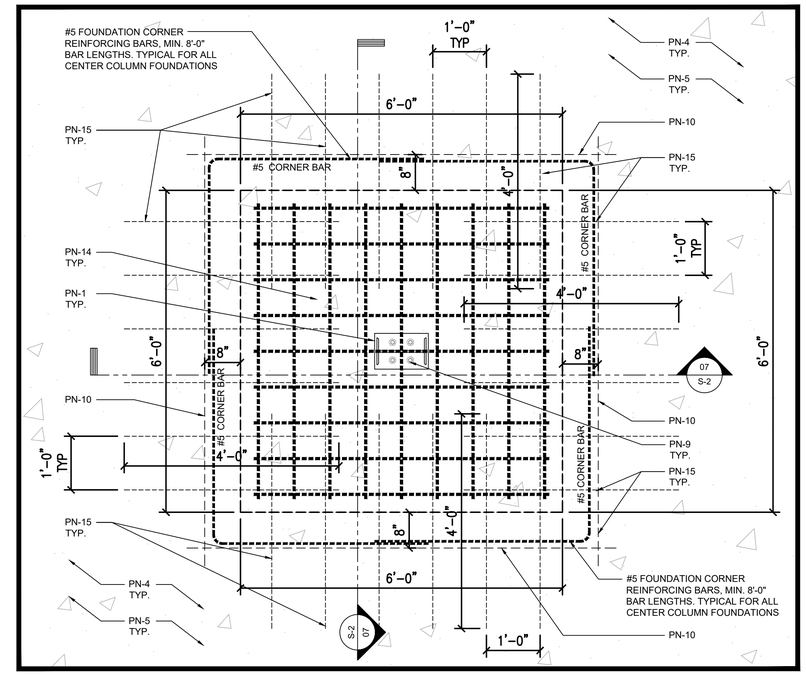

03 TYPICAL INTERIOR/CENTERED FOUNDATION PLAN DETAIL

SCALE: 3/4" = 1'-0"

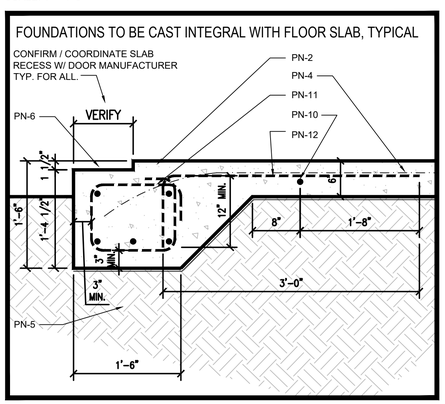

04 TYP. THICKENED EDGE / GRADE BEAM

SCALE: 1" = 1'-0"

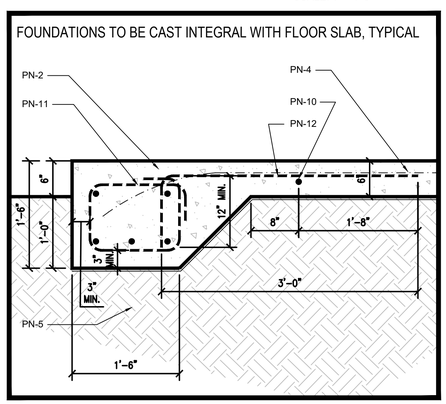

05 TYP.THICKENED EDGE / GRADE BEAM

SCALE: 1" = 1'-0"

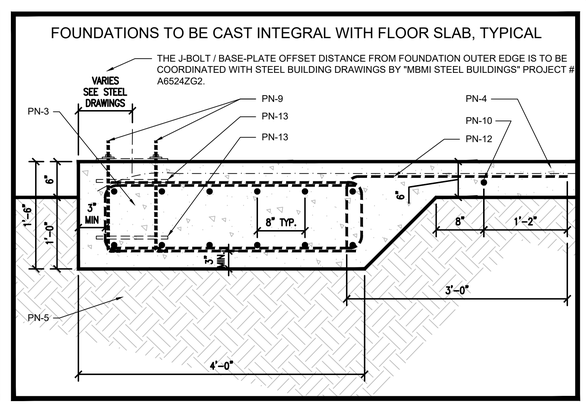

06 TYPICAL EXTERIOR COLUMN FOUNDATION

SCALE: 1" = 1'-0"

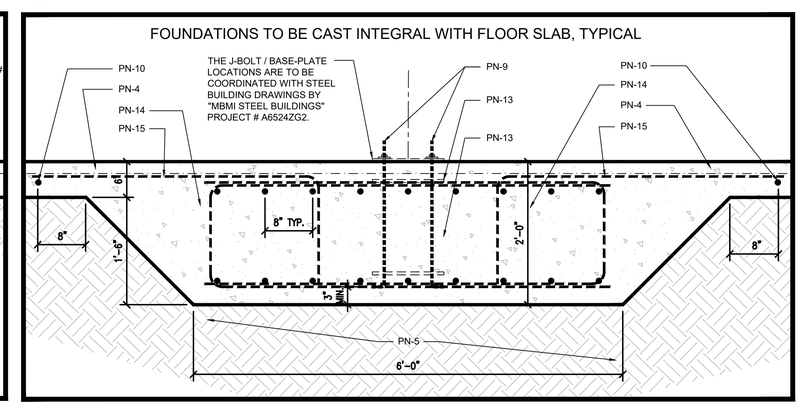

07 TYPICAL INTERIOR / CENTERED COLUMN FOUNDATION

SCALE: 1" = 1'-0"

DKK CONSULTING INCORPORATED
CIVIL ENGINEERING • AGENT REPRESENTATION • INFRASTRUCTURE • RESOURCE MANAGEMENT
PH: 561-612-7312 • FX: 561-557-6834

ENGINEER OF RECORD:
DEREK SCHENAVAR
PE #: 63858

NOT VALID FOR CONSTRUCTION UNLESS SIGNED AND SEALED IN THIS BOX

#	DATE	DESCRIPTION

REVISIONS

1319 MANGONIA, L.L.C.
MANGONIA PARK WAREHOUSE
FOUNDATION DESIGN : PROPOSED STEEL BUILDING

DATE:	07-10-2024
SCALE:	AS NOTED
DRAWN BY:	FS
CHECKED BY:	DHS
PROJECT #:	24-01011.1

S-2

Sheet 2 of 2