


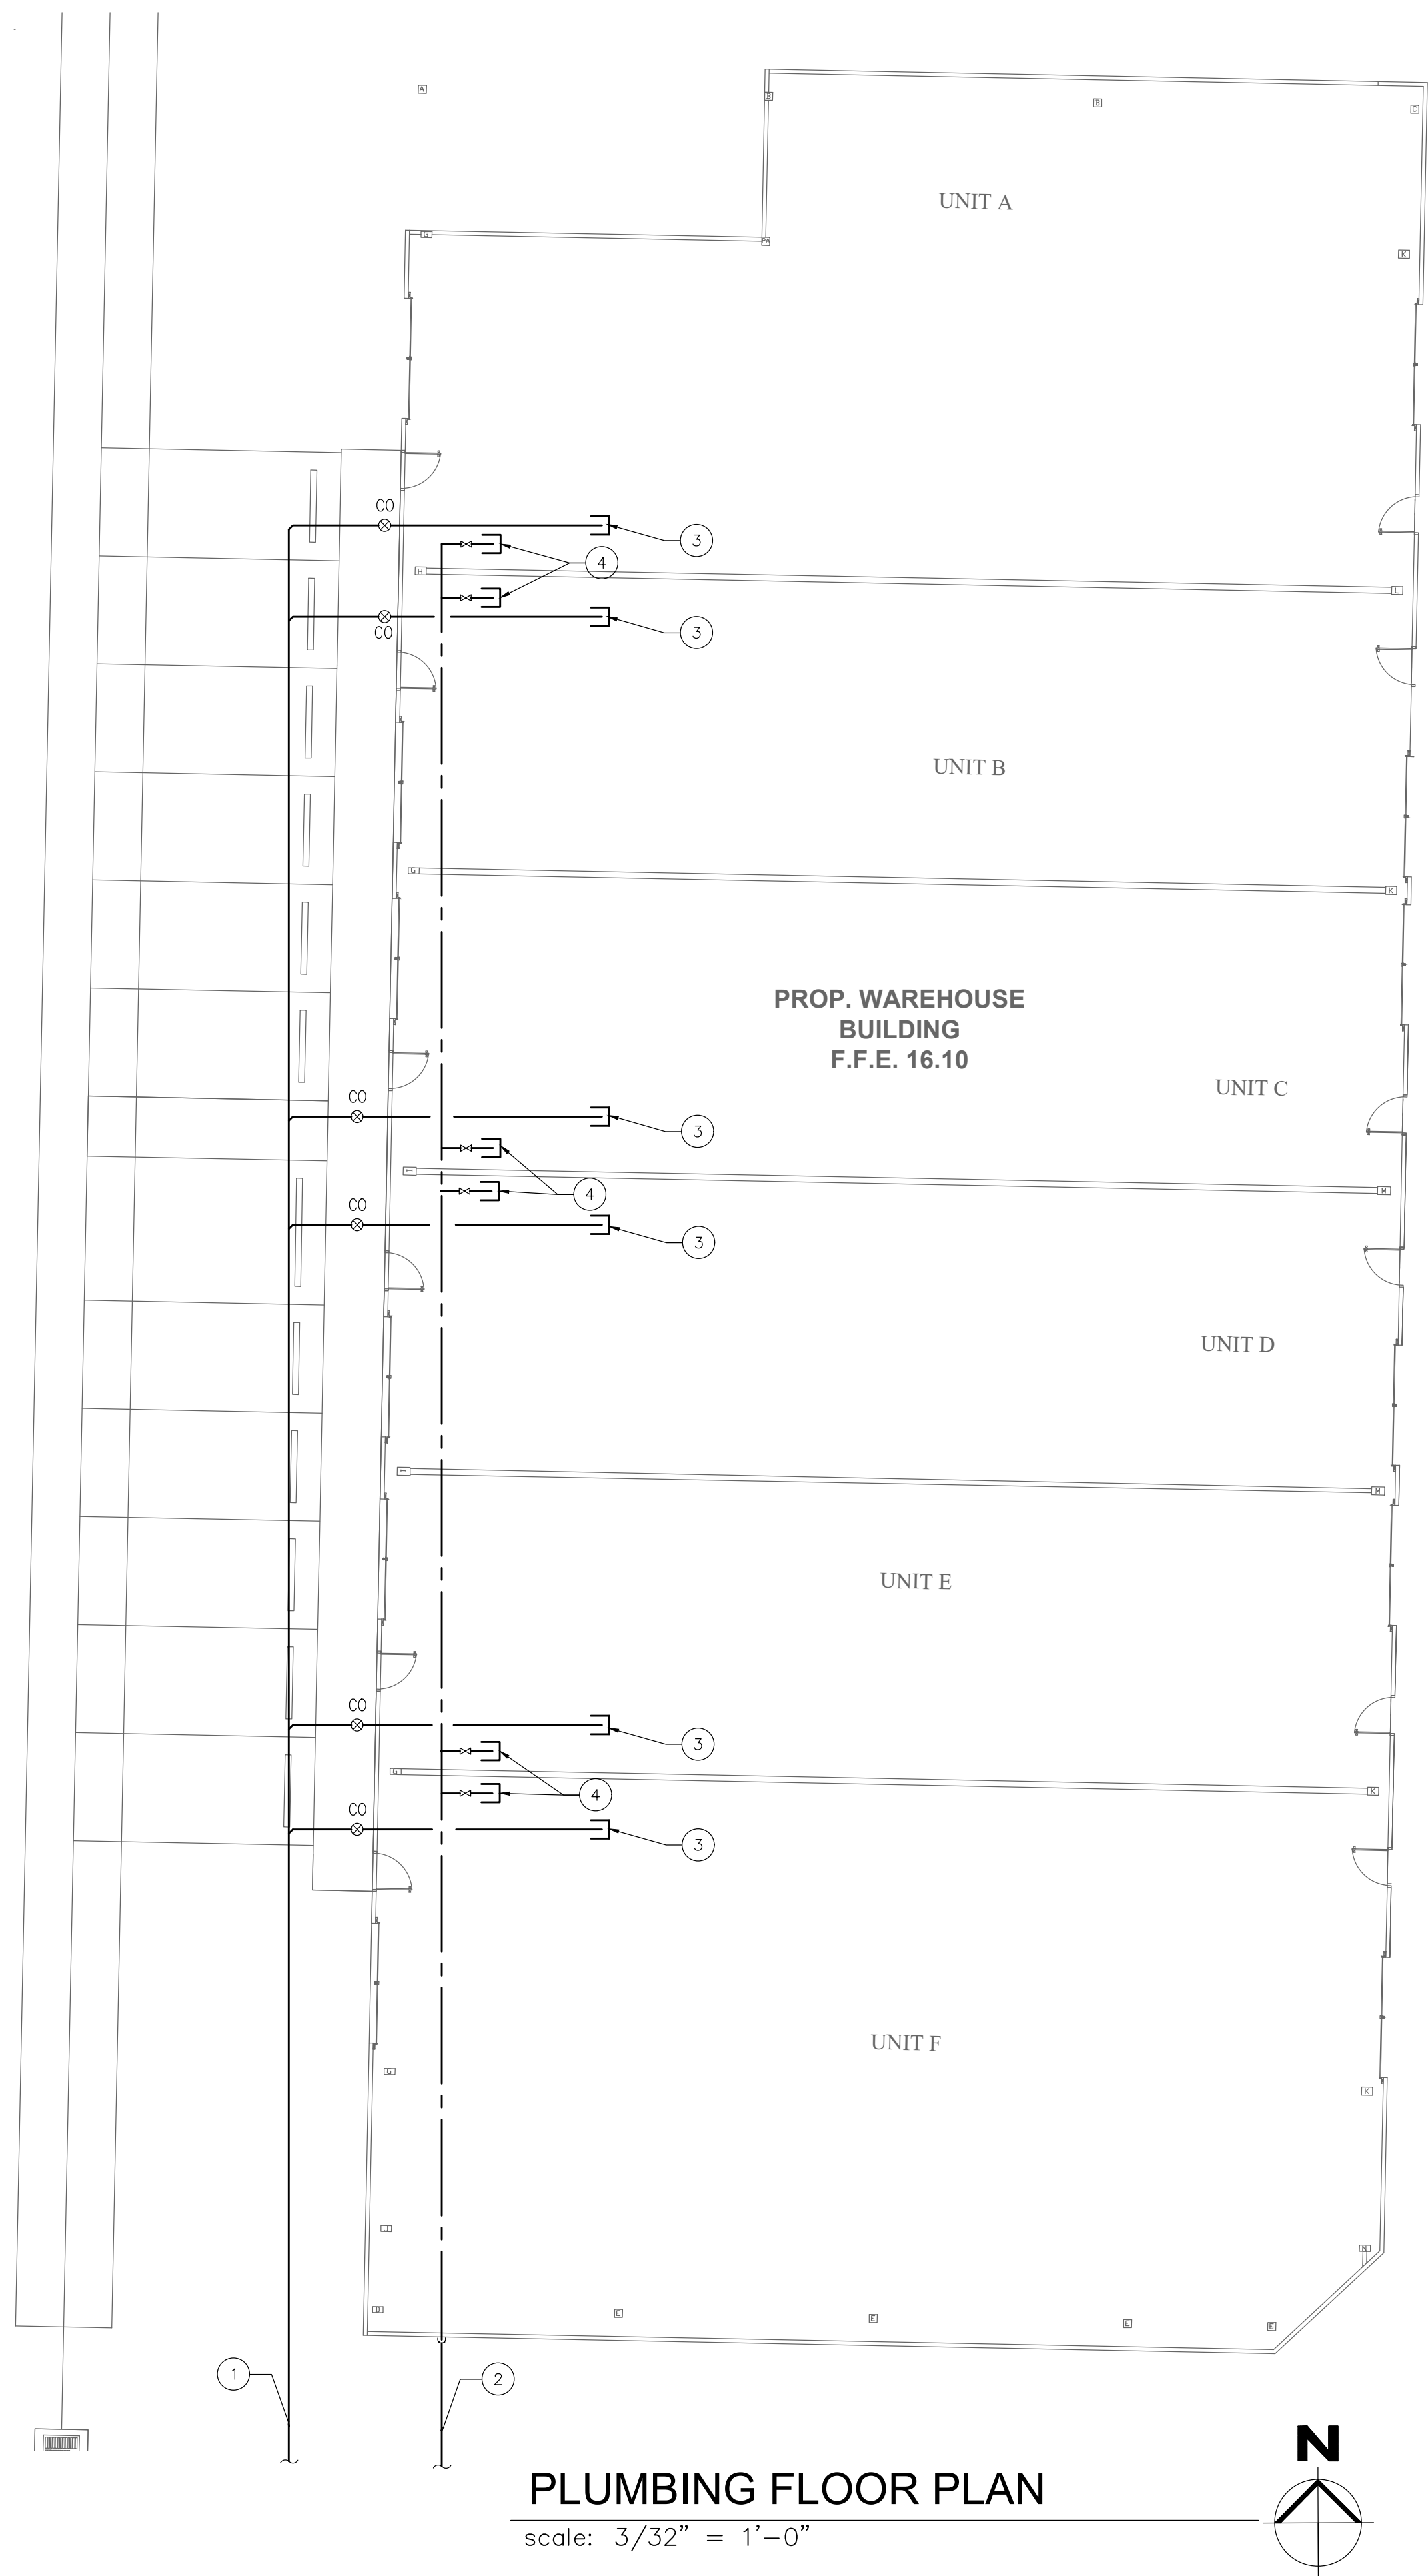


PLUMBING FLOOR PLAN

scale: 3/32" = 1'-0"

PLUMBING KEY NOTES


- ① TIE NEW 4" SANITARY TO EXISTING. SEE CIVIL PLANS FOR CONTINUATION.
- ② TIE NEW 2" CW TO EXISTING. SEE CIVIL PLANS FOR CONTINUATION.
- ③ 4" SANITARY STUB-OUT FOR FUTURE.
- ④ 1" CW STUB-OUT FOR FUTURE.

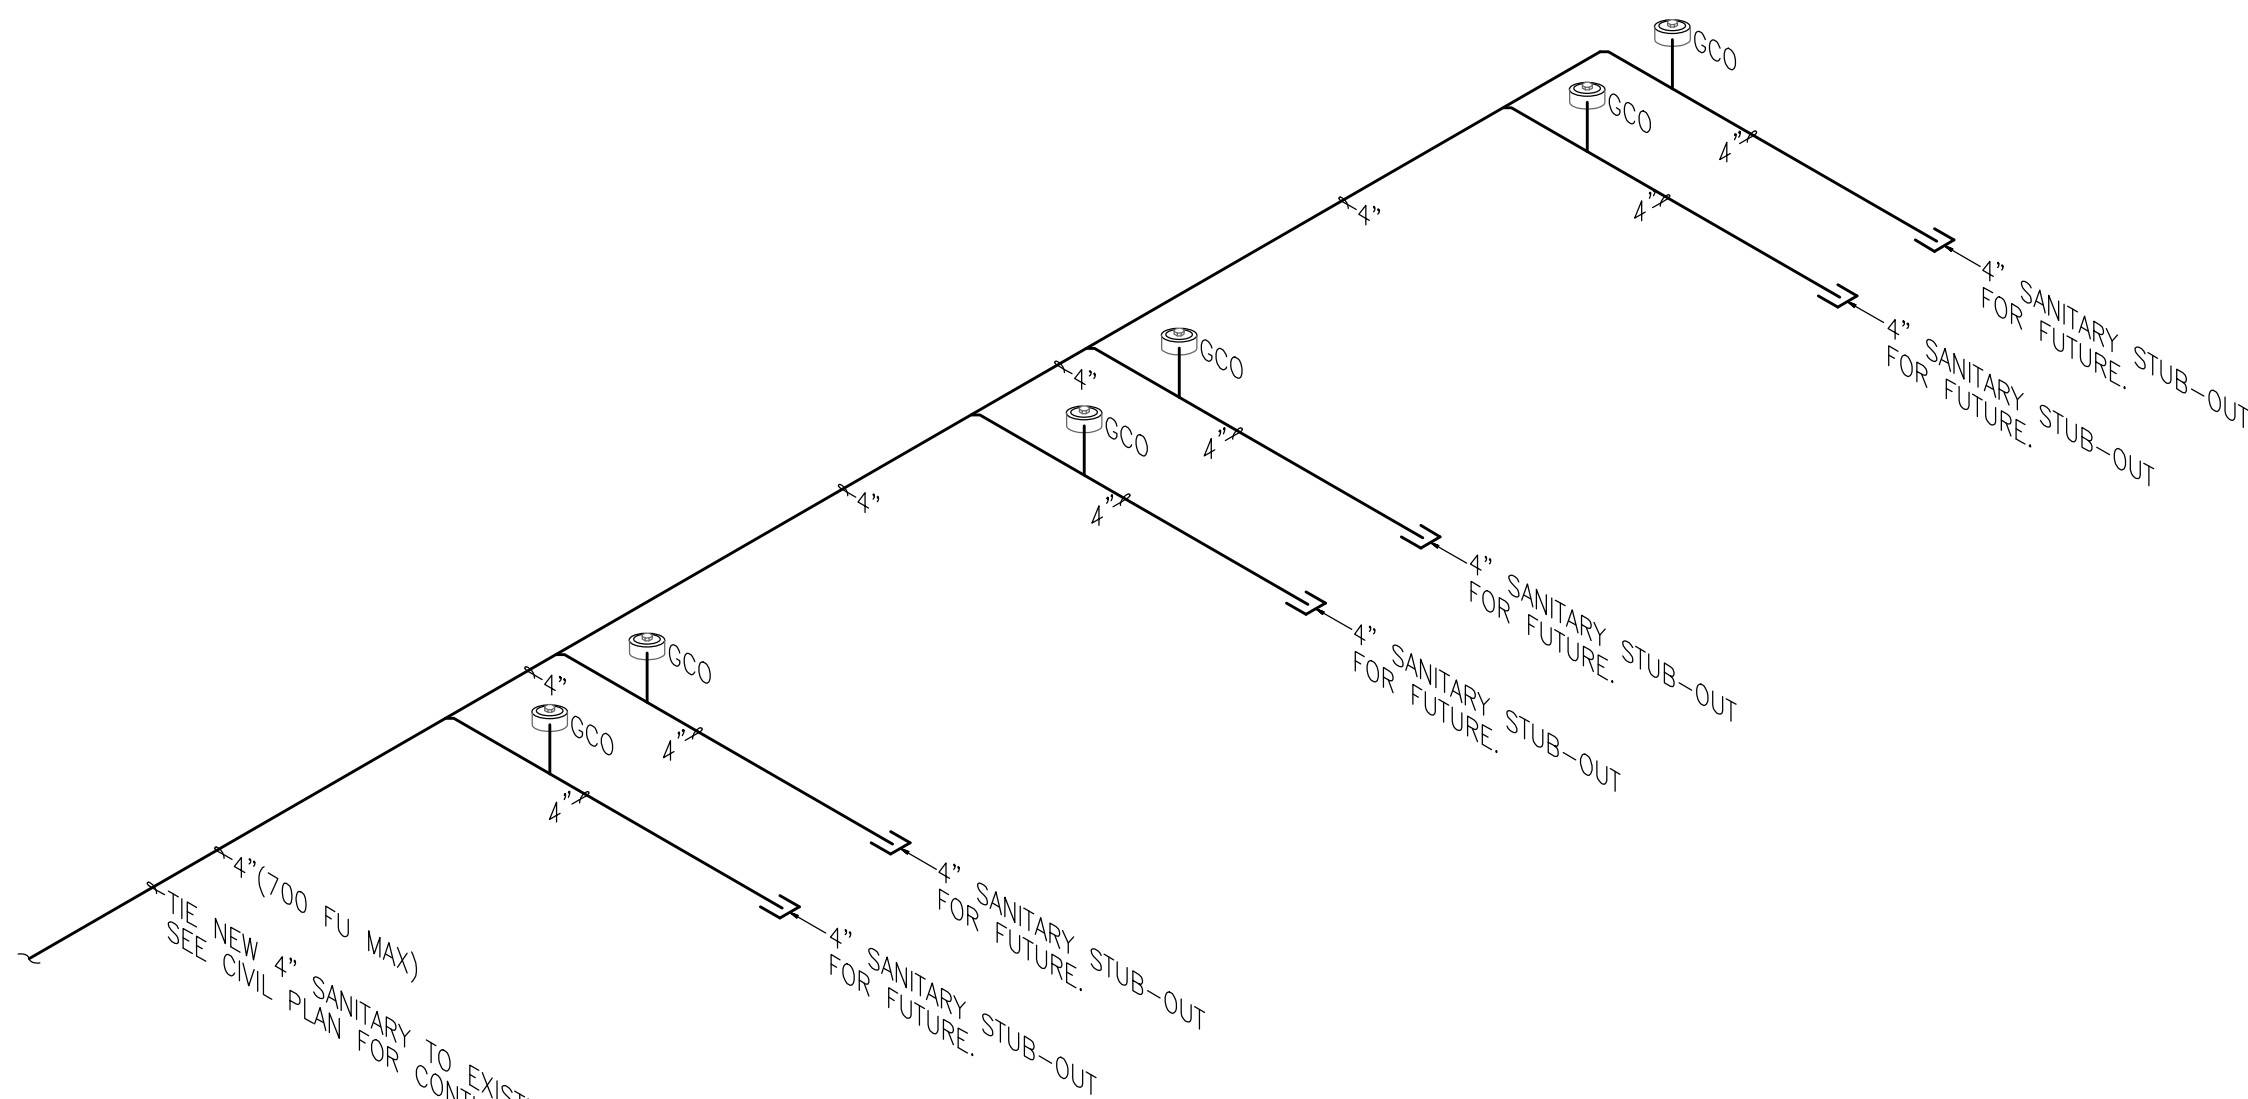

NOTE:
SLOPE ALL PIPING 2" AND LESS @ 1/4" PER L.F.
SLOPE ALL PIPING 3" AND ABOVE @ 1/4" OR 1/8" PER L.F.

SANITARY PIPING ISOMETRIC

NO SCALE

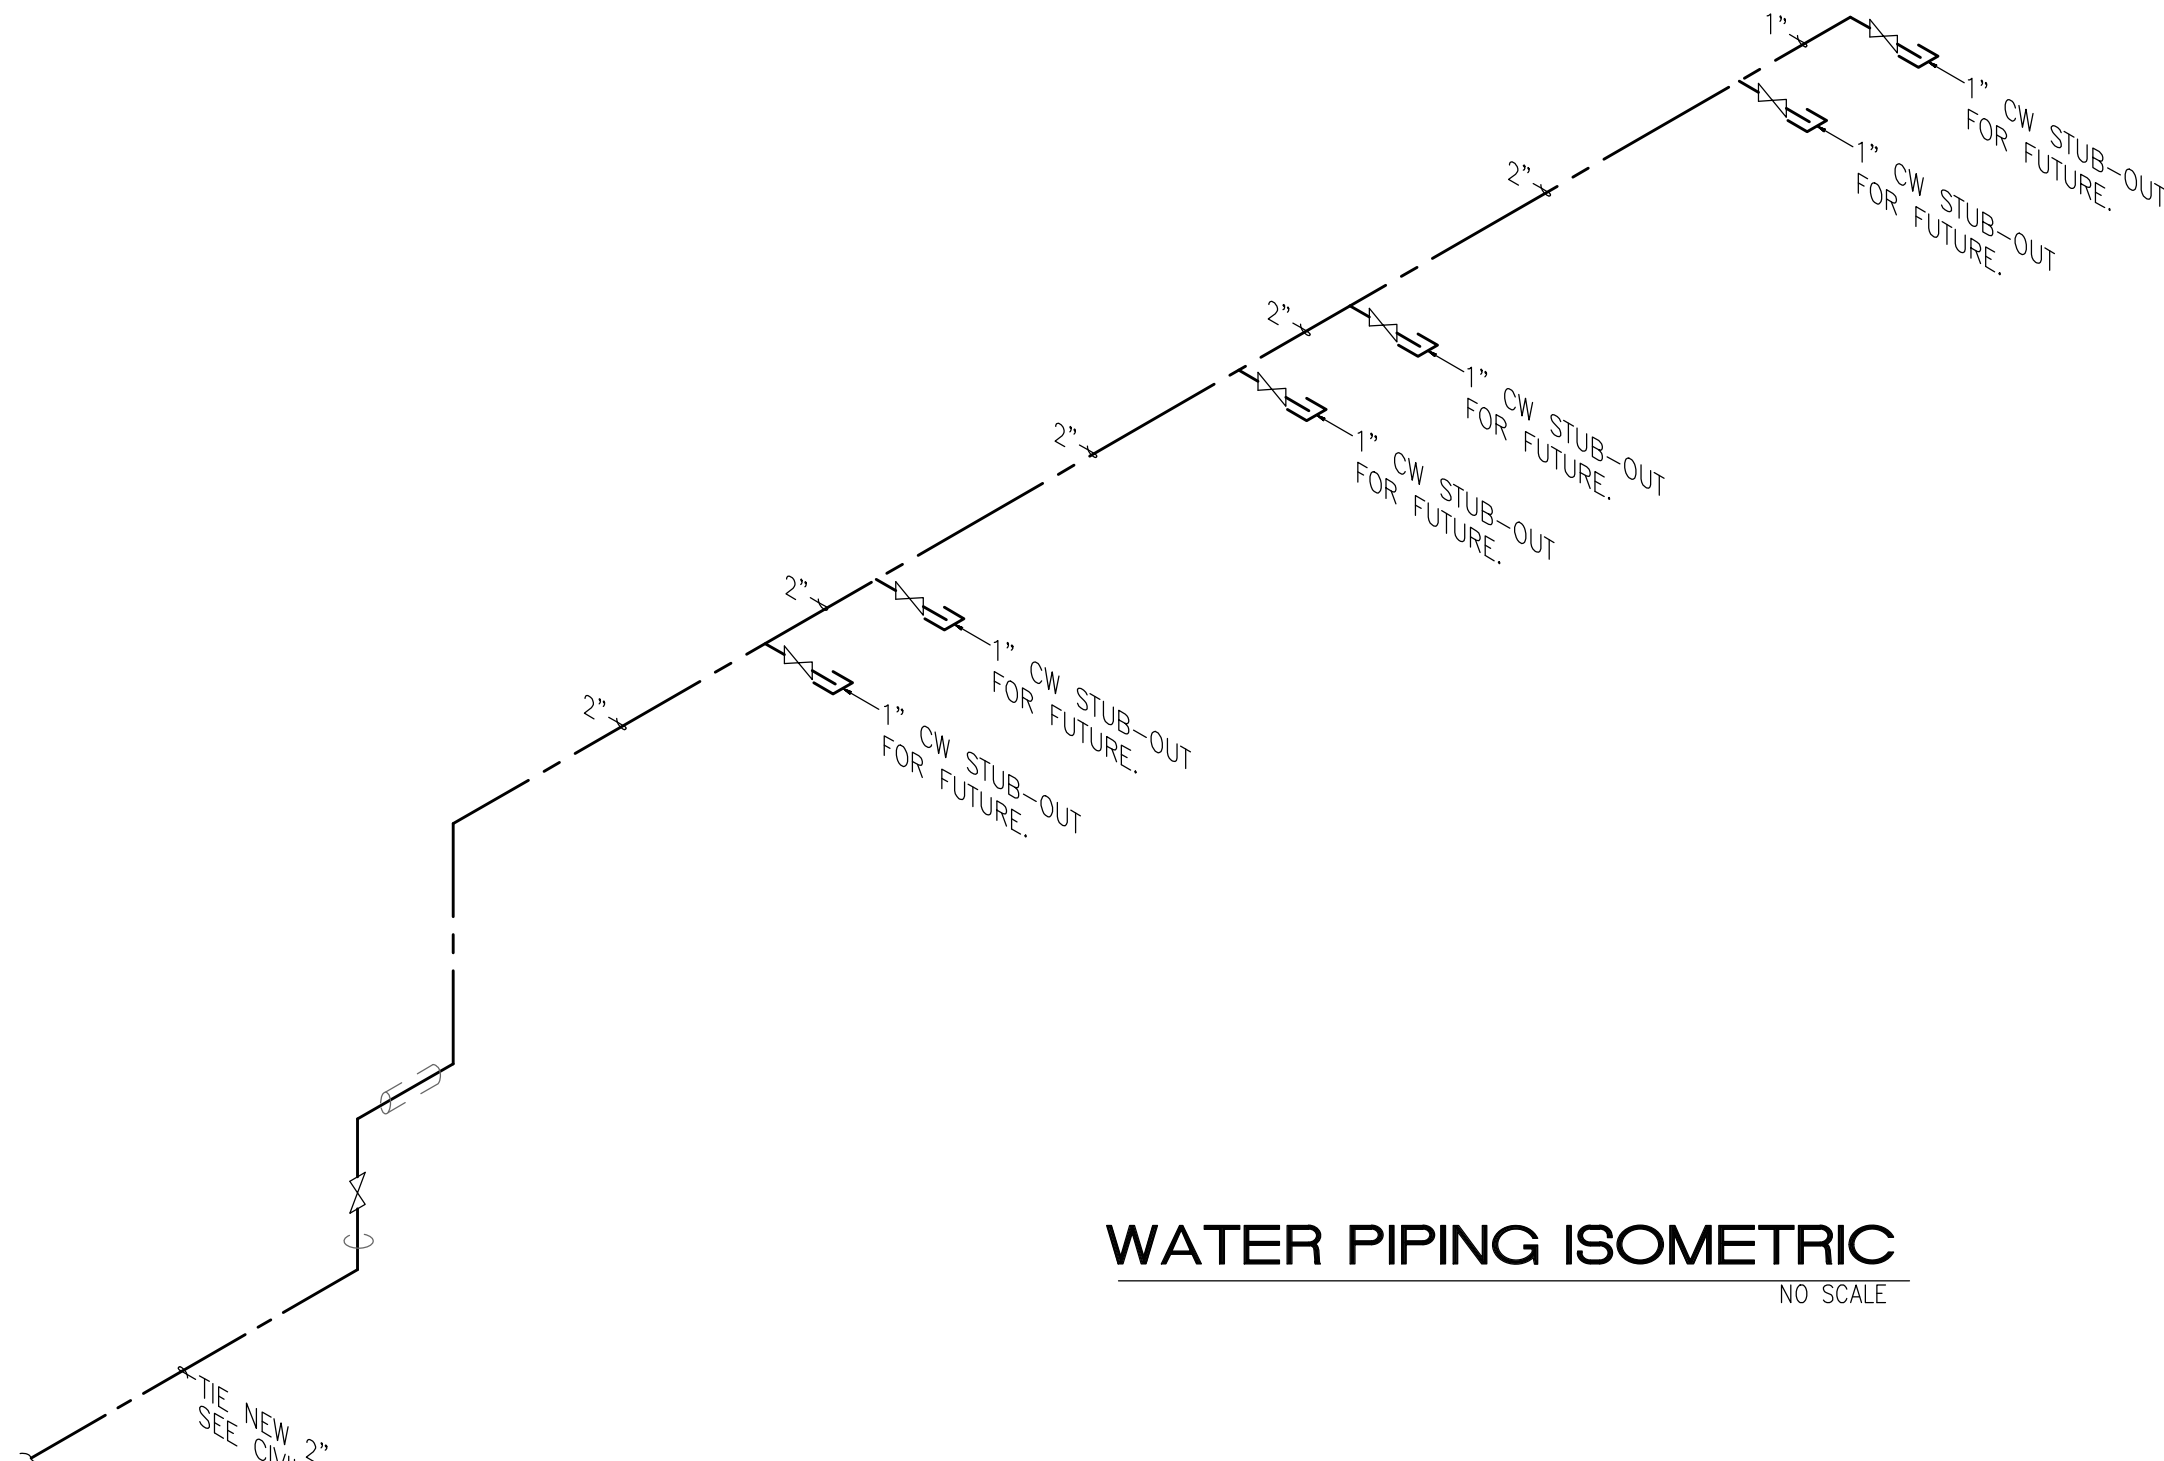

WATER PIPING ISOMETRIC

NO SCALE

GENERAL PLUMBING NOTES:

- A. ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE FBC (PLUMBING 2023 8TH ED.) AND WITH ALL APPLICABLE REGULATIONS.
- B. DRAWINGS: REFER TO ALL DRAWINGS FOR COORDINATION OF THE PLUMBING WORK.
- C. ARRANGE AND PAY FOR ALL PERMITS, LICENSES, INSPECTIONS AND TESTS. OBTAIN THE REQUIRED CERTIFICATES AND PRESENT TO OWNER.
- D. GUARANTEE: THE COMPLETED INSTALLATION SHALL BE FULLY GUARANTEED AGAINST DEFECTIVE MATERIALS AND/OR IMPROPER WORKMANSHIP FOR A MINIMUM OF ONE YEAR FOR MATERIAL AND LABOR.
- E. ALL HORIZONTAL SANITARY PIPING SHALL SLOPE AT 1/8 INCH PER FOOT MINIMUM FOR 3" AND LARGER AND AT 1/4" SLOPE FOR 2" PIPES AND SMALLER.
2. PLUMBING FIXTURES: FIXTURES SHALL BE AS SELECTED BY OWNER AND SHALL BE FURNISHED AND INSTALLED BY THIS CONTRACTOR. FIXTURES SHALL BE COMPLETE WITH DRAINS, TRAPS, SUPPLIES AND ANY OTHER ACCESSORY REQUIRED. FIXTURES AND FAUCETS SHALL COMPLY WITH THE FBC 2023 8TH ED. WATER SAVING STANDARDS.
3. MATERIALS:
 - STORM, SOIL, WASTE AND VENT: SANITARY PIPE, PVC, DWV, SCHEDULE 40.
 - DOMESTIC WATER: CPVC, TYPE L WITH SWEAT WROUGHT COPPER FITTINGS, TYPE "M" IN CONCEALED SPACES IS ACCEPTABLE. ISOLATE PIPING FROM CONCRETE WITH INSULATING MATERIAL.
 - DOMESTIC WATER SUPPLY ASSEMBLY: STAINLESS STEEL BRAIDED SUPPLY LINE WITH ANGLE SHUT OFF VALVES.
5. PIPING TEST AND DISINFECTIONS:
 - TEST: ALL SANITARY AND DOMESTIC WATER SUPPLY PIPING SHALL BE TESTED FOR LEAKS BEFORE PIPING IS CONCEALED OR CONNECTED TO EQUIPMENT AND PLUMBING FIXTURES.
 - DISINFECTION: ALL DOMESTIC WATER PIPING SHALL BE DISINFECTED BY INTRODUCING A SOLUTION OF CALCIUM HYPOCHLORITE OF 50 PARTS PER MILLION OF CHLORIDE AND AS PER AWWA STANDARDS.
6. CONTRACTOR SHALL COORDINATE EXACT LOCATION OF SANITARY AND DOMESTIC WATER PIPING BEFORE STARTING ANY WORK. NOTIFY ARCHITECT/ENGINEER OF ANY DEVIATIONS FROM DESIGN DRAWINGS.

PLUMBING SYMBOL LEGEND

SYMBOL	DESCRIPTION
---	SANITARY LINE
---	VENT LINE
CD	CONDENSATE LINE
---	GATE VALVE
---	COLD WATER LINE
---	HOT WATER LINE
P- FCO	PLUMBING FIXTURE DESIGNATION FLUSH CLEAN OUT
---	FLOOR PENETRATION
---	AIR CHAMBER
WCO	WALL CLEANOUT
VTR	VENT THRU ROOF



McLeod & Associates
Civil Engineers

The Foundry
1 Lakewood Blvd
P. 561.689
F. 561.689
www.mcleodmc.com

SEAL

8/13/2021

ITODD-seal.sig.png

FIELD:

DRAWN: BN

DESIGNED: TMM

APPROVED: TMM

PROJECT #21-030

REVISIONS

DATE

NO.

PLUMBING PLAN

1319 MANGONIA PARK WAREHOUSE

MANGONIA PARK, FLORIDA

SCALE: AS SHOWN
DATE: 8/13/2021

SHEET

P-1

OF 13

