

1. MATERIALS AND INSTALLATION, AS A MINIMUM, ARE TO CONFORM WITH THE 2020 EDITION OF THE NATIONAL ELECTRIC CODE, 2022 N.F.P.A. 72, 2021 N.F.P.A. 101, 2023 FLORIDA FIRE PREVENTION CODE, 2020 8TH EDITION, AND ALL OTHER APPLICABLE STANDARDS, INCLUDING ALL AMENDMENTS TO THE N.E.C. EQUIPMENT, WHERE APPLICABLE, WILL BE LISTED WITH THE UNDERWRITERS LABORATORIES, INC. QUALITY AND WORKMANSHIP ESTABLISHED BY DRAWINGS AND SPECIFICATIONS ARE TO BE REPRODUCED AS SHOWN. ANY DIFFICULTIES ENCOUNTERED WHICH COULD HAVE BEEN FORESEEN HAD AN EXAMINATION BEEN MADE, WILL NOT BE ALLOWED.
2. BIDDERS ARE TO VISIT THE SITE AND FAMILIARIZE THEMSELVES WITH EXISTING CONDITIONS AND SATISFY THEMSELVES AS TO THE NATURE AND SCOPE OF WORK. THE SUBMISSION OF A BID WILL BE EVIDENCE THAT SUCH AN EXAMINATION HAS BEEN MADE. LATER CLAIMS FOR LABOR, MATERIALS, OR OTHER ITEMS REQUIRED, OR ANY DIFFICULTIES ENCOUNTERED WHICH COULD HAVE BEEN FORESEEN HAD AN EXAMINATION BEEN MADE, WILL NOT BE ALLOWED.
3. ALL WORK SHALL BE PERFORMED BY A LICENSED ELECTRICAL CONTRACTOR IN A FIRST-CLASS WORKMANLIKE MANNER. THE COMPLETED SYSTEM IS TO BE FULLY OPERABLE AND ACCEPTANCE OF THIS SYSTEM BY THE ENGINEER MUST BE A CONDITION OF THE SUB CONTRACT.
4. ALL WORK SHALL BE COORDINATED WITH OTHER TRADES TO AVOID INTERFERENCE WITH THE PROGRESS OF CONSTRUCTION.
5. CONTRACTOR TO GUARANTEE ALL MATERIALS AND WORKMANSHIP FREE FROM DEFECTS FOR PERIOD OF NOT LESS THAN ONE (1) YEAR FROM DATE OF ACCEPTANCE.
6. CORRECTION OF ANY DEFECTS TO BE COMPLETED WITHOUT ADDITIONAL CHARGE AND TO INCLUDE THE NECESSARY REPAIR OF ANY OTHER PHASE OF THE INSTALLATION WHICH MAY HAVE BEEN DAMAGED THEREBY.
7. ALL REQUIRED INSURANCE TO BE PROVIDED FOR PROTECTION AGAINST PUBLIC LIABILITY OF PROPERTY DAMAGE FOR THE DURATION OF THE WORK.
8. CONTRACTOR TO PAY FOR ALL PERMITS, FEES INSPECTIONS AND TESTINGS.
9. ELECTRICAL INSTALLATION TO MEET ALL STANDARD REQUIREMENTS OF LOCAL POWER AND TELEPHONE COMPANIES. THE ELECTRICAL CONTRACTOR SHALL MEET AND COORDINATE WITH THE LOCAL POWER AND TELEPHONE COMPANIES AT THE SITE PRIOR TO CONSTRUCTION. AT THAT TIME, THE CONTRACTOR SHALL BE REQUIRED TO COORDINATE THE WORK WITH THE UTILITY COMPANIES' RESPONSIBILITIES TO MEET THE OWNER'S SCHEDULE.

10. CONTRACTOR SHALL SUBMIT 5 COPIES OF ELECTRICAL EQUIPMENT SHOP DRAWINGS, FIXTURES AND EQUIPMENT LAYOUTS OF ALL ELECTRICAL SPACES, ROOMS, ETC. TO THE ENGINEER FOR APPROVAL PRIOR TO ORDERING EQUIPMENT OR INSTALLING CONDUITS, ETC. THE LAYOUTS SHALL CONSIST OF PLAN VIEW AT A SCALE OF 1/2" = 1'-0" AND ELEVATIONS FOR EACH SUCH SPACE OR ROOM. ETC. NO SUBSTITUTIONS WILL BE ALLOWED WITHOUT THE PERMISSION OF THE ARCHITECT OR ENGINEER IN WRITING. ALL EQUIPMENT SHALL BE NEW AND BEAR THE MANUFACTURER'S NAME AND TRADE NAME. ALL EQUIPMENT SHALL BE U.L. LISTED.
  11. ALL WIRING SHALL BE IN CONDUIT UNLESS OTHERWISE NOTED. MINIMUM WIRE SIZE SHALL BE #12 AND WIRING SHALL BE IN 1/2" OR 3/4" RIGID OR PRECASTER BRANCH CIRCUIT WIRING. ALL CONDUCTORS SHALL BE COPPER WITH THWN/THHN INSULATION. CONDUCTORS #10 AND SMALLER MAY BE SIZED ALL THOSE #8 AND LARGER TO BE STRANDED.
  12. ALL UNDERGROUND RACEWAYS SHALL BE MINIMUM 3/4", GALVANIZED RIGID STEEL CONDUIT OR SCHEDULE 40 PVC. ALL OTHER RACEWAYS TO COMPLY WITH GOVERNING CODES. WHERE RIGID STEEL IS USED UNDERGROUND OR IN SLABS, IT SHALL BE COMPLETELY COATED WITH AN ALKALI RESISTANT EPOXY. WHERE RIGID STEEL IS USED IN WALLS OR CEILING, IT SHALL BE COATED WITH ZINC CHROMATE. RIGID STEEL SHALL ALSO BE USED WHEN CONDUIT IS EXPOSED TO EXTERIOR ENVIRONMENT SUCH AS EXTERIOR OF BUILDING OR WHERE IT IS EXPOSED AND SUBJECT TO DAMAGE INSIDE OF BUILDING. EMT IS NOT PERMITTED IN SLABS. ALUMINUM CONDUIT SHALL NOT BE PERMITTED IN SLABS.
  13. OUTLET BOXES SHALL BE PRESSED STEEL IN DRY LOCATIONS, CAST ALLOY WITH THREADED HUBS IN WET OR DAMP LOCATIONS, AND BE OF SPECIAL CONSTRUCTION FOR OTHER CLASSIFIED LOCATIONS. OUTLET BOXES SHALL BE RECESSED (FLUSH) IN WALLS OR CEILINGS WHENEVER POSSIBLE. OUTLET BOXES SHALL BE FOUR INCH SQUARE FOR SWITCHES AND RECEPTACLES AND FOUR INCH OVAL FOR LIGHTING FIXTURES, WITH APPROVED PLASTER RINGS AND COVERPLATES. WHEN MULTIPLE SWITCHES OCCUR IN ONE LOCATION ON THE PLANS, PROVIDE A MULTI-GANG OUTLET BOX AND A COMMON COVER PLATE. PROVIDE BARRIERS WITHIN THE BOX AS MAY BE REQUIRED BY CODE.
  14. DISCONNECT SWITCHES SHALL BE H.P. RATED, GENERAL DUTY, QUICK-MAKE, QUICK-BREAK TYPE. ENCLOSURES SHALL AS BE REQUIRED BY N.E.C. AND LOCATION (WEATHERPROOF, EXPLOSION PROOF, ETC.). ENGRAVED LAMINATED PLASTIC IDENTIFICATION PLATES SHALL BE FURNISHED AND IDENTIFY EACH SWITCH AND DISCONNECT.
  15. ALL FUSES FOR SAFETY SWITCHES SHALL BE DUAL ELEMENT, CARTRIDGE TYPE. FUSES SHALL BE THOSE MANUFACTURED BY EITHER BUSMAN OR LITTELFUSE. THE CONTRACTOR SHALL FURNISH TO THE OWNER ONE SPARE FUSE FOR EACH SIZE AND TYPE OF FUSE INSTALLED. FUSES 600 AMPS OR LESS SHALL BE CLASS RK1, TYPICAL UNLESS OTHERWISE NOTED. FUSES OVER 600 AMPS SHALL BE CLASS L.
  16. ALL GENERAL PURPOSE SWITCHES AND RECEPTABLES SHALL BE THE PRODUCT OF A SINGLE MANUFACTURER. CATALOG NUMBERS LISTED ARE LEVITON; HOWEVER, COMPARABLE DEVICES BY PASCO, GOSWAMI, OR OTHER MANUFACTURER MAY BE ACCEPTED. COLOR OF DEVICES AND PLATES SHALL BE DICTATED BY ARCHITECT/OWNER.
    - A. SWITCHES: LEVITON #CSB1-20I
    - B. RECEPTABLES: LEVITON #R20-1
    - C. COVER PLATES: STEEL
- NOTE: ALL OTHER REQUIRED DEVICES SHALL MATCH IN COLOR AND STYLE.




17. IT IS NOT THE INTENT OF THESE PLANS TO SHOW EVERY MINOR DETAIL OF CONSTRUCTION. THE CONTRACTOR IS EXPECTED TO FURNISH AND INSTALL ALL ITEMS FOR A COMPLETE ELECTRICAL SYSTEM, AND PROVIDE ALL NECESSARY DEVICES AND COMPONENTS FOR EQUIPMENT BE PLACED IN PROPER WORKING ORDER.
18. A SEPARATE, GREEN TYPE THWN COPPER GROUND CONDUCTOR SHALL BE RUN FROM EACH LOAD LUG OF EACH GROUND RECEPTACLE TO AN APPROVED CONNECTION INSIDE THE ENCLOSING STEEL OUTLET BOX. DEVICE MOUNTING SCREWS SHALL NOT BE CONSIDERED AN APPROVED GROUND.  
  
A SEPARATE GROUND CONDUCTOR SHALL BE INSTALLED IN EVERY CONDUIT AND RACEWAY AND SEPARATE AN ELECTRICAL GROUNDING TERMINAL AT BOTH ENDS OF THE RUN. THE GROUNDING CONDUCTOR SHALL BE SIZED IN ACCORDANCE WITH TABLE 250-122 OF THE N.E.C. CONTRACTOR SHALL SIZE CONDUIT TO ACCOMMODATE ADDITIONAL CONDUCTOR.
19. ALL CONNECTIONS TO GROUND ROOS SHALL BE MADE WITH U.L. APPROVED CONNECTIONS, IF NECESSARY THE CONTRACTOR SHALL FORM A GROUNDING ELECTRODE SYSTEM PER N.E.C. 250-50.
20. LOAD DATA IS BASED ON INFORMATION GIVEN TO THE ENGINEER AT THE TIME OF DESIGN. VERIFY ALL EQUIPMENT NAMEPLATE RATINGS BEFORE ORDERING.
21. CIRCUITS SHOWN ON PLANS ARE TO DETERMINE LOAD DATA AND PANEL SIZES. THE CONTRACTOR IS TO PROVIDE CIRCUITS AND ROUTING OF CONDUITS TO SUIT JOB CONDITIONS.
22. FURNISH AND INSTALL DISCONNECT SWITCHES, WIRING, AND CONNECTIONS ON AIR CONDITIONING SYSTEMS AS SHOWN ON ELECTRICAL AND MECHANICAL PLANS. ELECTRICAL CONTRACTOR SHALL VERIFY COORDINATE WITH MECHANICAL CONTRACTOR REGARDING DISCONNECT SWITCH SIZES FOR EQUIPMENT LOADS AS WELL AS INSTALLATION OF ALL REQUIRED CONTROLS.
23. PROVIDE NON-FUSIBLE GENERAL DUTY SAFETY SWITCHES AT ALL PUMPS NOT VISIBLE FROM PANELBOARD CIRCUIT BREAKERS. DISCONNECT SIZES SHALL BE AS PER MANUFACTURER'S RECOMMENDATIONS.
24. ALL ELECTRICAL EQUIPMENT SHALL BE RAINTIGHT (NEMA 3R) WHERE EXPOSED TO THE WEATHER. ALL FLEX CONDUITS CONNECTED TO SUCH EQUIPMENT SHALL BE LIQUIDTIGHT.
25. ALL SWITCHGEAR, PANELS, STARTERS, CONTACTORS ETC., SHALL BE THE PRODUCT OF A SINGLE MANUFACTURER, THE SYSTEM DESIGN IS BASED ON SQUARE "D"; HOWEVER, COMPARABLE EQUIPMENT BY G.E. & SIEMENS ONLY WILL BE ACCEPTABLE. TANDEN AND HALF-SPACE CIRCUIT BREAKERS SHALL NOT BE USED.
26. TYPEWRITTEN CIRCUIT INDEX SHALL BE AFFIXED TO INSIDE SURFACE OF EACH PANELBOARD DOOR, CLEARLY INDICATING AREA AND TYPE OF LOAD SERVED BY EACH BRANCH CIRCUIT PROTECTIVE DEVICE, INCLUDING SPARES. HAND PRINTED WILL NOT BE ACCEPTED.

27. ENGRAVED, LAMINATED PLASTIC IDENTIFICATION PLATES SHALL BE FURNISHED AND INSTALLED ON ALL PANELS AND SWITCHGEAR (INCLUDING SAFETY SWITCHES AND MOTOR CONTROL PUSHER/STOP STATIONS). PLATES SHALL BE AFFIXED TO FRONT PANELS, INDICATING PANEL NAME, VOLTAGE, AMPERAGE. PANELS SHALL BE BLACK PANELS WITH WHITE LETTERING, MINIMUM 1/4" HIGH.
28. ALL CIRCUIT BREAKERS SHALL BE INVERSE TIME TYPE (THERMAL-MAGNETIC), MULTI-POLE BREAKERS SHALL HAVE COMMON TRIP WITH INTEGRAL MECHANISM. HANDLE TIES SHALL NOT BE PERMITTED. PANELBOARDS SHALL HAVE COPPER BUSS WITH FULL CAPACITY NEUTRAL AND GROUNDING BARS. ALL CIRCUITS SHALL BE FULLY BUSSED TO THE PANELS TO FULL LENGTH WITH ALL NECESSARY HARDWARE TO ACCOMMODATE CIRCUIT BREAKERS.
29. ALL UNDERGROUND PVC CONDUIT RUNS SHALL HAVE RIGID STEEL ELBOWS AND RIGID STEEL SECTIONS AT SLAB PENETRATIONS WHERE SUBJECT TO POSSIBLE DAMAGE. WHERE RIGID STEEL IS USED, IT SHALL BE COMPLETELY COATED WITH AN ALKALI AND RUST-RESISTANT BITUMASTIC PAINT. ALL RISERS AND DOWN RUNS SHALL BE RIGID STEEL WITH CHROMATE-RESISTANT UNDERGROUND ELECTRICAL CONDUITS. PRIDE PULL BOXES. SUCH THAT ANY SINGLE CONDUIT RUN HAS BENDS IN EXCESS OF 360 DEGREES, OR 180 DEGREES FOR TELEPHONE. PULLBOXES SHALL BE SUITABLE AND APPROVED FOR THE INTENDED USE AND WITH IRON COVERS. WARNING TAPES WHICH READ "WARNING BURIED ELECTRIC" SHALL BE PLACED AT REGULAR INTERVALS ABOVE ALL ELECTRICAL CONDUITS WHERE CONDUITS ARE UNDER FLOOR OR SLAB. ALL CONDUITS UNDER FLOOR SHALL BE PVC SCHEDULE 80 ENCASED IN CONCRETE OR DIRECT BURIED GRS. WHERE UNDERGROUND CONDUITS ARE NOT EXPOSED TO MECHANICAL DAMAGE OR ARE NOT UNDER PAVED AREAS, THEY SHALL BE PVC SCHEDULE 80. ELBOWS AND RISERS SHALL BE GRS.
30. ALL ELECTRICAL CONDUITS SHALL BE INSTALLED IN AN APPROVED REACEWAY, EMT, MC, RIGID OR FLEXIBLE CONDUIT. CONDUITS SHALL BE INSTALLED IN SUCH A MANNER THAT THERE SHALL BE NO TYPE "NM" (ROMEX) OR ELECTRICAL NON-METALLIC TUBING USED FOR BRANCH CIRCUITING. EMT MAY BE USED IN WALLS OR ON CEILINGS WHERE NOT SUBJECT TO MECHANICAL DAMAGE, DAMP OR CORROSIVE CONDITIONS. USE LIQUID TIGHT FLEXIBLE CONDUIT TO BE USED WHERE REQUIRED. CONDUITS SHALL BE INSTALLED WHERE REQUIRED IN HAZARDOUS AREAS ONLY. ALL CONDUITS IN HAZARDOUS AREAS (PER NEC) SHALL MEET THE REQUIREMENTS OF NEC CHAPTER 5. MAXIMUM NUMBER OF 120V CIRCUITS ALLOWED IN A COMMON CONDUIT SHALL BE THREE (3). THE CONTRACTOR SHALL STRICTLY CONFORM TO THE N.E.C. REQUIREMENTS FOR CONDUIT SIZES. THE CONTRACTOR SHALL PROVIDE A MINIMUM NUMBER OF RECEPTABLES PER DEDICATED CIRCUIT SHALL BE PER APPLICABLE CODES.


- CONDUCTORS SHALL BE COLOR CODED AS FOLLOWS:

| 200V SYSTEM     | 240V SYSTEM     | 480V SYSTEM      | PHASE SEQUENCE       |
|-----------------|-----------------|------------------|----------------------|
| NEUTRAL - WHITE | NEUTRAL - WHITE | NEUTRAL - GREY   | ABC, TOP TO BOTTOM   |
| PHASE - BLACK   | PHASE - BLACK   | PHASE - BROWN    | LEFT TO RIGHT, FRONT |
| PHASE B - RED   | PHASE C - BLUE  | PHASE B - PURPLE | TO BACK              |
| PHASE C - BLUE  | GRD.CON - GREEN | PHASE C - YELLOW |                      |
| GRD.CON - GREEN |                 | GRD.CON - GREEN  |                      |

  32. CONTRACTOR SHALL BE RESPONSIBLE FOR SEALING ALL CONDUIT PENETRATIONS MADE THROUGH FIRE RATED WALLS, CEILINGS, SLABS, ETC. PENETRATION SEALS SHALL BE PER U.L. ASSEMBLY STANDARDS.
  33. CONTRACTOR SHALL MAINTAIN A COMPLETE SET OF CONTRACT DRAWINGS AT JOB SITE WITH COLORED MARKINGS INDICATING PROGRESS OF WORK. THIS SET OF CONTRACT DRAWINGS IS TO BE SEPARATE FROM AND IN ADDITION TO CONTRACTOR'S CONSTRUCTION SET. EVERY UNIT OF EQUIPMENT, DEVICE, CONDUIT AND WIRE IS TO BE MARKED WHEN INSTALLED. USE GREEN TO INDICATE INSTALLATION AS SHOWN ON DRAWINGS AND USE RED TO INDICATE FIELD CHANGES. UPON COMPLETION OF WORK, THIS SET OF CONTRACT DRAWINGS IS TO BE TURNED OVER TO, AND BECOME PROPERTY OF THE ELECTRICAL ENGINEER.
  34. IF ELECTRICAL CONTRACTOR HAS QUESTIONS, OR IN THEIR OPINION FINDS OMISSIONS OR ERRORS IN ELECTRICAL DOCUMENTS, IT IS THEIR RESPONSIBILITY TO BRING THIS TO THE ATTENTION OF THE ELECTRICAL ENGINEER IMMEDIATELY. IF ELECTRICAL CONTRACTOR PROCEEDS WITH ANY CHANGES TO THE CONTRACT DOCUMENTS, WITHOUT WRITTEN PRIOR APPROVAL FROM THE ELECTRICAL ENGINEER, CONTRACTOR WILL NOT BE COMPENSATED.
  35. CONTRACTOR SHALL PROVIDE ACCURATE AS-BUILT DRAWINGS AND EQUIPMENT OPERATION MANUALS TO THE BUILDING OWNER PRIOR TO FINAL ACCEPTANCE OR CLOSEOUT IN ACCORDANCE WITH F.B.C. ENERGY CONSERVATION, 2023 EDITION, ARTICLE 405.5.4.
  36. TESTS: THE CONTRACTOR SHALL TEST ALL OF THE EQUIPMENT INSTALLED UNDER THIS CONTRACT AND DEMONSTRATE ITS PROPER OPERATION TO THE OWNER'S REPRESENTATIVE. THE CONTRACTOR SHALL PROVIDE ALL REQUIRED LABOR, MATERIAL AND INSTRUMENTS FOR THE TESTS.
  37. OPERATING INSTRUCTIONS: UPON COMPLETION OF ALL WORK AND OF ALL TESTS, FURNISH THE NECESSARY SKILLED LABOR AND HELPERS FOR OPERATING ALL ELECTRICAL SYSTEMS AND EQUIPMENT IN ORDER TO INSTRUCT AND TRAIN THE OWNER'S REPRESENTATIVE IN THE OPERATION AND MAINTENANCE OF ALL EQUIPMENT OWNED.
  38. THE ELECTRICAL PLANS ARE DIAGRAMMATIC ONLY. REFER TO ARCHITECTURAL PLANS FOR EXACT DIMENSIONS OF STRUCTURE.
  39. CONTRACTOR SHALL UPDATE EXISTING PANELBOARD SCHEDULES TO INDICATE SPECIFIC LOADS FOR EACH CIRCUIT BREAKER IN ACCORDANCE WITH N.E.C., 2020 EDITION, ARTICLE 408.4A AND F.B.C. ENERGY CONSERVATION, 2023 EDITION, ARTICLE 405.5.4.
  40. ALL PANELBOARD FEEDERS AND RESPECTIVE BRANCH CIRCUITS SHALL HAVE A COMBINED VOLTAGE DROP SHALL NOT EXCEED 5% VOLT PER F.B.C. ENERGY CONSERVATION, 2023 EDITION, ARTICLE 405.5.3.
  41. ALL LIGHT AND RECEPTACLE CIRCUITS OVER 100 FEET ON 120 VOLT CIRCUIT AND 200 FEET ON 277 VOLT CIRCUIT FROM PANEL TO LAST OUTLET SHALL HAVE CONDUCTORS ONE SIZE LARGER THAN NORMALLY REQUIRED.
  42. THE CIRCUIT NUMBERS ARE FOR IDENTIFICATION PURPOSE ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CORRECTLY PHASING THE CIRCUITS IN THE PANEL. ELECTRICAL LOADS SHALL BE DISTRIBUTED AND BALANCED EVENLY WITHIN 10% OF THE HIGHEST PHASE LOAD. HOWEVER, IF SIMILAR SINGLE PHASE CIRCUITS MAY BE COMBINED IN ONE CONDUIT WITH A COMMON NEUTRAL (A,B,C,N).
  43. PROVIDE GFI CIRCUITS FOR ALL WAREHOUSE AND EXTERIOR OUTLETS AND AS SHOWN ON PLANS. ALL RECEPTACLES WITHIN 6'-0" OF A SINK SHALL BE GFI TYPE.
  44. IN GENERAL, PROVIDE TAMPER PROOF RECEPTACLES.
  45. DO NOT INSTALL OUTLETS BACK TO BACK. OFFSET 12" MINIMUM TO MINIMIZE NOISE TRANSFER.
  46. ALL WALL MOUNTED LIGHT FIXTURES ARE 76" A.F.F. U.N.O.
  47. LIGHTING CONTROL SHALL BE BASED UPON F.B.C. ENERGY CONSERVATION, 2023 EDITION, 405.2. EGRESS LIGHTING SHALL BE 1 FOOTCANDLE MINIMUM PER F.B.C. 1008. LIGHTING DESIGN SHALL COMPLY WITH F.B.C. CE 405.1 FOR ILLUMINATION.
  48. LIGHTING PERFORMANCE CALCULATIONS SHALL BE BASED UPON F.B.C. ENERGY CONSERVATION, 2023 EDITION, ARTICLE 405.3.2.2 WHERE SPACE BY SPACE METHOD SHALL BE USED.
  49. ALL EXIT AND EMERGENCY LIGHTING SHALL HAVE BATTERY BACK-UP AND COMPLY WITH NEC 700.12(F) AND SHALL BE OPERABLE AT TIME OF INSPECTION.
  50. LOW VOLTAGE PERMIT TO BE APPLIED FOR SEPARATELY, SEE EQUIPMENT DRAWINGS FROM SYSTEMS VENDOR FOR DETAILS OF LOW VOLTAGE EQUIPMENT LOCATIONS.
  51. CIRCUIT BREAK DISCONNECTING MEANS SHALL BE IN ACCORDANCE WITH ART. 422.31(B)&(C) OF THE 2020 N.E.C. WHERE THE BRANCH CIRCUIT BREAKER IS CAPABLE OF BEING LOCKED IN THE OPEN POSITION, THE PROVISION FOR LOCKING OR ADDING A LOCK TO THE BREAKER SHALL BE INSTALLED ON OR AT THE BREAKER USED AS THE DISCONNECTING MEANS AND SHALL REMAIN IN PLACE WITH OR WITHOUT THE LOCK INSTALLED. THIS APPLIES TO HAND DRYER BRANCH CIRCUITS.

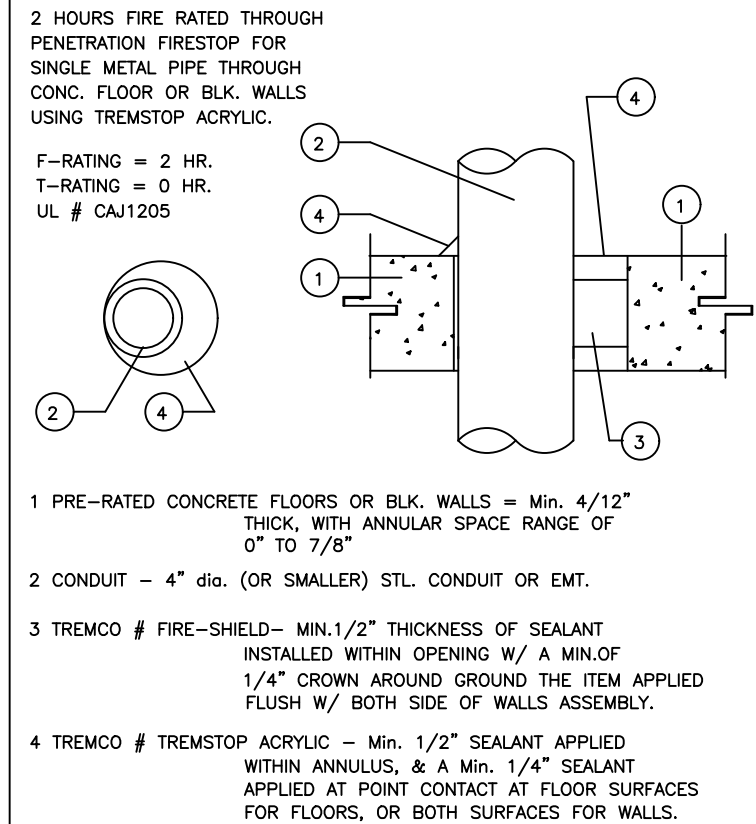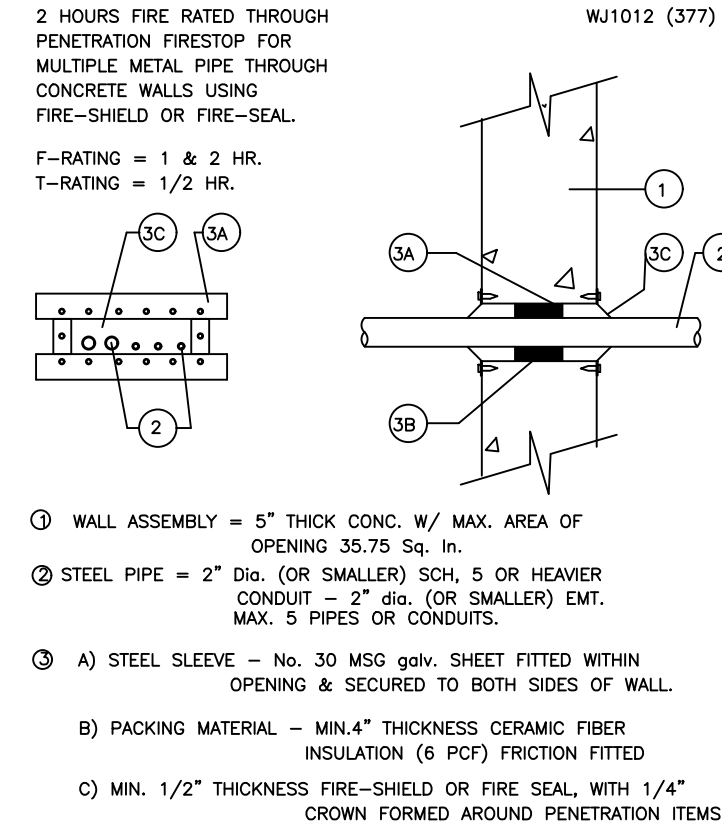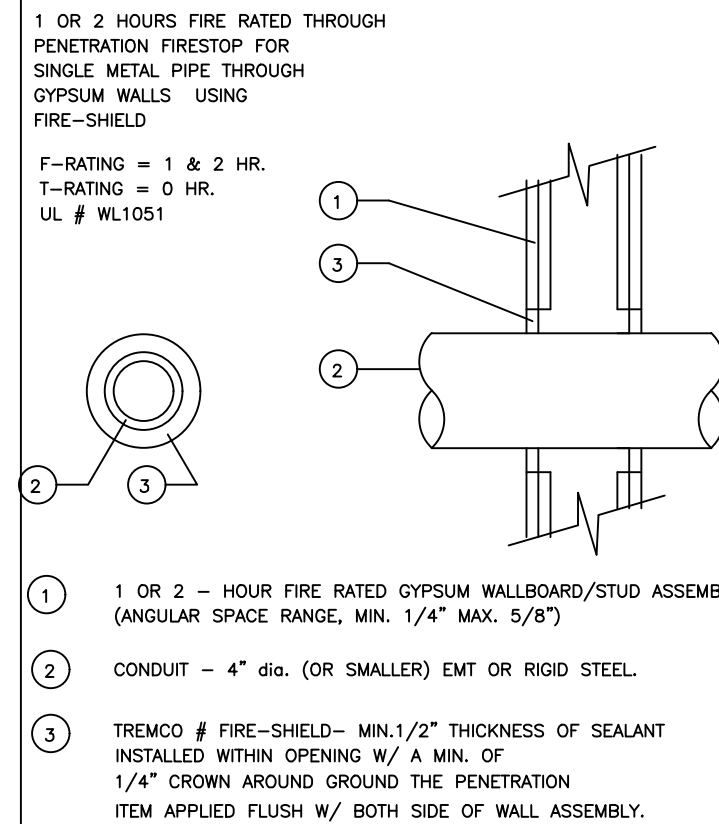


## 7 FIRE STOPPING DETAILS

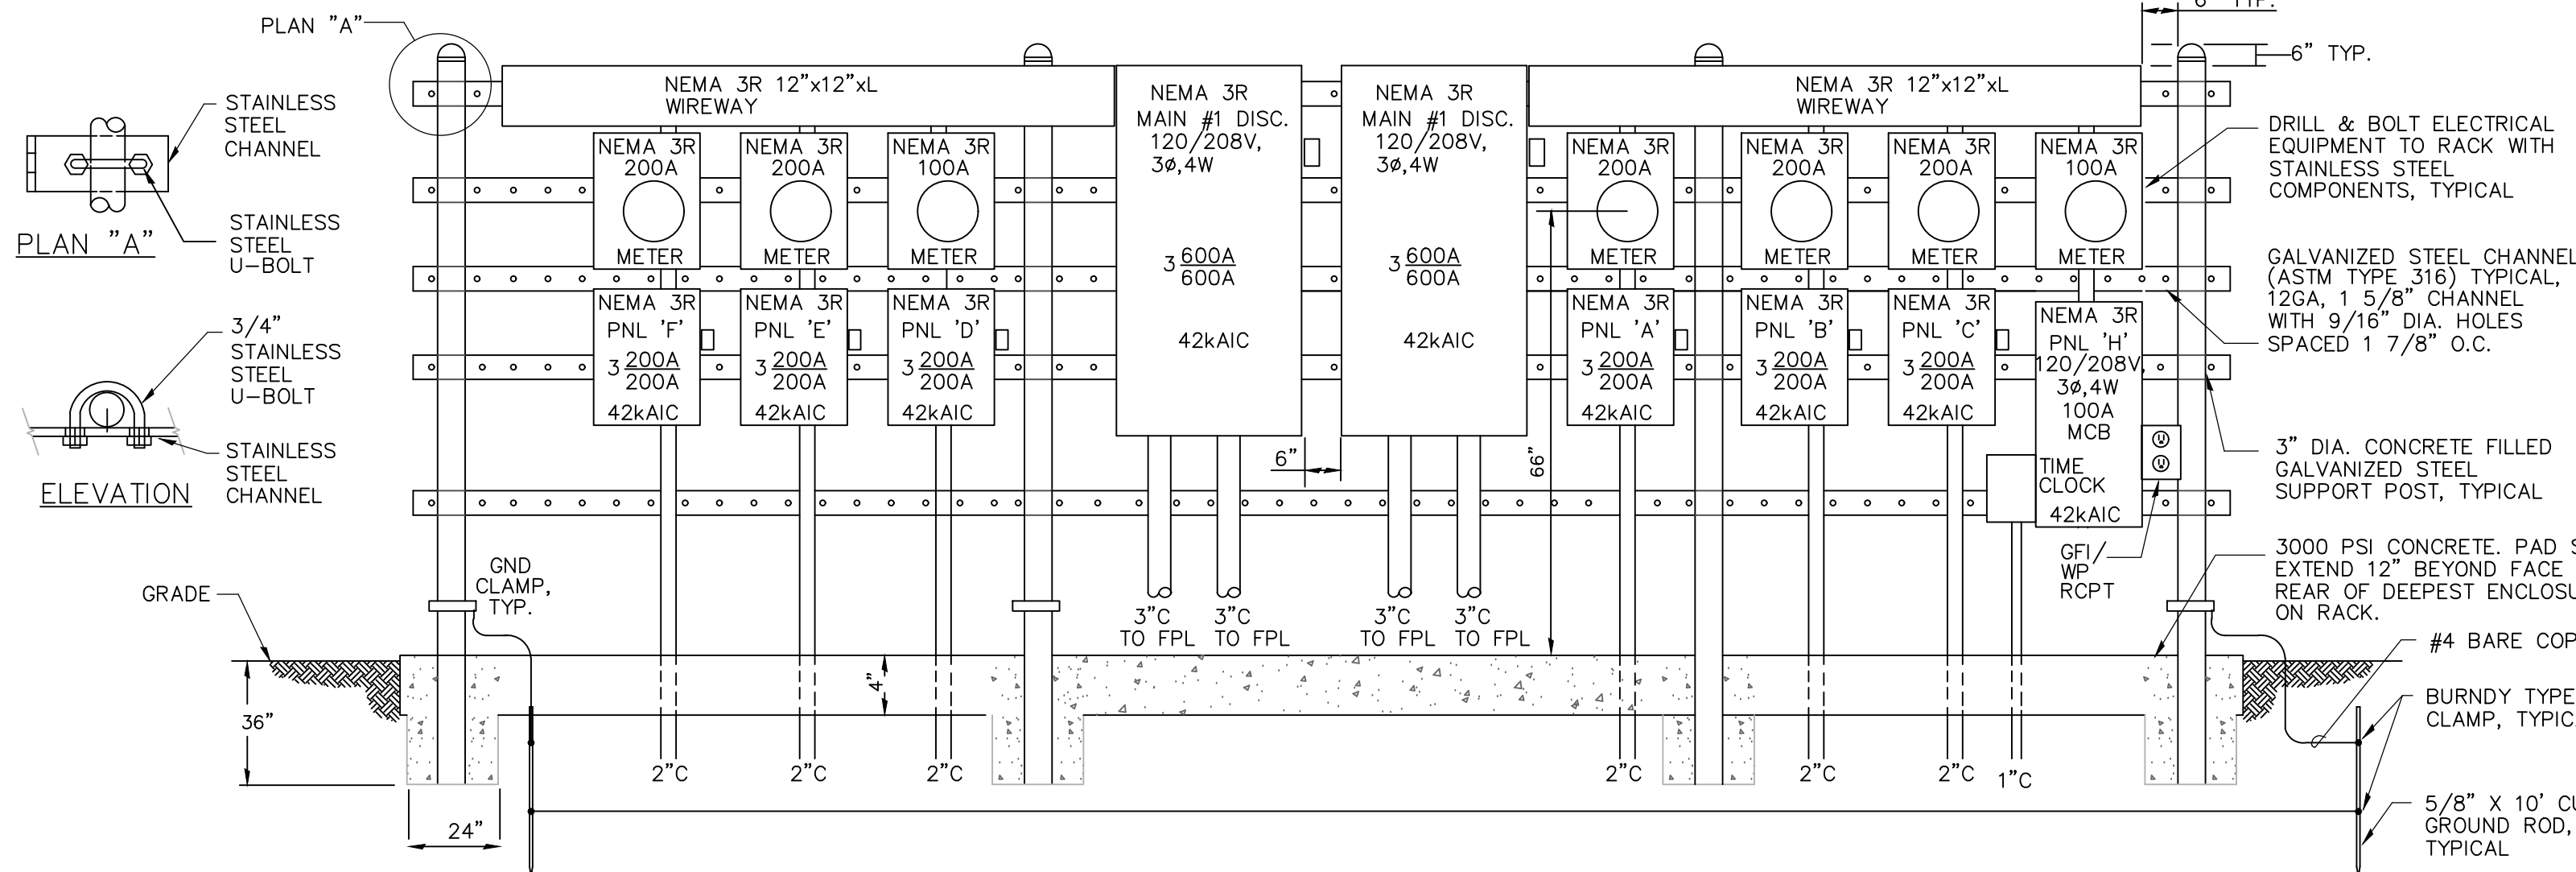

## 6 SERVICE RACK DETAIL

SCALE: NONE

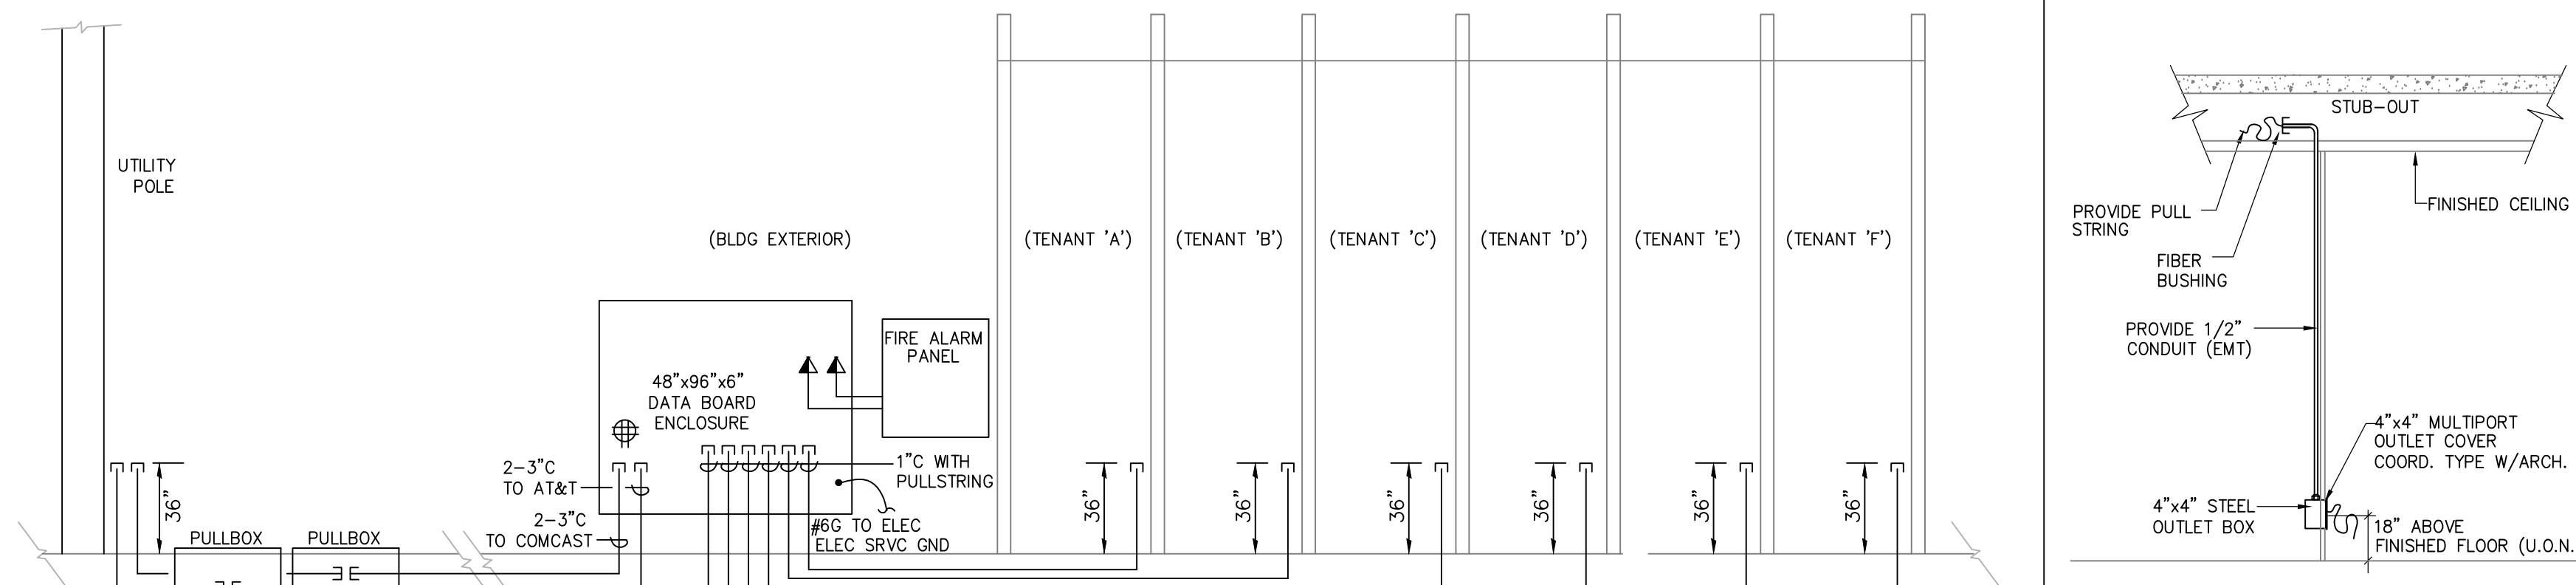


**4** DATA RISER  
SCALE: NONE

| LOAD CALC - SRVC #1:       |            | LOAD CALC - SRVC #2:       |            | LOAD CALC - TYPICAL BAY:         |           |
|----------------------------|------------|----------------------------|------------|----------------------------------|-----------|
| LTG @ 125% (6.5 x 1.25)    | = 8.1kVA   | LTG @ 125% (6.5 x 1.25)    | = 8.1kVA   | LTG @ 125% (2.0 x 1.25)          | = 2.5kVA  |
| HVAC @ 100% (15.0 x 1.0)   | = 15.0kVA  | HVAC @ 100% (15.0 x 1.0)   | = 15.0kVA  | FUTURE HVAC @ 100% (5.0 x 1.0)   | = 5.0kVA  |
| EQUIP @ 100% (165.5 x 1.0) | = 165.5kVA | EQUIP @ 100% (165.5 x 1.0) | = 165.5kVA | FUTURE EQUIP @ 100% (55.0 x 1.0) | = 55.0kVA |
| RCPTS: 1ST 10kVA @ 100%    | = 10.0kVA  | RCPTS: 1ST 10kVA @ 100%    | = 10.0kVA  | RCPTS: 1ST 10kVA @ 100%          | = 5.0kVA  |
| BALANCE @ 50% (5.0 x 0.5)  | = 2.5kVA   | BALANCE @ 50% (5.0 x 0.5)  | = 2.5kVA   | BALANCE @ 50% (0.0 x 0.5)        | = 0.0kVA  |
| TOTAL = 201.1kVA= 577.1A   |            | TOTAL = 201.1kVA= 577.1A   |            | TOTAL = 67.5kVA=187.0A           |           |



## 5 DATA DEVICE MOUNTING

### 3 GENERAL ELECTRICAL NOTES

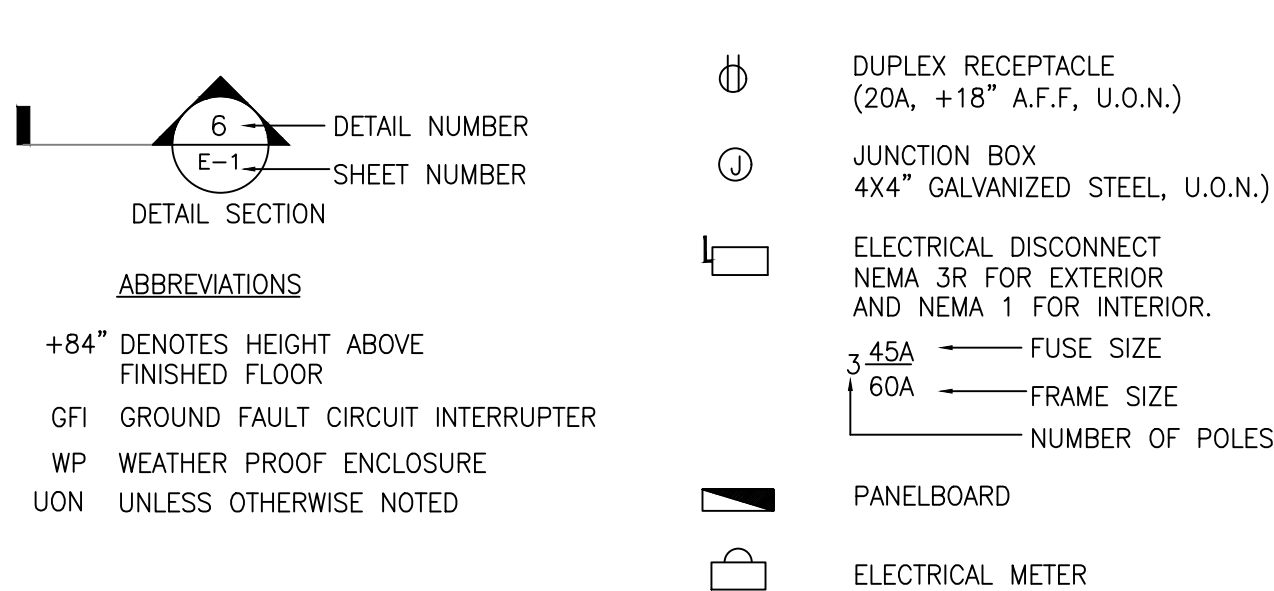

**1** | **LEGEND**  
SCALE: NONE

## 2 ELECTRICAL RISER

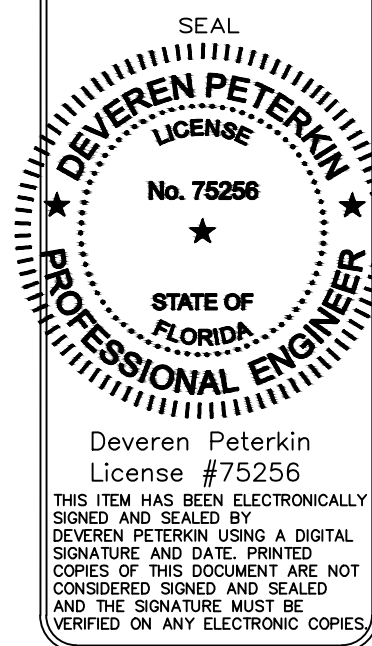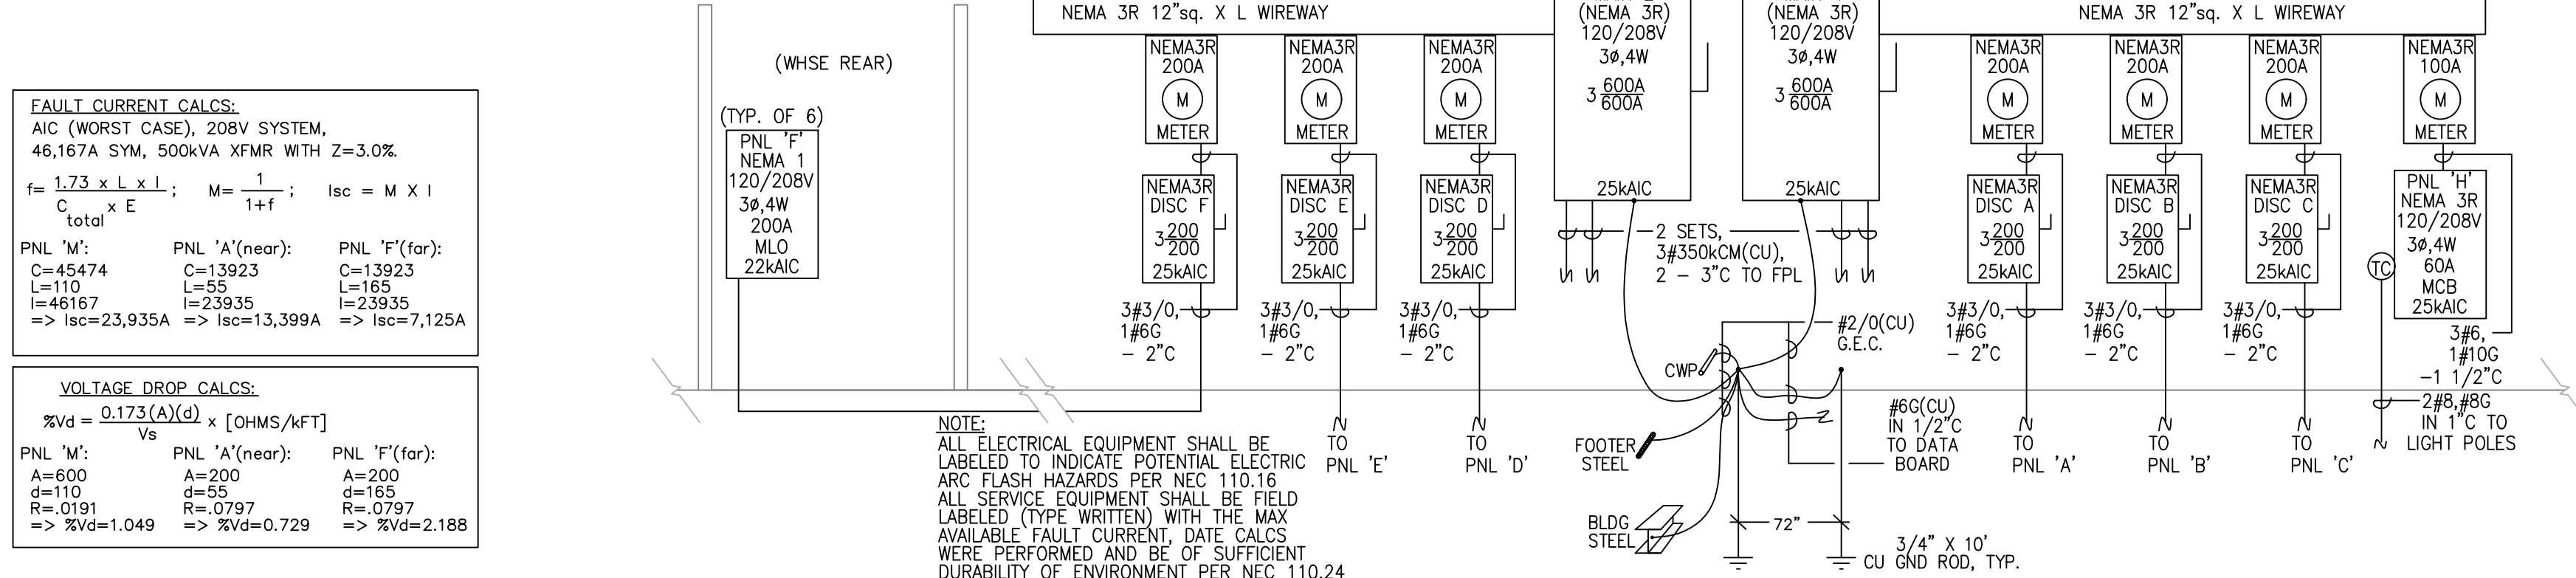[illegible]

MANGONIA PARK WAREHOUSE FOR:  
**1319 MANGONIA, LLC**  
1319 53rd STREET  
MANGONIA PARK, FL 33407

SHEET TITLE  
**ELECTRICAL  
NOTES,  
RISERS**

|             |
|-------------|
| DRAWN       |
| JP          |
| CHECKED     |
| DP          |
| DATE        |
| 07/24/24    |
| SCALE       |
| AS NOTED    |
| PROJECT NO. |
| 240509      |
| SHEET       |
| <b>E-3</b>  |
| OF 4 SHEETS |