

BUILDING INFORMATION:

BUILDING SPAN:85.0000

BUILDING LENGTH:190.0000

EAVE HEIGHT:22.00 /22.00

ROOF PITCH:1.0:12

BUILDING COLORS:

GABLE/EAVE:Burnished Slate

JAMB:Burnished Slate

BASE:Light Stone

CORNER:Burnished Slate

GUTTER:Burnished Slate

DOWNSPOUT:Burnished Slate

PRIMARY FRAMING:Red Oxide

SECONDARY FRAMING:Red Oxide

DESIGN LOADS:

DESIGN CODE/ED.:FBC 23 (8TH EDITION)

LIVE LOAD (ROOF)20.00P.S.F.

DEAD LOAD(ROOF)2.55P.S.F.

SNOW LOAD(ROOF)0.00P.S.F.

WIND LOAD170M.P.H.

EXPOSURE:C

SEISMIC ZONE:B

SEISMIC COEF.:0.100

COLLATERAL LOAD1.00P.S.F.

IMPORTANCE FACTORS:

WIND:lw=1.00

SEISMIC:le=1.00

SNOW:ls=1.00

SHEETING INFORMATION:

ROOF COVER:Super Span X

WALL COVER:Super Span X

LINER PANEL:

GABLE SOFFIT:

EAVE SOFFIT:

COLOR:Galvalume Plus

COLOR:Light Stone

COLOR:

COLOR:

COLOR:

GA:26

GA:26

GA:

GA:

GA:

- APPROVAL NOTES
- THE FOLLOWING CONDITIONS APPLY IN THE EVENT THAT THESE DRAWINGS ARE USED AS APPROVAL DRAWINGS:

1. IT IS IMPERATIVE THAT ANY CHANGES TO THESE DRAWINGS:

A. BE MADE IN CONTRASTING INK.

B. HAVE ALL INSTANCES OF CHANGE CLEARLY INDICATED.

C. BE LEGIBLE AND UNAMBIGUOUS.

2. DATED SIGNATURE IS REQUIRED ON ALL PAGES.

3. MANUFACTURER RESERVES THE RIGHT TO RE-SUBMIT DRAWINGS WITH EXTENSIVE OR COMPLEX CHANGES REQUIRED TO AVOID MISFABRICATION. THIS MAY IMPACT THE DELIVERY SCHEDULE.

4. APPROVAL OF THESE DRAWINGS INDICATES CONCLUSIVELY THAT MBMI METAL BUILDINGS HAS CORRECTLY INTERPRETED THE CONTRACT REQUIREMENTS, AND FURTHER CONSTITUTES AGREEMENT THAT THE BUILDING AS DRAWN, OR AS DRAWN WITH INDICATED CHANGES REPRESENTS THE TOTAL OF THE MATERIALS TO BE SUPPLIED BY MANUFACTURER.

5. ANY CHANGES NOTED ON THE DRAWINGS NOT IN CONFORMANCE WITH THE TERMS AND REQUIREMENTS OF THE CONTRACT BETWEEN MANUFACTURER AND ITS CUSTOMER ARE NOT BINDING ON MANUFACTURER UNLESS SUBSEQUENTLY SPECIFICALLY ACKNOWLEDGED AND AGREED TO IN WRITING BY CHANGE ORDER OR SEPARATE DOCUMENTATION. MANUFACTURER RECOGNIZES THAT RUBBER STAMPS ARE ROUTINELY USED FOR INDICATING APPROVAL, DISAPPROVAL, REJECTION, OR MERE REVIEW OF THE DRAWINGS SUBMITTED. HOWEVER, MANUFACTURER DOES NOT ACCEPT CHANGES OR ADDITIONS TO CONTRACTUAL TERMS AND CONDITIONS THAT MAY APPEAR WITH USE OF A STAMP OR SIMILAR INDICATION OF APPROVAL, DISAPPROVAL, ETC. SUCH LANGUAGE APPLIED TO MANUFACTURER'S DRAWINGS BY THE CUSTOMER, ARCHITECT, ENGINEER, OR ANY OTHER PARTY WILL BE CONSIDERED AS UNACCEPTABLE ALTERATIONS TO THESE DRAWING NOTES, AND WILL NOT ALTER THE CONTRACTUAL RIGHTS AND OBLIGATIONS EXISTING BETWEEN MANUFACTURER AND ITS CUSTOMER.

6. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO FABRICATION.

7. FAILURE TO RESPOND TO CLOUDED AREAS AND AREAS TO VERIFY MAY RESULT IN ADDITIONAL COST AND/OR SCHEDULE DELAYS FOR WHICH MBMI WILL NOT BE RESPONSIBLE.

8. ANY CHANGES MADE AFTER THE MBMI CUSTOMER HAS SIGNED AND RETURNED THE APPROVAL DRAWINGS AND THE PROJECT IS RELEASED FOR FABRICATION SHALL BE BILLED TO THE CUSTOMER INCLUDING MATERIAL, ENGINEERING, AND OTHER COST.
- WARNING: IN NO CASE SHOULD GALVALUME STEEL PANELS BE USED IN CONJUNCTION WITH LEAD OR COPPER. BOTH LEAD AND COPPER HAVE HARMFUL CORROSION EFFECTS ON THE ALUMINUM ZINC ALLOY COATING WHEN THEY ARE USED IN CONTACT WITH GALVALUME STEEL PANELS. EVEN RUN-OFF FROM COPPER FLASHING, WIRING, OR TUBING ONTO GALVALUME SHOULD BE AVOIDED.
- | ACCESSORIES | |
|--|-------------|
| DESCRIPTION | DESCRIPTION |
| 6 – 12’–0” x 14’–0” FRAMED OPENINGS | |
| | |
| 6 – 3070 FRAMED OPENINGS (FIELD LOCATED) | |
| | |
| | |
| | |
| | |
| | |
- MBMI

METAL BUILDINGS

DRAWING COVER SHEET FOR:

CUSTOMER:1319 MANGONIA LLC

ADDRESS:600 DIXIE HIGHWAY APT 727

LAKE WORTH, FL 33449
- PHONE:N

FAX:

PROJECT:GANESH PANDIT

LOCATION:MANGONIA PARK, FL 33407
- GENERAL NOTES

1. MATERIALS:

HOT ROLLED BAR

STRUCTURAL STEEL SHEET

STRUCTURAL STEEL PLATE

COLD FORMED SHAPES

ROOF AND WALL SHEETING

ROOF AND WALL SHEETING

BOLTS

MBMI METAL BUILDINGS RESERVES THE RIGHT TO SUBSTITUTE THE ABOVE MATERIALS WITH EQUAL OR BETTER MATERIAL.

MINIMUM YIELD:

Fy = 50 ksi MIN.

Fy = 50 ksi MIN.

Fy = 50 ksi MIN.

Fy = 55 ksi MIN.

Fy = 80 ksi MIN. 26GA.

Fy = 50 ksi MIN. 24GA.

A307 AND A325

2. A325 BOLT TIGHTENING REQUIREMENTS

ALL HIGH STRENGTH BOLTS ARE A325 UNLESS NOTED OTHERWISE. HIGH STRENGTH BOLTS SHALL BE TIGHTENED BY THE "TURN OF THE NUT" METHOD IN ACCORDANCE WITH THE LATEST EDITION AISC "SPECIFICATION FOR STRUCTURAL JOINTS USING ASTM A325 OR A490 BOLTS". A325 BOLTS SHALL BE INSTALLED WITHOUT WASHERS WHEN TIGHTENED BY THE "TURN OF THE NUT" METHOD. ALL BOLTED CONNECTIONS, FOR SHEAR / BEARING CONNECTION TYPE WITH BOLT THREADS EXCLUDED FROM THE SHEAR PLANE SHALL BE SNUG TIGHT ONLY.

3. ALL STRUCTURAL STEEL TO RECEIVE A RUST INHIBITIVE PRIMER. THIS PAINT IS NOT INTENDED FOR LONG TERM EXPOSURE TO THE ELEMENTS.

4. PRE-FORMED CLOSURE STRIPS ARE PROVIDED AT THE EAVE BENEATH THE ROOF SHEETS AND AT THE ENDWALLS BETWEEN THE RAKE TRIM AND THE ENDWALL SHEETS.

5. BUILDING DESIGN AS PER METAL BUILDING SYSTEMS MANUAL 2019.

6. WALL AND LINER PANELS ARE AN INTEGRAL PART OF THE STRUCTURAL SYSTEM. UNAUTHORIZED REMOVAL OF PANELS OR CUTTING PANELS FOR FRAMED OPENINGS NOT SHOWN IS PROHIBITED.

7. OIL-CANNING, A PERCEIVED WAVINESS INHERENT TO LIGHT GAUGE METAL, MAY EXIST. THIS CONDITION DOES NOT AFFECT THE STRUCTURAL INTEGRITY OR THE FINISH, AND THEREFORE IS NOT A CAUSE FOR REJECTION.

8. ANY TYPE OF SUSPENDED OR LOAD INDUCING SYSTEM(S) IS PROHIBITED IF ZERO COLLATERAL LOAD IS DESIGNATED ON THE CONTRACT. THIS WOULD INCLUDE LIGHTS, DUCT WORK, PIPING, AND INSULATION TYPES OTHER THAN 3" STANDARD DUTY FIBERGLASS BLANKET INSULATION, ECT.

9. LIGHT TRANSMITTING PANELS ARE NOT DESIGNED OR INTENDED TO BEAR THE WEIGHT OF ANY PERSON WALKING. STEPPING, STANDING OR RESTING ON THEM.

10. ANCHOR BOLTS – PER MBMA GUIDLINES, MBMI DESIGNS THE DIAMETER, PLACEMENT PATTERN, AND PROJECTION OF THE ANCHOR BOLTS ONLY. FOUNDATION DESIGN CONSIDERATIONS, INCLUDING BOLT EMBEDMENT LENGTH AND MINIMUM EDGE DISTANCE, ARE DETERMINED BY AND ARE THE RESPONSIBILITY OF THE FOUNDATION ENGINEER OR OTHERS, NOT MBMI

11. ERECTION DRAWINGS ARE NOT TO SCALE UNLESS NOTED.

ERECTOR NOTE

ONLY USE DRAWINGS ISSUED

"FOR CONSTRUCTION" TO ERECT BUILDING

DRAWING STATUS		REVISIONS			
☐ FOR APPROVAL: THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL, AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT DOCUMENTS. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.	NO.	DATE	DESCRIPTION	DET	CHK
	A	6/ 4/24	FOR APPROVAL	CER	CER
	O	7/23/24	FOR PERMIT	KR	CER
☒ FOR PERMIT: THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL IN THAT, AS A MINIMUM, PIECE MARKINGS ARE NOT IDENTIFIED. ONLY DRAWINGS ISSUED " FOR CONSTRUCTION " CAN BE CONSIDERED AS COMPLETE.					
☐ FOR CONSTRUCTION: FINAL DRAWINGS.					

BUILDER / CONTRACTOR RESPONSIBILITIES

1. IT IS THE RESPONSIBILITY OF THE BUILDER/CONTRACTOR TO INSURE THAT ALL PROJECT PLANS AND SPECIFICATIONS COMPLY WITH THE APPLICABLE REQUIREMENTS OF ANY GOVERNING BUILDING AUTHORITIES. THE SUPPLYING OF SEALED ENGINEERING DATA AND DRAWINGS FOR THE METAL BUILDING SYSTEM DOES NOT IMPLY OR CONSTITUTE AN AGREEMENT THAT MBMI METAL BUILDINGS OR ITS DESIGN ENGINEER IS ACTING AS THE ENGINEER OF RECORD OR DESIGN PROFESSIONAL FOR A CONSTRUCTION PROJECT.

2. THE CONTRACTOR MUST SECURE ALL REQUIRED APPROVALS AND PERMITS FROM THE APPROPRIATE AGENCY AS REQUIRED.

3. APPROVAL OF MBMI METAL BUILDINGS DRAWINGS AND CALCULATIONS INDICATE THAT MBMI METAL BUILDINGS CORRECTLY INTERPRETED AND APPLIED THE REQUIREMENTS OF THE CONTRACT DRAWINGS AND SPECIFICATIONS. (AISC CODE OF STANDARD PRACTICES, 15TH ED.)

4. WHERE DISCREPANCIES EXIST BETWEEN MBMI METAL BUILDINGS STRUCTURAL STEEL PLANS AND THE PLANS FOR OTHER TRADES, THE STRUCTURAL STEEL PLANS SHALL GOVERN. (AISC CODE OF STANDARD PRACTICE 15TH ED.)

5. DESIGN CONSIDERATIONS OF ANY MATERIALS IN THE STRUCTURE WHICH ARE NOT FURNISHED BY MBMI METAL BUILDINGS ARE THE RESPONSIBILITY OF THE CONTRACTORS AND ENGINEERS OTHER THAN MBMI METAL BUILDINGS ENGINEERS UNLESS SPECIFICALLY INDICATED.

6. THE CONTRACTOR IS RESPONSIBLE FOR ALL ERECTION OF STEEL AND ASSOCIATED WORK IN COMPLIANCE WITH MBMI METAL BUILDINGS "FOR CONSTRUCTION" DRAWINGS.

7. ALL BRACING AS SHOWN AND PROVIDED BY MBMI METAL BUILDINGS FOR THIS BUILDING IS REQUIRED AND SHALL BE INSTALLED BY THE ERECTOR AS A PERMANENT PART OF THE STRUCTURE.

8. TEMPORARY SUPPORTS, SUCH AS TEMPORARY GUYS, BRACES, FALSE WORK, CRIBBING OR OTHER ELEMENTS REQUIRED FOR THE ERECTION OPERATION WILL BE DETERMINED AND FURNISHED AND INSTALLED BY THE ERECTOR. THESE TEMPORARY SUPPORTS WILL SECURE THE STEEL FRAMING, OR ANY PARTLY ASSEMBLED STEEL FRAMING, AGAINST LOADS COMPARABLE IN INTENSITY TO THOSE FOR WHICH THE STRUCTURE WAS DESIGNED, RESULTING FROM WIND, SEISMIC FORCES AND ERECTION OPERATIONS, BUT NOT THE LOADS RESULTING FROM THE PERFORMANCE OF WORK BY OR THE ACTS OF OTHERS, NOR SUCH UNPREDICTABLE LOADS AS THOSE DUE TO TORNADO, EXPLOSION OR COLLISION. (AISC CODE OF STANDARD PRACTICE, 15TH ED.)

9. MBMI METAL BUILDING STANDARD SPECIFICATIONS APPLY UNLESS STIPULATED OTHERWISE IN THE CONTRACT DOCUMENTS. MBMI DESIGN, FABRICATION, QUALITY CRITERIA, STANDARDS, PRACTICE, METHODS, AND TOLERANCES SHALL GOVERN THE WORK ANY OTHER INTERPRETATIONS TO THE CONTRARY NOTWITHSTANDING. IT IS UNDERSTOOD BY BOTH PARTIES THAT THE CUSTOMER IS RESPONSIBLE FOR CLARIFICATIONS OF INCLUSIONS OR EXCLUSIONS FROM THE ARCHITECTURAL PLANS.

10. ANCHOR BOLTS AND FOUNDATION BOLTS ARE DESIGNED, FURNISHED, AND SET BY THE CUSTOMER IN ACCORDANCE WITH AN APPROVED DRAWING. DIMENSIONAL ACCURACY SHALL SATISFY THE REQUIREMENTS OF SECTION 7.5.1 OF "CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES" IN THE AISC MANUAL.

11. MBMI DOES NOT INVESTIGATE THE INFLUENCE OF THE METAL BUILDING SYSTEM ON EXISTING BUILDINGS OR STRUCTURES. THE END CUSTOMER ASSURES THAT SUCH BUILDINGS AND STRUCTURES ARE ADEQUATE TO RESIST SNOW DRIFTS, WIND LOADS, OR OTHER CONDITIONS AS RESULT OF THE PRESENCE OF THE METAL BUILDING SYSTEM.

12. NORMAL ERECTION OPERATIONS INCLUDE THE CORRECTION OF MINOR MISFITS BY MODERATE AMOUNTS OF REAMING, CHIPPING, OR CUTTING AND THE DRAWING OF ELEMENTS INTO LINE THROUGH THE USE OF DRIFT PINS. ERRORS WHICH REQUIRE MAJOR CHANGES IN THE MEMBER CONFIGURATION ARE TO BE REPORTED IMMEDIATELY TO MBMI BY THE CUSTOMER TO ENABLE WHOEVER IS RESPONSIBLE TO EITHER CORRECT THE ERROR OR APPROVE THE MOST EFFICIENT AND ECONOMIC METHOD OF CORRECTION TO BE USED ("CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES" IN THE AISC MANUAL; SECTION 7.12).

13. ALL DOCUMENTATION AND RECORDS SHALL BE THE RESPONSIBILITY OF THE CUSTOMER.

14. ANY CLAIMS OR SHORTAGES BY THE BUYER MUST BE MADE TO MBMI WITHIN SEVEN (7) WORKING DAYS AFTER DELIVERY, OR SUCH CLAIMS WILL BE CONSIDERED TO HAVE BEEN WAIVED BY THE CUSTOMER AND DISALLOWED.

15. CLAIMS FOR CORRECTION OF ALLEGED MISFITS WILL BE DISALLOWED UNLESS MBMI SHALL HAVE RECEIVED PRIOR NOTICE THEREOF AND ALLOWED REASONABLE INSPECTION OF SUCH MISFITS. ORDINARY INACCURACIES OF SHOP WORK SHALL NOT BE CONSTRUED AS MISFITS. NO PART OF THE BUILDING MAY BE RETURNED OR CHARGES ASSESSED FOR ALLEGED MISFITS WITHOUT PRIOR APPROVAL FROM MBMI.

16. NEITHER MBMI NOR THE CUSTOMER WILL CUT, DRILL, OR OTHERWISE ALTER THEIR WORK, OR WORK OF OTHER TRADES TO ACCOMMODATE OTHER TRADES UNLESS SUCH WORK IS CLEARLY SPECIFIED IN THE CONTRACT DOCUMENTS. WHENEVER SUCH WORK IS SPECIFIED THE CUSTOMER IS RESPONSIBLE FOR FURNISHING COMPLETE INFORMATION AS TO MATERIALS, SIZE, LOCATION AND NUMBER OF ALTERATIONS PRIOR TO THE PREPARATION OF SHOP DRAWINGS.

MBMI

METAL BUILDINGS

The choice in pre-engineered metal buildings

4723 W ATLANTIC AVE, STE A20


DELRAY BEACH, FL 33445

(800) 293-2097

www.mbmi.biz

JOB NO.

29187

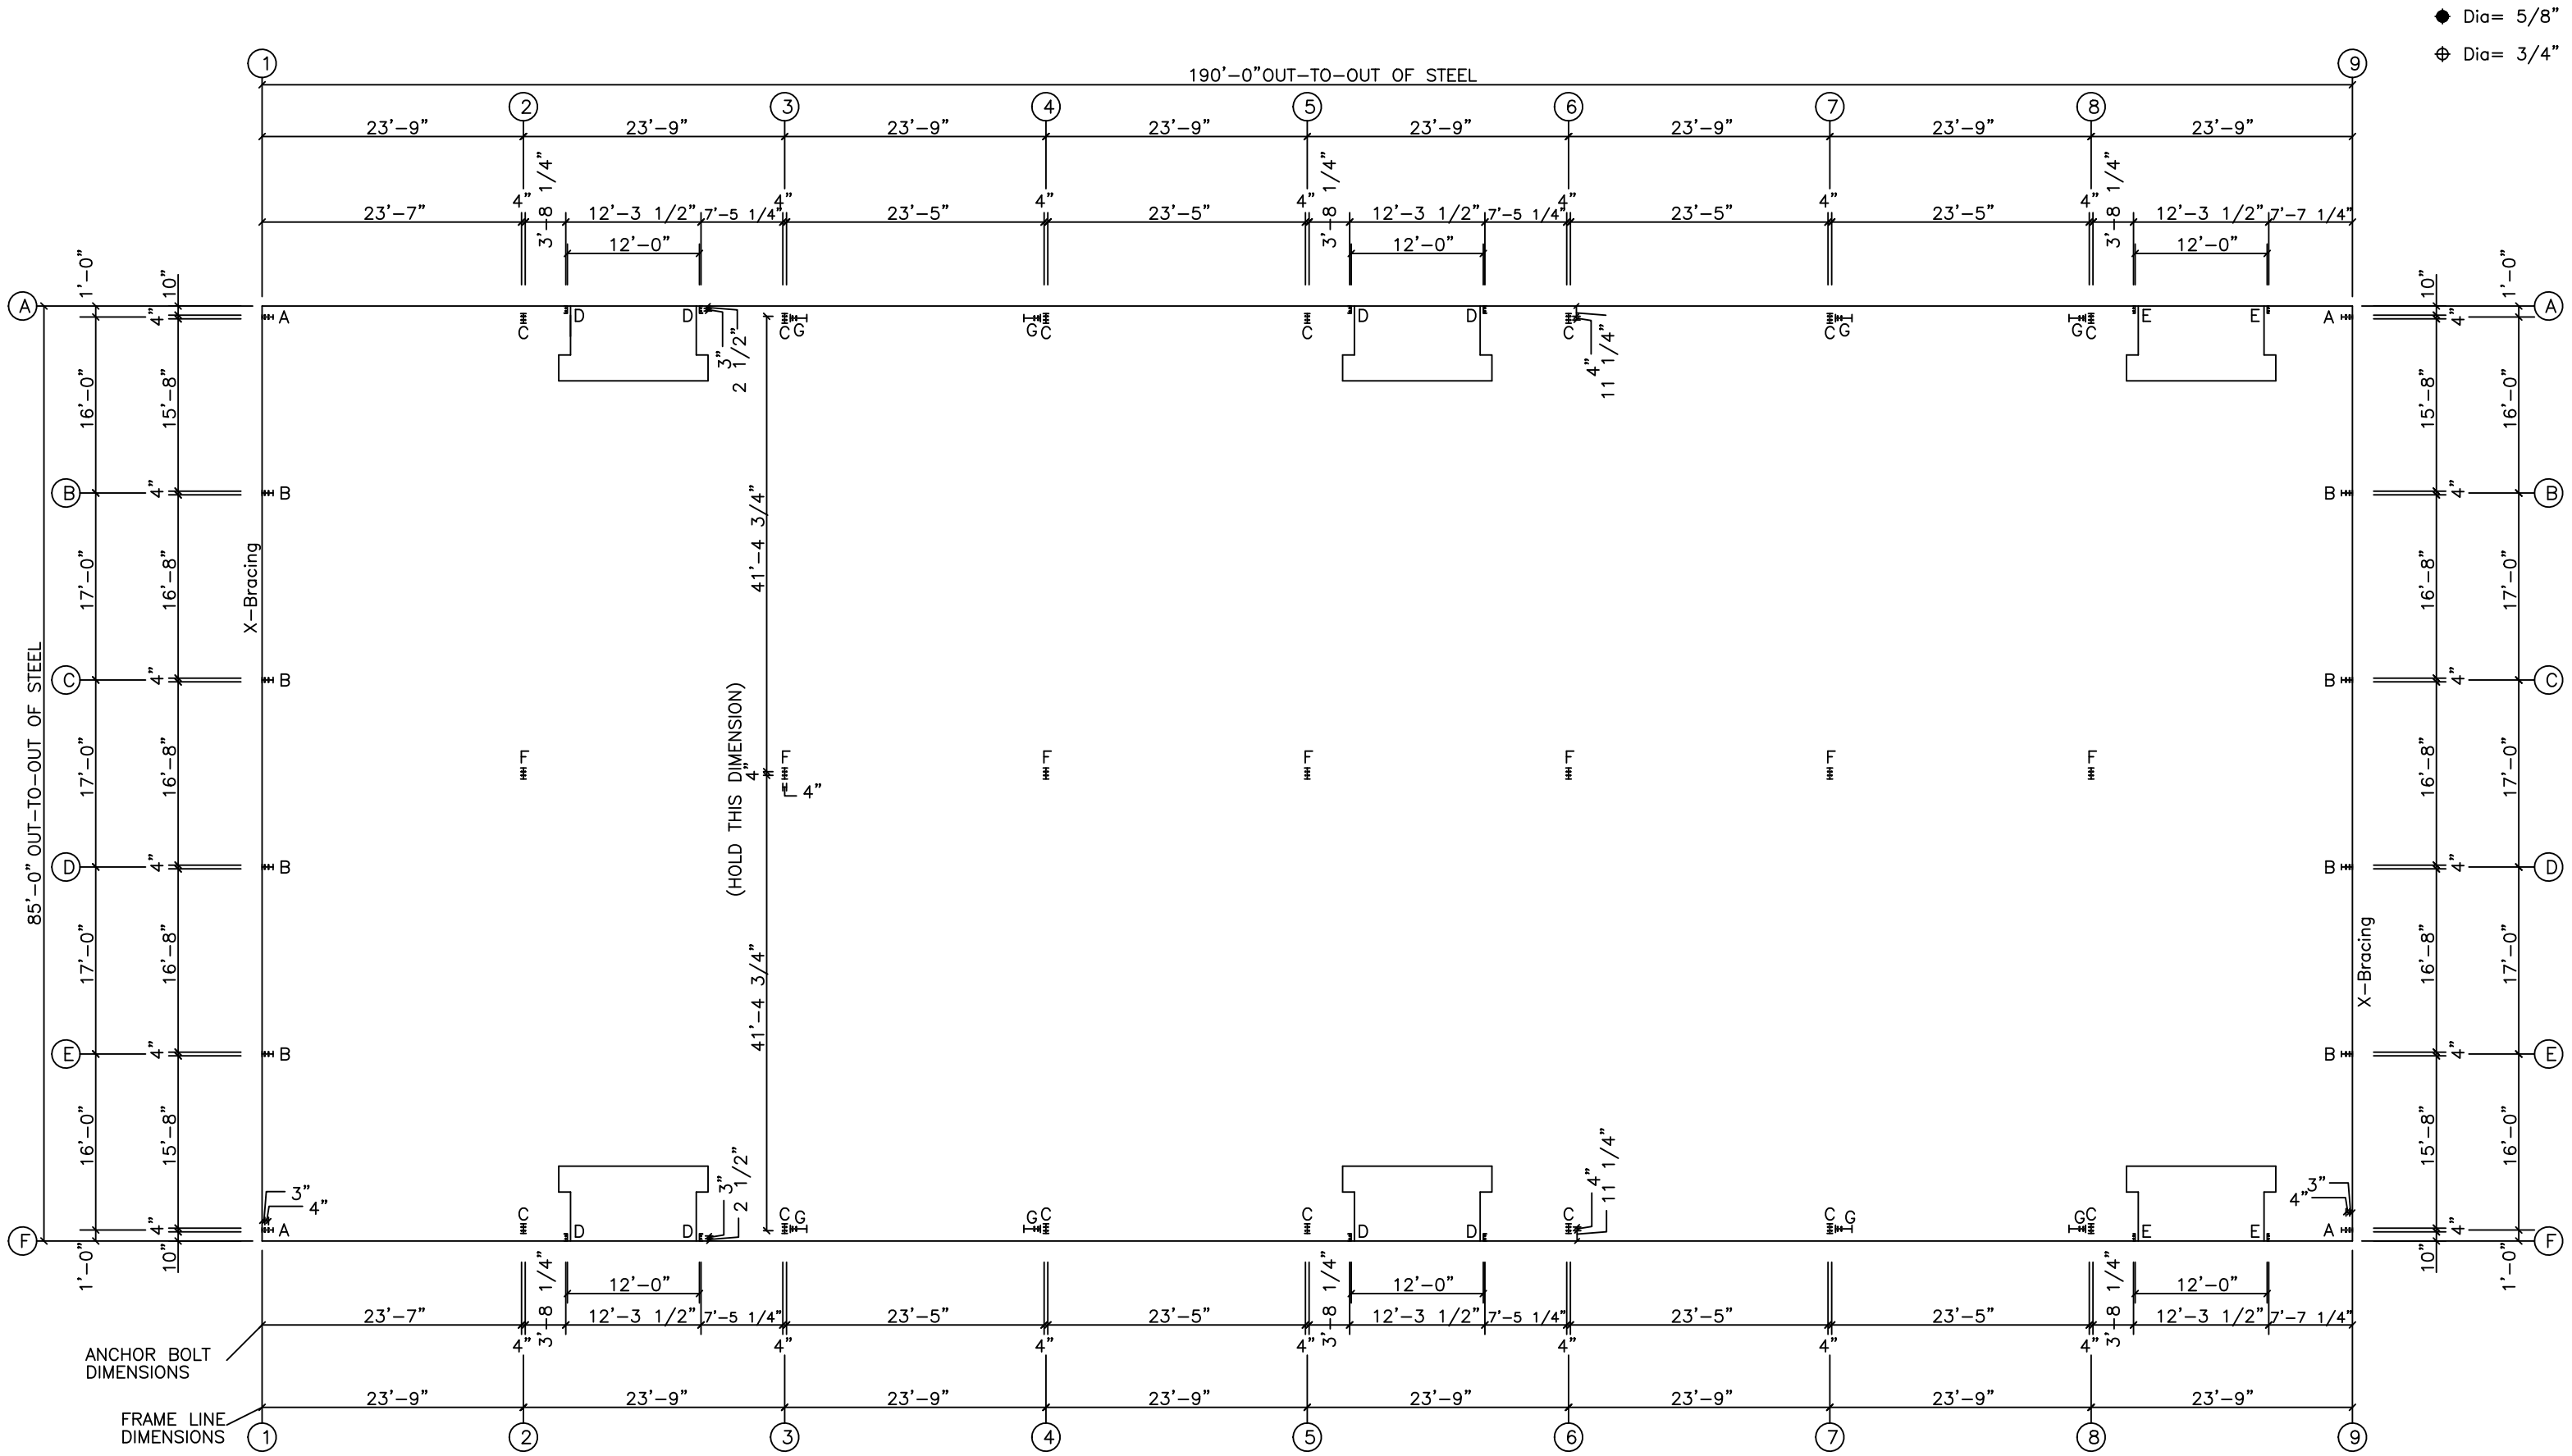

ANCHOR BOLT PLAN
NOTE: All Base Plates @ 100'-0" (U.N.)

DRAWING STATUS		REVISIONS			
☐ FOR APPROVAL: THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL, AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT DOCUMENTS. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE. ☒ FOR PERMIT: THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL IN THAT, AS A MINIMUM, PIECE MARKINGS ARE NOT IDENTIFIED. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE. ☐ FOR CONSTRUCTION: FINAL DRAWINGS.	NO.	DATE	DESCRIPTION	DET	CHK
	A	6/ 4/24	FOR APPROVAL	CER	CER
	O	7/23/24	FOR PERMIT	KR	CER

MBMI
METAL BUILDINGS

4723 W ATLANTIC AVE.
SUITE A20
DELRAY BEACH, FL 33445
TEL.: 800-293-2097

GANESH PANDIT








1319 MANGONIA LLC
1319 53RD STREET
MANGONIA PARK, FL 33407

DATE 7/23/24

ANCHOR BOLT PLAN

1 OF 11

JOB NO 29187

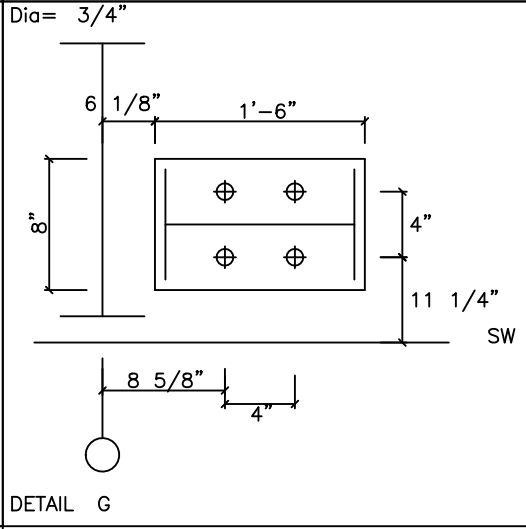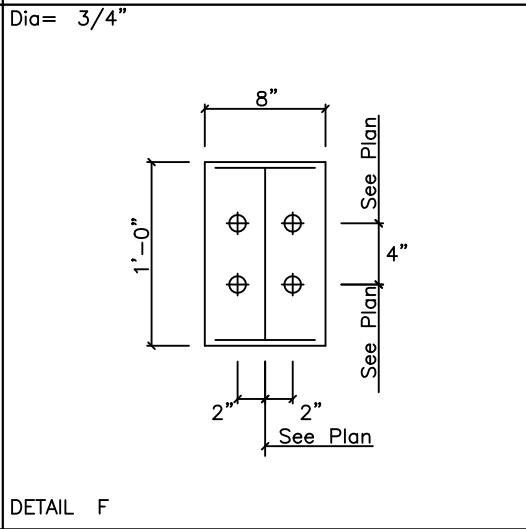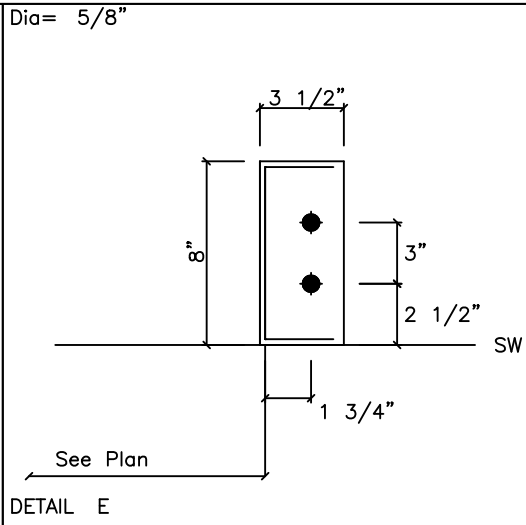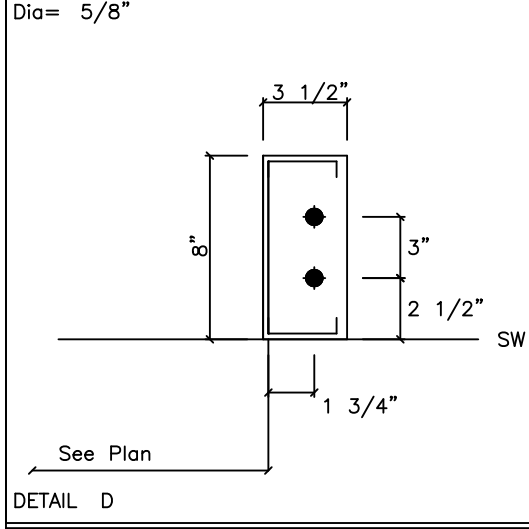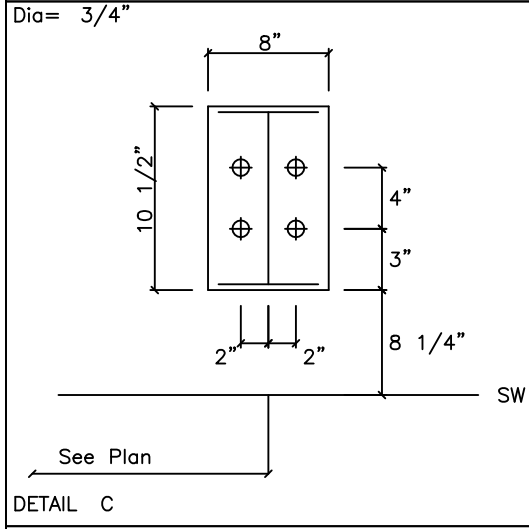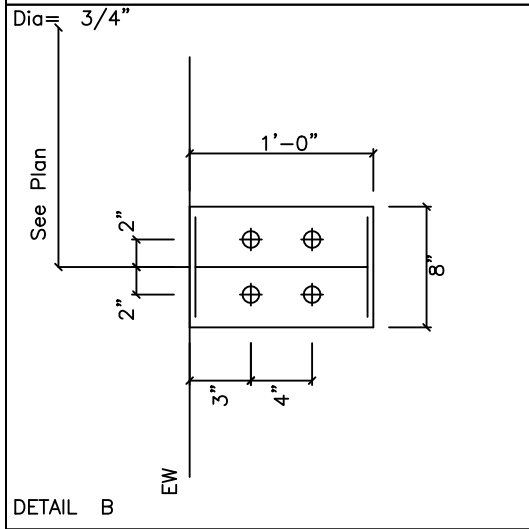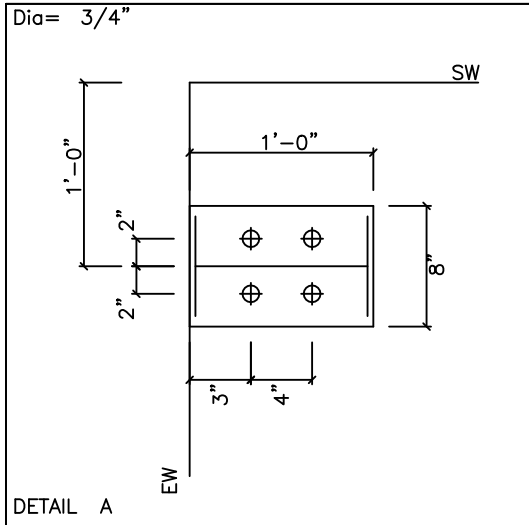

ADDITIONAL NOTES ON WIND LOADS FOR FLORIDA BUILDING CODE

COMPONENT & CLADDING WIND PRESSURES (COMBINED)			
PRESSURE	SUCTION	SUCTION_R	LOCATION
50.3	-55.4		COLUMN
50.3	-55.4		GIRT/HEADER
62.2	-67.4		WALL PANEL
50.3	-55.4		JAMB
21.8	-53.5		PURLIN
27.6	-62.2		ROOF PANEL
33.4	-6.3	-39.7	ROOF BRACING

INTERNAL PRESSURE COEFFICIENTS PER TABLE 26.13-1, ASCE 7-22		PRESSURE COEFFICIENTS	
BUILDING TYPE			
OPEN		0.0	
PARTIALLY ENCLOSED		+0.55	-0.55
ALL OTHER ENCLOSED BUILDINGS		+0.18	-0.18

THE LOW RISE BUILDING WIND PRESSURE FOR THE MAIN WIND FORCE RESISTING SYSTEM IS GIVEN IN CHAPTER 28 OF ASCE 7-22

FLORIDA PRODUCT APPROVAL NUMBERS

PANEL NAME	GA.	FL #
SUPER SPAN X WALL PANEL	24	17702.1
7.2 WALL PANEL	26	17702.2
LOW SPAN X WALL PANEL	26	17702.3
SUPER SPAN X WALL PANEL	26	17702.4
LOW RIB X ROOF PANEL	26	17700.1
SUPER SEAM II ROOF PANEL	24	17700.3
SUPER SEAM PLUS ROOF PANEL	24	17700.4
SUPER SPAN X ROOF PANEL	26	17700.5
SUPER SPAN X ROOF PANEL	24	17700.6
WEATHER LOK ROOF PANEL	24	17704.3
SUPER SPANX DADE COUNTY PANEL	24	NOA#16-0211.04

FLORIDA 3070 DOOR (NON MIAMI DADE/BROWARD COUNTY)	17900.1
---	---------

NOTES FOR REACTIONS

- All loading conditions are examined and only maximum/minimum H or V and the corresponding H or V are reported.
- Positive reactions are as shown in the sketch. Foundation loads are in opposite directions.
- Bracing reactions are in the plane of the brace with the H pointing away from the braced bay. The vertical reaction is downward.
- Building reactions are based on the following building data:

Width	(ft)	=	85.0
Length	(ft)	=	190.0
Eave Height	(ft)	=	22.0
Roof Slope	(rise/12)	=	1.00/ 1.00
Roof Dead Load	(psf)	=	2.6
Wall Dead Load			
Left Endwall	(psf)	=	3.0
Right Endwall	(psf)	=	3.0
Front Sidewall	(psf)	=	3.0
Back Sidewall	(psf)	=	3.0
Roof Live Load	(psf)	=	20.0
Frame Live Load	(psf)	=	12.0
Collateral Load	(psf)	=	1.0
Wind Speed	(mph)	=	170.0
Wind Code		=	FBC 23 (8TH EDITION)
Exposure		=	C
Closure		=	Enclosed
Internal Wind Coeff		=	-0.18, +0.18
Risk Category		=	-
Importance - Wind		=	1.00
Importance - Seismic		=	1.00
Seismic Design Category		=	B
Seismic Coeff	(Sms)	=	0.10

ANCHOR BOLT SUMMARY

Qty	Locate	Dia (in)	Type	Proj (in)
24	Jamb	5/8"	F1554	2.50
48	Endwall	3/4"	F1554	3.00
84	Frame	3/4"	F1554	3.00
32	WindCol	3/4"	F1554	3.00

GENERAL NOTES

- Foundation design and construction are not the responsibility of the steel building manufacturer.
- The building reaction data reports the loads which this building places on the foundation.
- Anchor bolts shall be accurately set to a tolerance of +/- 1/8" in both elevation and location. Anchor bolts are to be type A36.
- Column base plates are designed not to exceed a bearing pressure of 1125 pounds per square inch.
- Reactions are based on ASD design procedure.
- Anchor bolts are not supplied by MBMI.


BUILDING BRACING REACTIONS

Wall		Col		± Reactions(k)				Panel Shear (lb/ft)		Note
Loc	Line	Line	Line	Wind	Seismic	Wind	Seismic	Wind	Seis	
L_EW	1	B,C		6.4	8.7	0.2	0.3			(a)
F_SW	F	3,4								(a)
R_EW	9	E,D		6.4	8.7	0.2	0.3			(a)
B_SW	A	7,8								(a)

(a)Wind bent in bay

Reactions for seismic represent shear force, Eh
Reaction values shown are unfactored

RIGID FRAME REACTIONS (k)

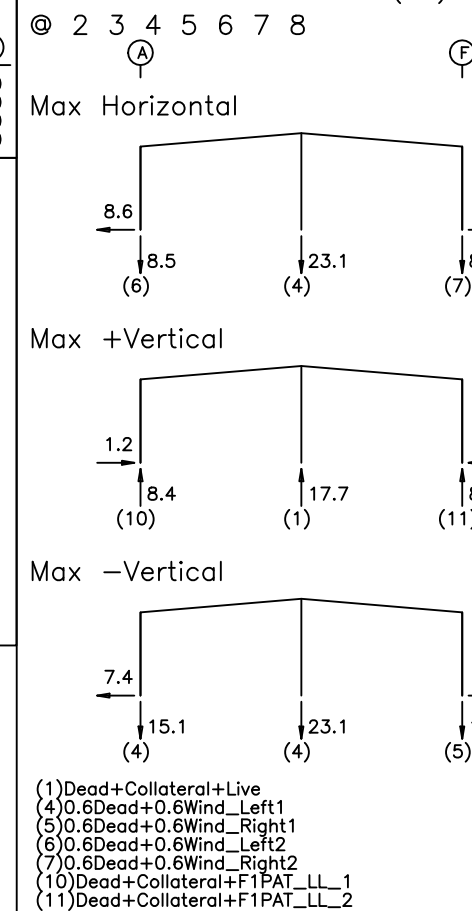

ENDWALL COLUMN REACTIONS(k)

Frame Line	Col Line	Max Horz	Max Vert	Max -Vert	Max Horz	Load Id
1	C	6.5	-9.9			(16)
1	B	6.9	4.5			(15)
1	B	-14.4	6.0			(13)

(13)0.6Dead+0.6Wind_Left1+0.6Wind_Suction
(15)Dead+Collateral+0.75Live+0.45Wind_Right2+0.45Wind_Suction
(16)0.6Dead+0.6Wind_Right1+0.6Wind_Suction

WIND BENT REACTIONS

Wall		Col		± Reactions				Bolt(in)		Base_Plate(in)		Thick
Loc	Line	Line	Line	Wind	Seismic	Wind	Seismic	Qty	Dia	Width	Length	
F_SW	F	3		5.5	10.3	0.3	0.6	4	0.750	8.000	18.000	0.375
F_SW	F	4		5.5	10.3	0.3	0.6	4	0.750	8.000	18.000	0.375
F_SW	F	7		5.5	10.3	0.3	0.6	4	0.750	8.000	18.000	0.375
F_SW	F	8		5.5	10.3	0.3	0.6	4	0.750	8.000	18.000	0.375
B_SW	A	8		5.5	10.3	0.3	0.6	4	0.750	8.000	18.000	0.375
B_SW	A	7		5.5	10.3	0.3	0.6	4	0.750	8.000	18.000	0.375
B_SW	A	4		5.5	10.3	0.3	0.6	4	0.750	8.000	18.000	0.375
B_SW	A	3		5.5	10.3	0.3	0.6	4	0.750	8.000	18.000	0.375

DRAWING STATUS		REVISIONS			
☐ FOR APPROVAL:		NO.	DATE	DESCRIPTION	DET/CER
THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL, AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT DOCUMENTS. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.		A	6/ 4/24	FOR APPROVAL	CER/CER
☒ FOR PERMIT:		O	7/23/24	FOR PERMIT	KR CER
THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL IN THAT, AS A MINIMUM, PIECE MARKINGS ARE NOT IDENTIFIED. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.					
☐ FOR CONSTRUCTION:					
FINAL DRAWINGS.					

MBMI
METAL BUILDINGS

4723 W ATLANTIC AVE.
SUITE A20
DELRAY BEACH, FL 33445
TEL.: 800-293-2097


GANESH PANDIT	
1319 MANGONIA LLC 1319 53RD STREET MANGONIA PARK, FL 33407	
DATE 7/23/24	DWG NO 2 OF 11
A. BOLT DETAILS/REACTIONS	JOB NO 29187

SPECIAL BOLTS					
ROOF PLAN					
○ ID	QUAN	TYPE	DIA	LENGTH	WASH
1	4	A307	1/2"	1 1/4"	0

TRIM TABLE		
ROOF PLAN		
◇ ID	MARK	DETAIL
1	SSRC	TRIM_54

CONNECTION PLATES	
ROOF PLAN	
□ ID	MARK/PART
1	AK200
2	CA005

MEMBER TABLE	
ROOF PLAN	
MARK	SIZE
RO-1	10M25C14
RO-2	10M25C14
P-1	10X25Z12
P-2	10X25Z12
P-3	10X25Z14
P-4	10X25Z14
P-5	10X25Z14
P-6	10X25Z12
P-7	10X25Z12
P-8	10X25Z16
E-1	10ES141
E-2	10ES141
E-3	10ES141
E-4	10ES141
E-5	10ES141
CB-4	0.63_ROD
CB-5	0.50_ROD
CB-6	0.50_ROD

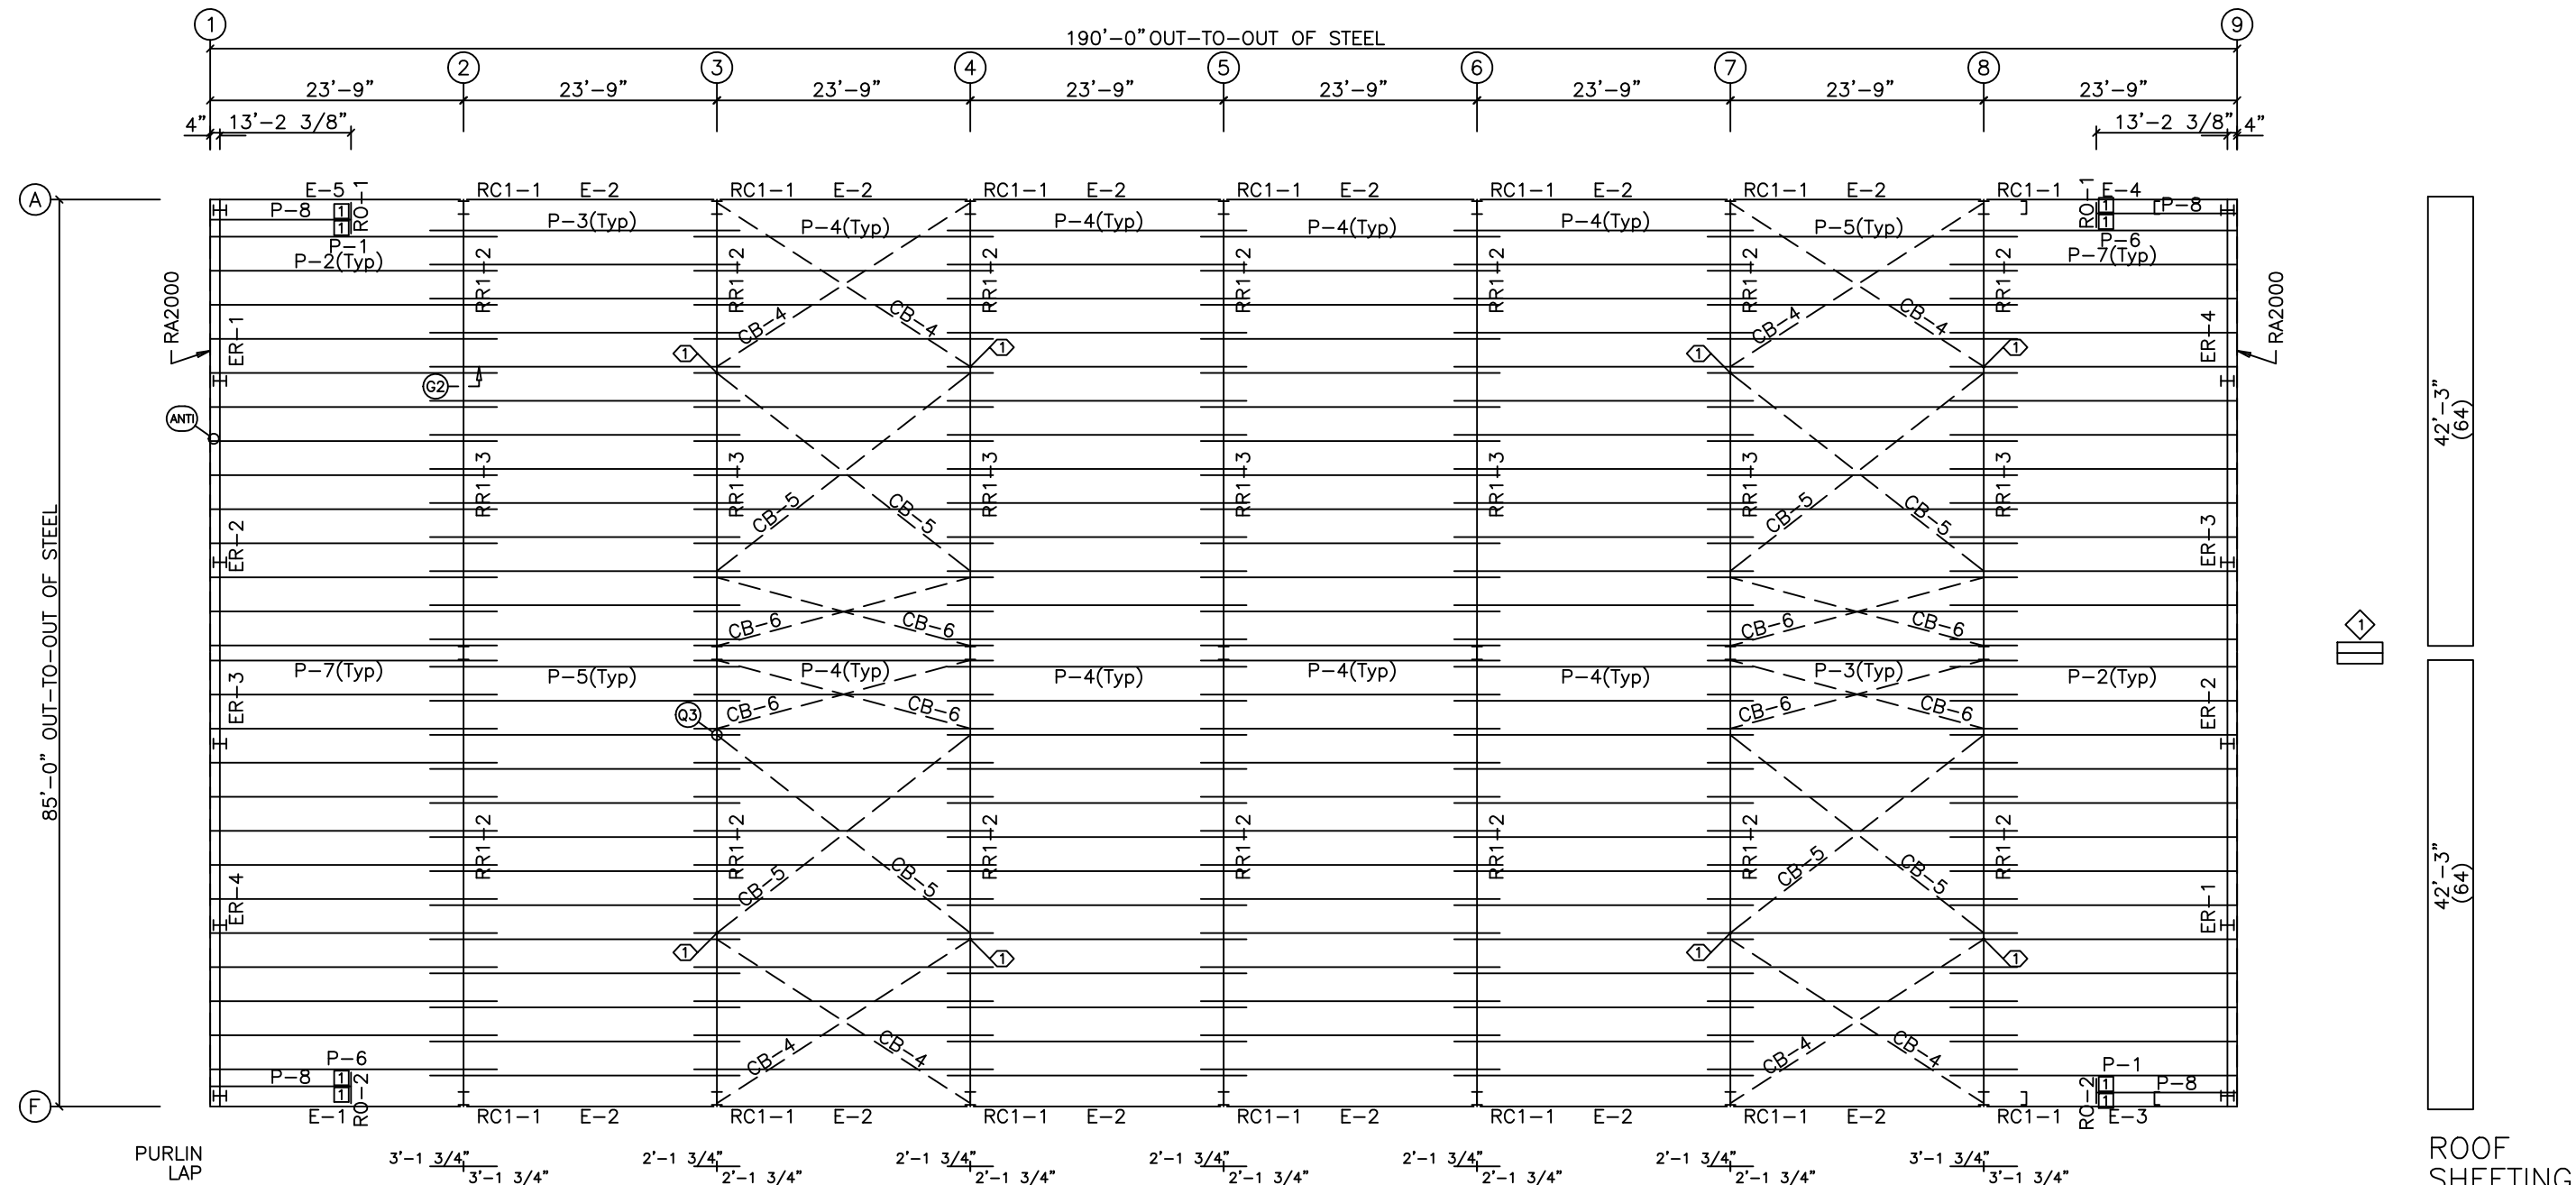

ROOF FRAMING PLAN

GENERAL NOTES:

- FOR STANDING SEAM ROOF SYSTEMS SEE STANDING SEAM MANUAL, FOR SCREW DOWN ROOF SYSTEMS SEE BELOW.
- MBMI HIGHLY RECOMMENDS INSTALLING A SNOW RETENTION SYSTEM (BY OTHERS) TO PROTECT THE GUTTER SYSTEM FROM DAMAGE IN HIGH SNOW LOAD AREAS.

DRAWING STATUS		REVISIONS		
☐ FOR APPROVAL:	THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL, AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT DOCUMENTS. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.	NO.	DATE	DESCRIPTION
☒ FOR PERMIT:	THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL IN THAT, AS A MINIMUM, PIECE MARKINGS ARE NOT IDENTIFIED. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.	A	6/ 4/24	FOR APPROVAL
☐ FOR CONSTRUCTION:	FINAL DRAWINGS.	O	7/23/24	FOR PERMIT

MBMI
METAL BUILDINGS

4723 W ATLANTIC AVE.
SUITE A20
DELRAY BEACH, FL 33445
TEL.: 800-293-2097

GANESH PANDIT	
1319 MANGONIA LLC 1319 53RD STREET MANGONIA PARK, FL 33407	
DATE 7/23/24	DWG NO 3 OF 11
ROOF FRAMING	JOB NO 29187


DOWNSPOUT LOCATIONS

BOLT TABLE				
LINE A				
LOCATION		QUAN	TYPE	DIA
WF-1 - WF-2		8	A325	3/4"
WF-1 - RC1-1		8	A325	5/8"
LENGTH				
2"				
1 3/4"				


TRIM TABLE		
LINE A		
ID	MARK	DETAIL
1	BT-101	
2	CT-102	TRIM_203
3	GU-12	TRIM_2
4	MT-116	
5	FL-22	TRIM_179
6	HT-101	TRIM_178

MEMBER TABLE		
LINE A		
MARK	SIZE	
WF-1	W18841	
WF-2	W16841	
DJ-1	8M35C14	
DJ-2	C8X11.5	
DJ-3	C8X11.5	
DH-1	8M25C14	
G-4	8X25Z12	
G-5	8X25Z14	
G-9	8X25Z14	
G-11	8X35Z14	
G-12	8X25Z12	
G-16	8X25Z16	
G-17	8X25Z16	
G-18	8X25Z16	
G-19	8X35Z14	
G-20	8X25Z12	
G-21	8X35Z14	
G-22	8X25Z12	
G-23	8X25Z14	
G-24	8X25Z14	


CLIP TABLE	
LINE A	
ID	MARK
1	AK508
2	SC-5

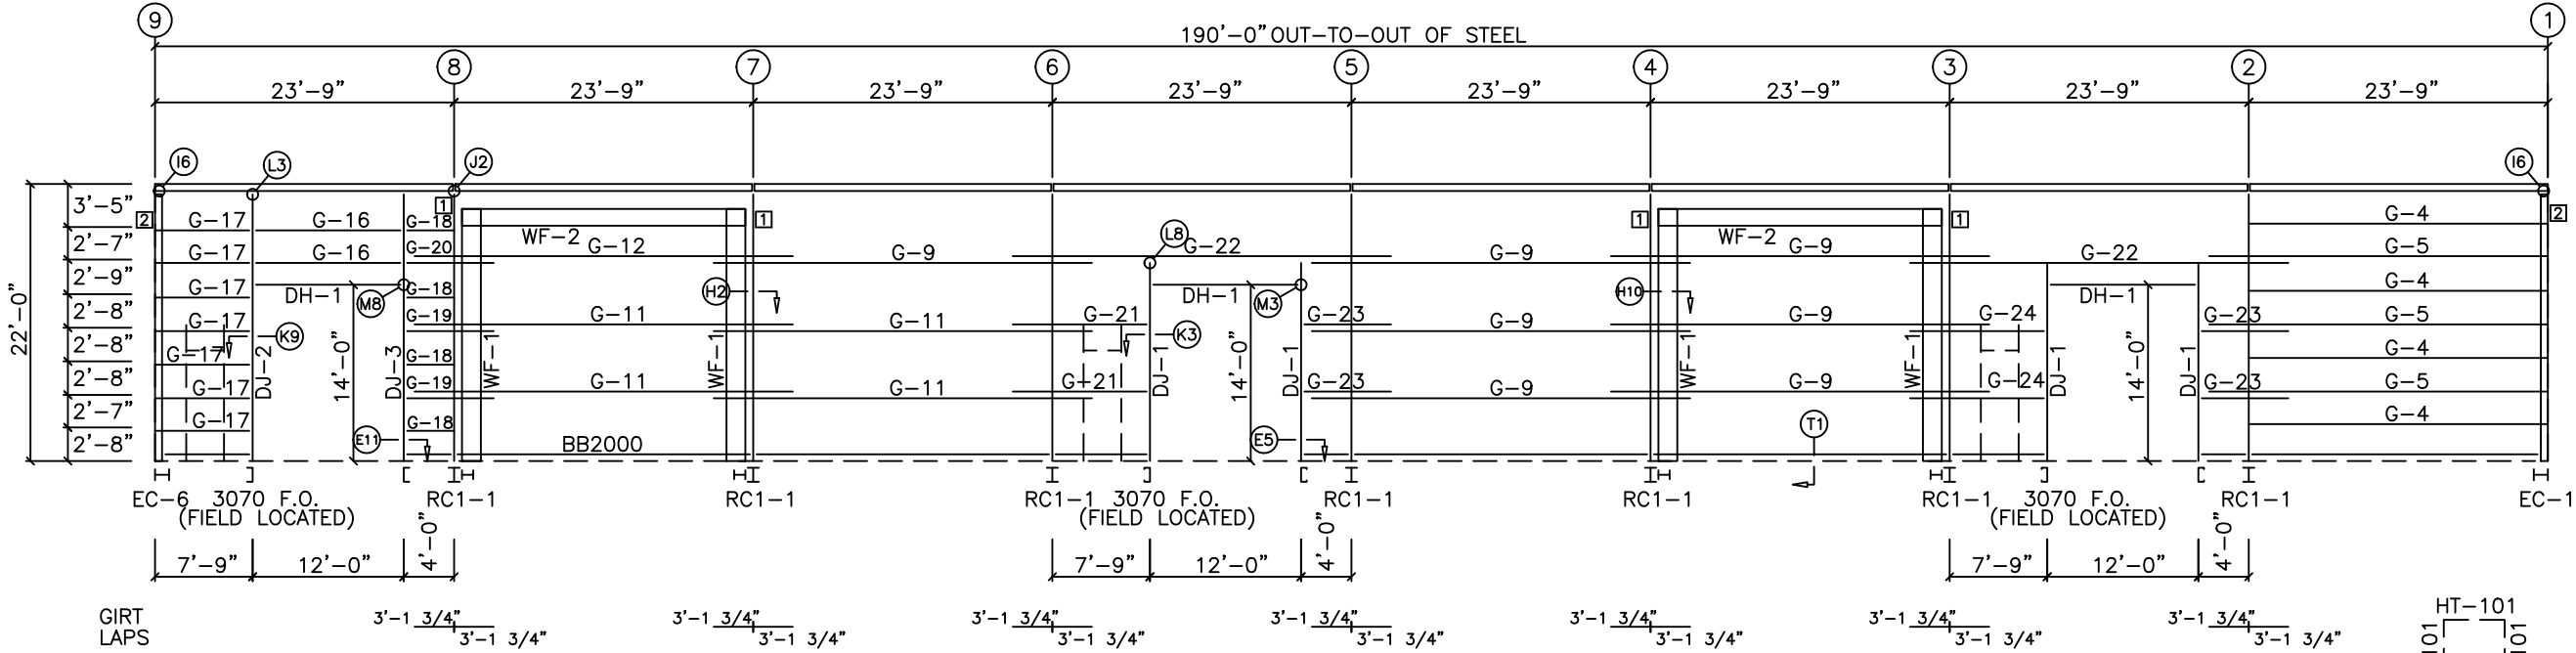

BACK SIDEWALL FRAMING: LINE A

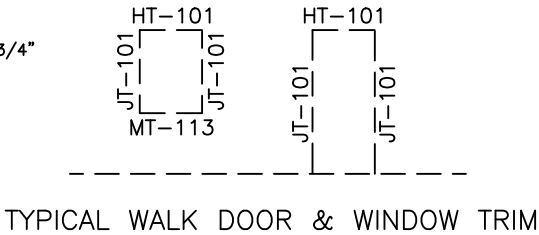

TYPICAL WALK DOOR & WINDOW TRIM

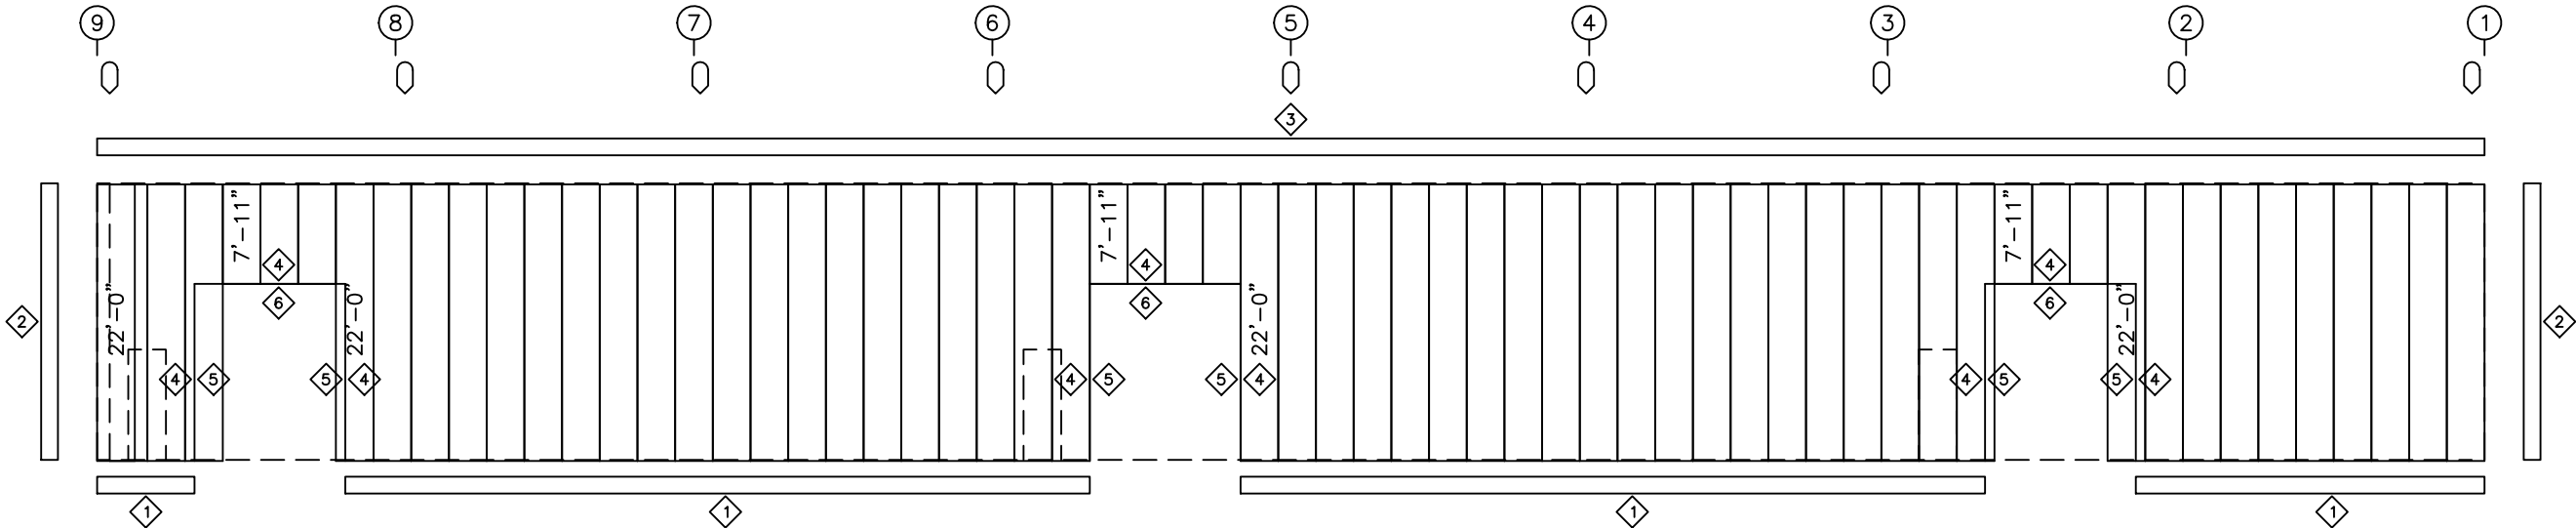

BACK SIDEWALL SHEETING & TRIM: LINE A

GENERAL NOTES:
1. FIELD SLOT FLUSH GIRTS FOR BRACING (IF REQUIRED).

DRAWING STATUS		REVISIONS		
☐ FOR APPROVAL: THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL, AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT DOCUMENTS. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.		NO.	DATE	DESCRIPTION
☒ FOR PERMIT: THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL IN THAT, AS A MINIMUM, PIECE MARKINGS ARE NOT IDENTIFIED. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.		A	6/ 4/24	FOR APPROVAL
☐ FOR CONSTRUCTION: FINAL DRAWINGS.		O	7/23/24	FOR PERMIT

MBMI
METAL BUILDINGS

4723 W ATLANTIC AVE.
SUITE A20
DELRAY BEACH, FL 33445
TEL.: 800-293-2097

GANESH PANDIT	
1319 MANGONIA LLC 1319 53RD STREET MANGONIA PARK, FL 33407	
DATE 7/23/24	DWG NO 4 OF 11
SIDEWALL ELEVATION	JOB NO 29187


DOWNSPOUT LOCATIONS

BOLT TABLE				
LINE F				
LOCATION		QUAN	TYPE	DIA
WF-1 - WF-2		8	A325	3/4"
WF-1 - RC1-1		8	A325	5/8"
		1	3/4"	


TRIM TABLE		
LINE F		
ID	MARK	DETAIL
1	BT-101	
2	CT-102	TRIM_203
3	GU-12	TRIM_2
4	MT-116	
5	FL-22	TRIM_179
6	HT-101	TRIM_178

MEMBER TABLE		
LINE F		
MARK	SIZE	
WF-1	W18841	
WF-2	W16841	
DJ-1	8M35C14	
DJ-2	C8X11.5	
DJ-3	C8X11.5	
DH-1	8M25C14	
G-4	8X25Z12	
G-5	8X25Z14	
G-6	8X25Z14	
G-7	8X25Z12	
G-8	8X25Z14	
G-9	8X25Z14	
G-10	8X35Z14	
G-11	8X35Z14	
G-12	8X25Z12	
G-13	8X25Z16	
G-14	8X35Z14	
G-15	8X25Z12	
G-16	8X25Z16	
G-17	8X25Z16	

CLIP TABLE	
LINE F	
ID	MARK
1	AK508
2	SC-5

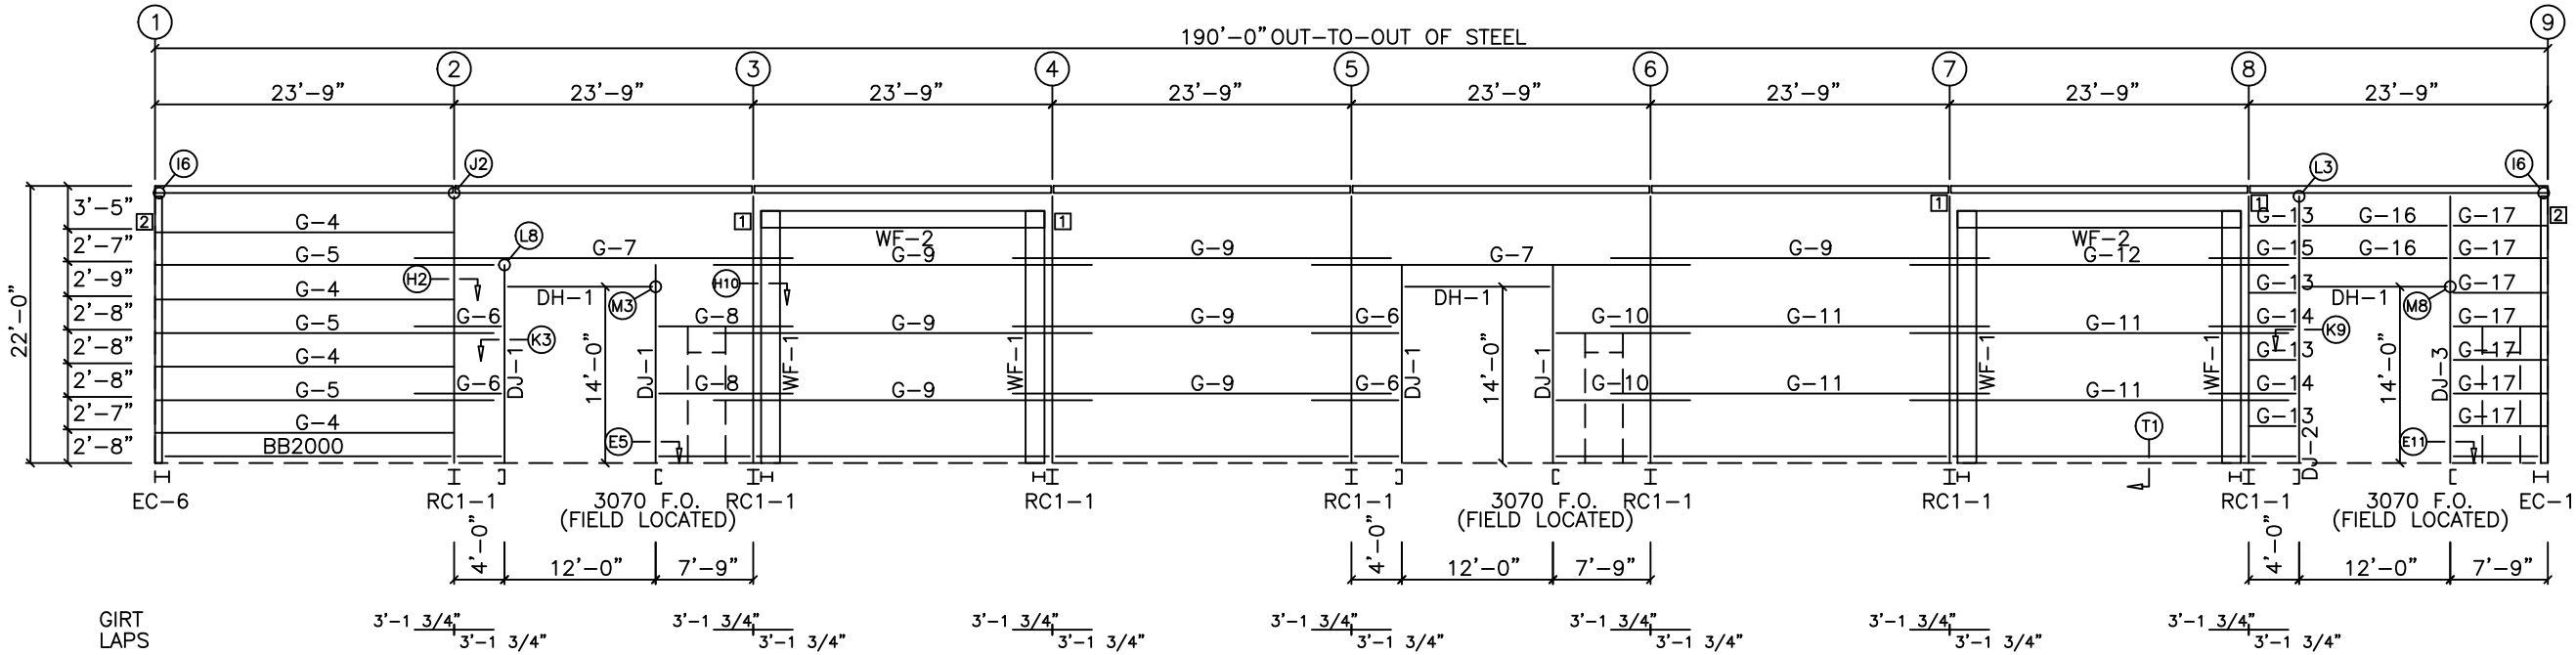

FRONT SIDEWALL FRAMING: LINE F

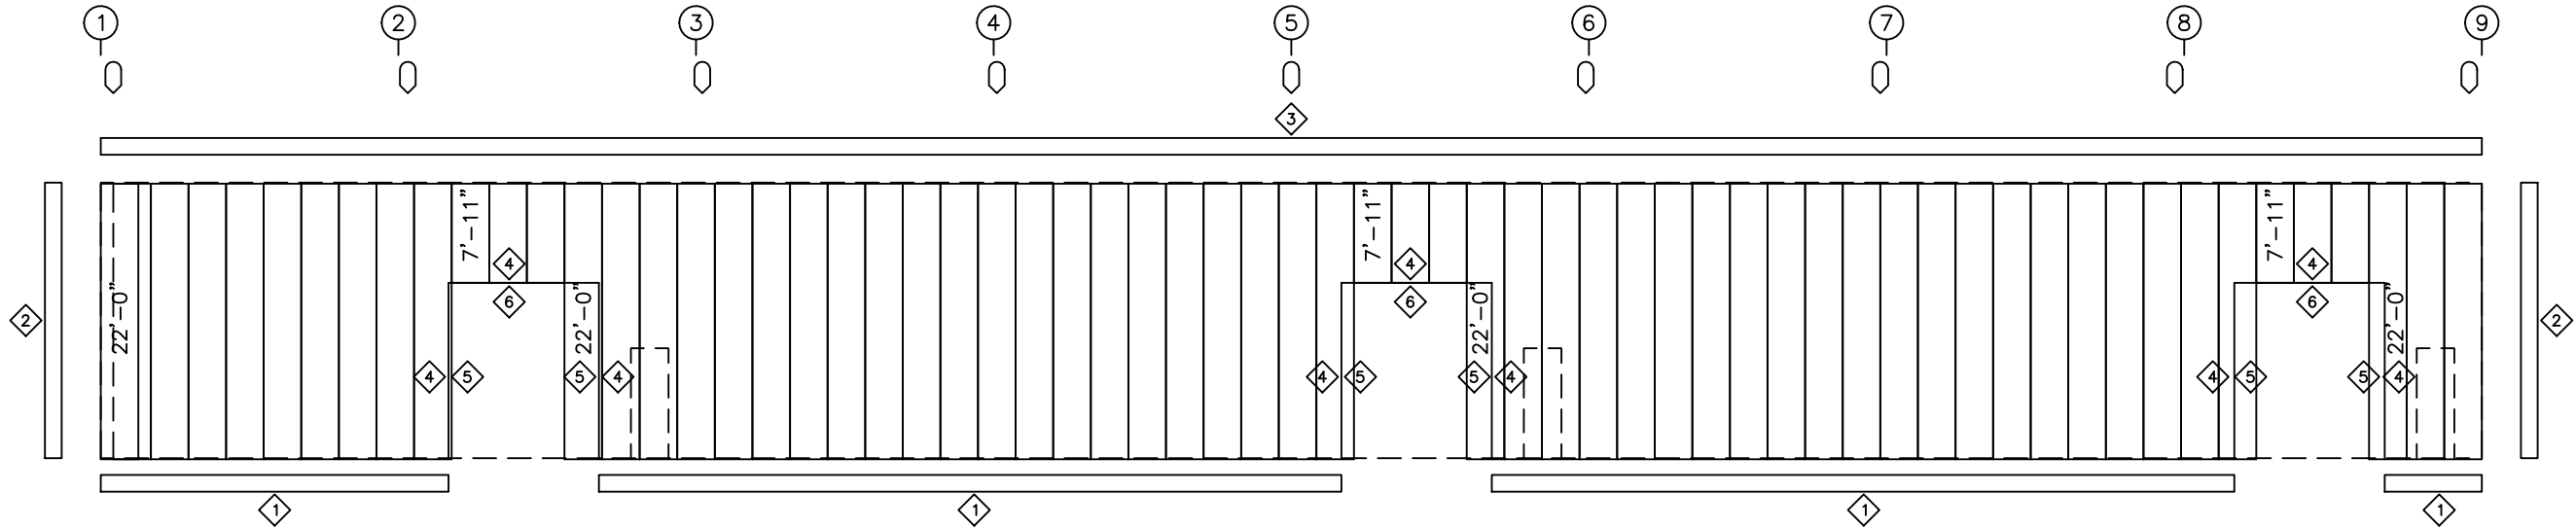

FRONT SIDEWALL SHEETING & TRIM: LINE F


DRAWING STATUS		REVISIONS			
		NO.	DATE	DESCRIPTION	DET/CHK
		A	6/ 4/24	FOR APPROVAL	CER/CER
		O	7/23/24	FOR PERMIT	KR CER

MBMI
METAL BUILDINGS


4723 W ATLANTIC AVE.
SUITE A20
DELRAY BEACH, FL 33445
TEL.: 800-293-2097

GANESH PANDIT	
1319 MANGONIA LLC 1319 53RD STREET MANGONIA PARK, FL 33407	
DATE 7/23/24	DWG NO 5 OF 11
SIDEWALL ELEVATION	JOB NO 29187

GENERAL NOTES:
1. FIELD SLOT FLUSH GIRTS FOR BRACING (IF REQUIRED).

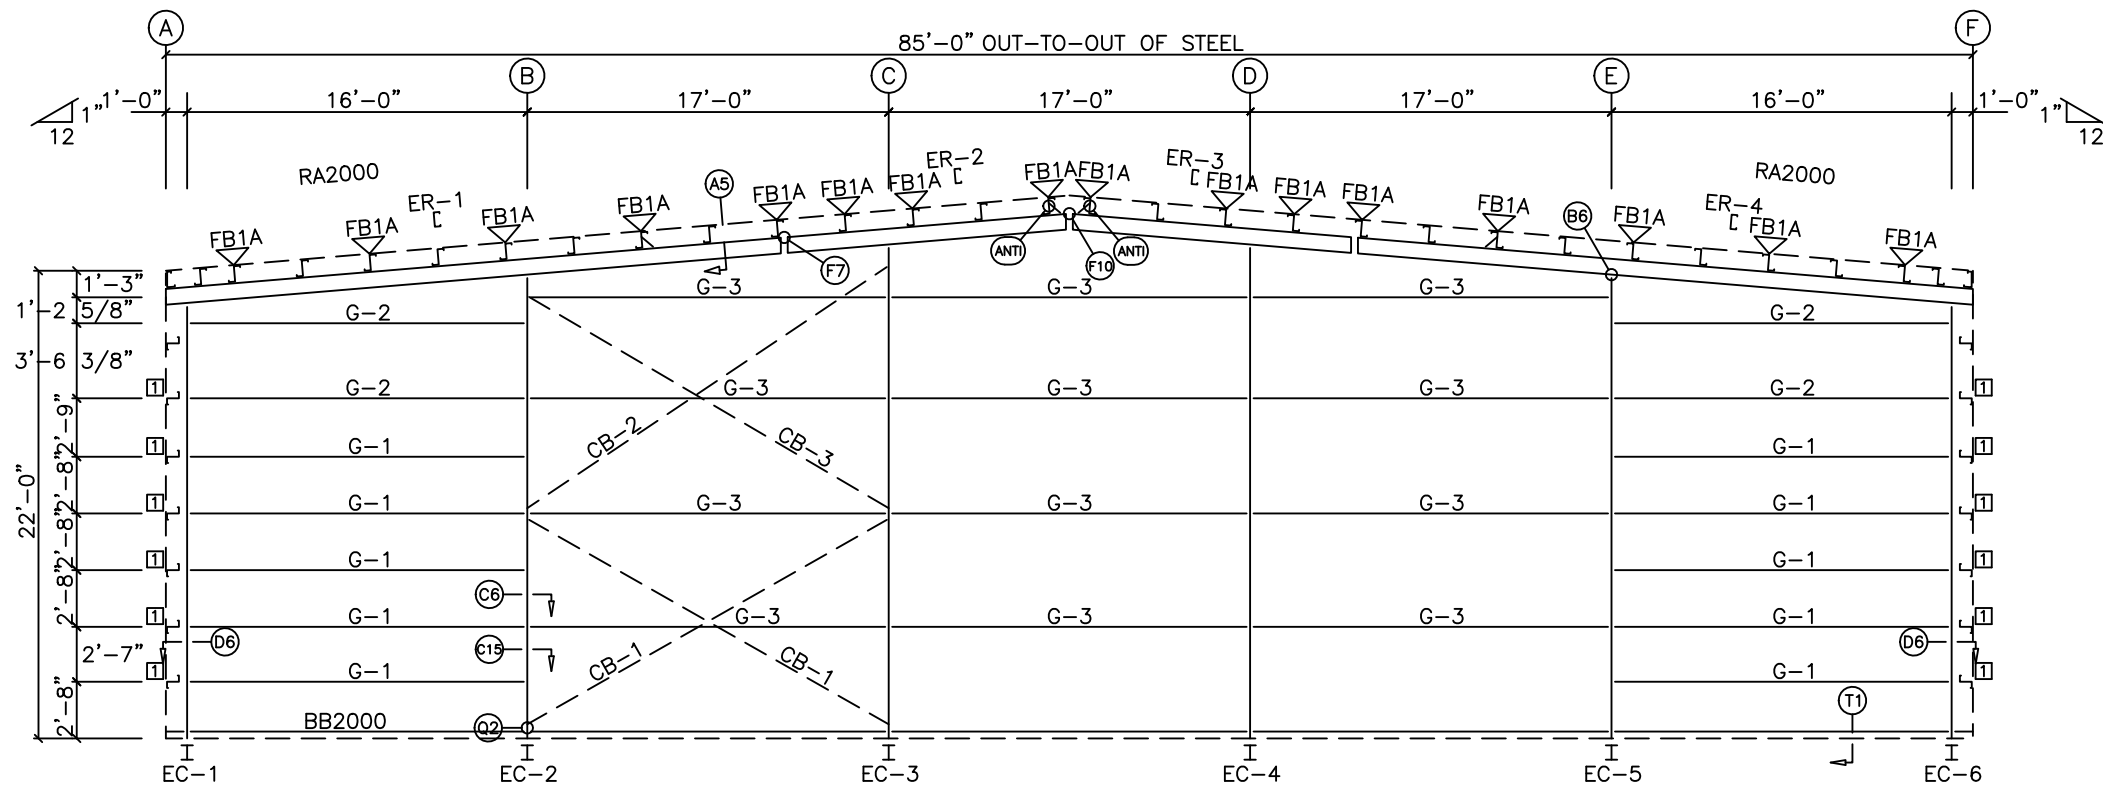

ENDWALL FRAMING: LINE 1

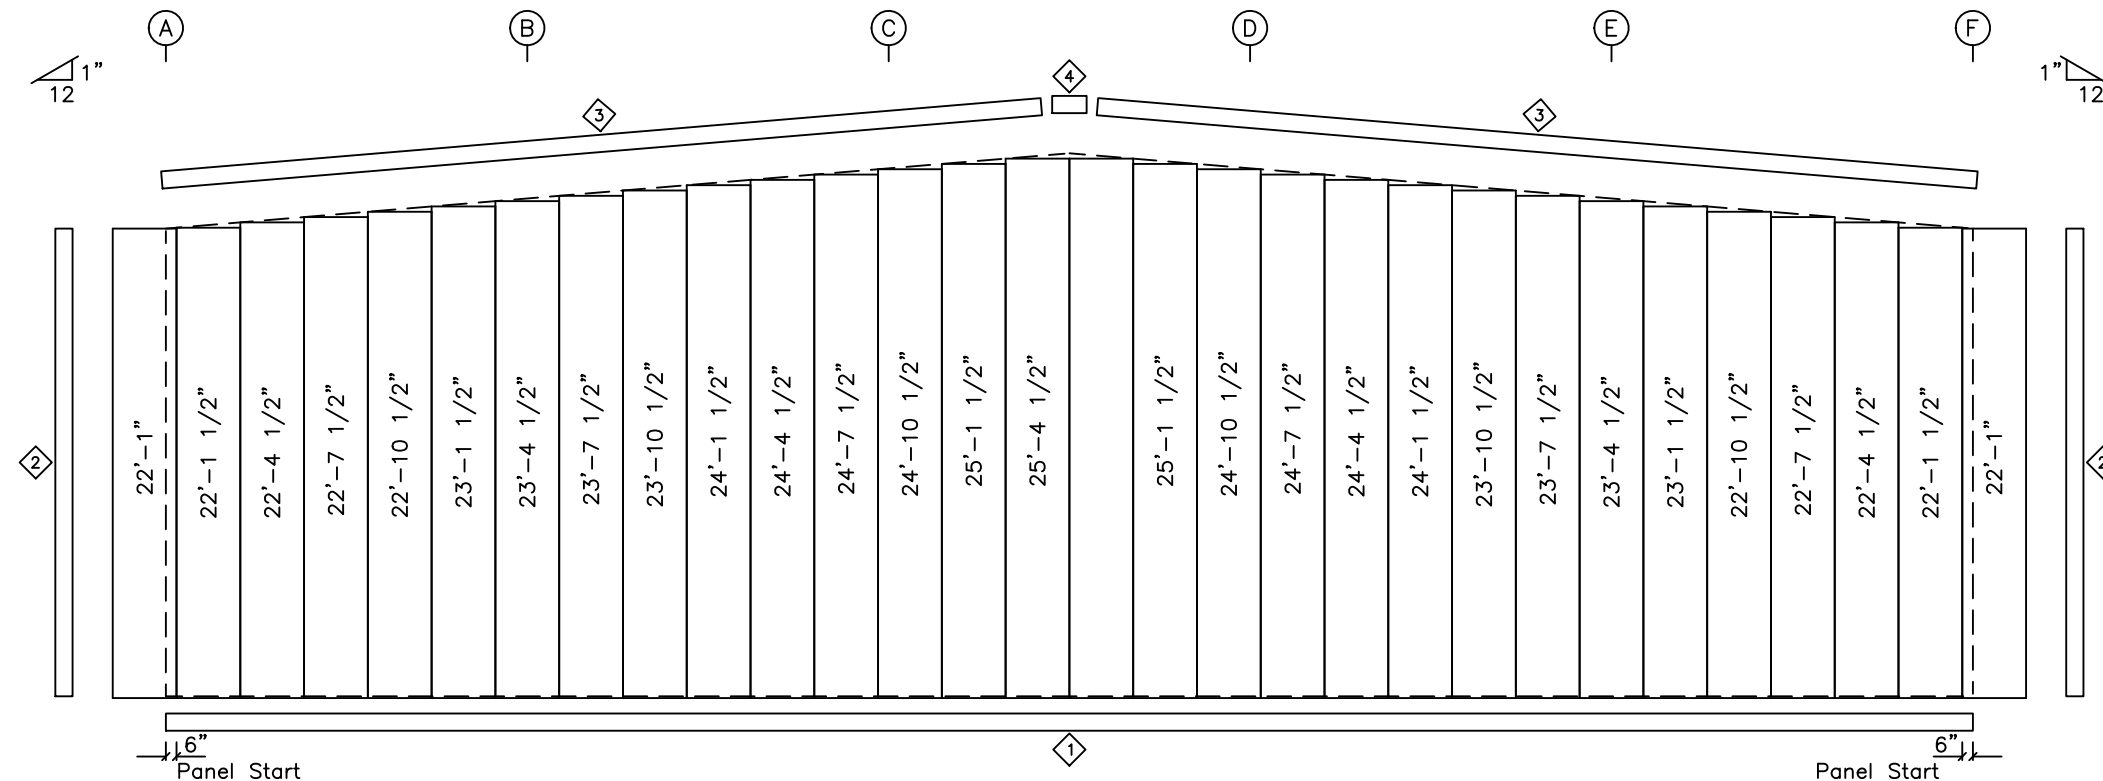

ENDWALL SHEETING & TRIM: LINE 1

BOLT TABLE				
LINE 1				
LOCATION	QUAN	TYPE	DIA	LENGTH
ER-1/ER-2	4	A325	5/8"	2"
ER-2/ER-3	4	A325	5/8"	2"
ER-3/ER-4	4	A325	5/8"	2"
Columns/Raf	4	A325	5/8"	1 1/2"

TRIM TABLE		
LINE 1		
ID	MARK	DETAIL
1	BT-101	TRIM_203
2	CT-102	TRIM_18
3	RT-101	
4	SPB	

FLANGE BRACE TABLE		
LINE 1		
ID	MARK	LENGTH
1	FB1A	2'-6 7/8"

CLIP TABLE		
LINE 1		
ID	MARK	
1	SC-5	

MEMBER TABLE		
LINE 1		
MARK	SIZE	
EC-1	W12541	
EC-2	W12641	
EC-3	W12651	
EC-4	W12651	
EC-5	W12641	
EC-6	W12541	
ER-1	12M35C12	
ER-2	12M35C12	
ER-3	12M35C12	
ER-4	12M35C12	
G-1	8X25Z16	
G-2	8X25Z14	
G-3	8X25Z12	
CB-1	0.31_CBL	
CB-2	0.31_CBL	
CB-3	0.31_CBL	

- GENERAL NOTES:
- USE BACK-UP PLATE (AK504) FOR BRACING (IF REQUIRED) AT COLD FORMED FRAMING MEMBERS
 - FIELD CUT ENDWALL PANELS AT ROOF PITCH FOR SLOPES GREATER THAN 1:12.
 - SEE SIDEWALL DRAWING FOR ADDITIONAL NOTES.

DRAWING STATUS		REVISIONS		
☐ FOR APPROVAL: THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL, AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT DOCUMENTS. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.		NO.	DATE	DESCRIPTION
☒ FOR PERMIT: THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL IN THAT, AS A MINIMUM, PIECE MARKINGS ARE NOT IDENTIFIED. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.		A	6/ 4/24	FOR APPROVAL
☐ FOR CONSTRUCTION: FINAL DRAWINGS.		O	7/23/24	FOR PERMIT

MBMI
METAL BUILDINGS


4723 W ATLANTIC AVE.
SUITE A20
DELRAY BEACH, FL 33445
TEL.: 800-293-2097

GANESH PANDIT			
1319 MANGONIA LLC 1319 53RD STREET MANGONIA PARK, FL 33407			
DATE 7/23/24		DWG NO 6 OF 11	
ENDWALL ELEVATION		JOB NO 29187	

SPLICE PLATE & BOLT TABLE										CAP PLATE BOLTS				
Mark	Qty Top	Bot	Int	Type	Dia	Length	Width	Thick	Length	Mark	Qty	Type	Dia	Length
SP-1	4	4	0	A325	0.750	2.00	6"	1/2"	2'-6"	RI1-4	4	A325	0.625	1.75
SP-2	4	4	0	A325	0.750	2.00	6"	1/2"	2'-5 3/4"					

▽ FLANGE BRACES: (1) One Side; (2) Two Sides
FBxxA(1)
A - FB2214

MEMBER TABLE														
Mark	Web Depth		Web Thick	Plate Length	Outside Flange					Inside Flange				
	Start	End			W	x	Thk	x	Length	W	x	Thk	x	Length
RC1-1	10.0	18.0	0.133	120.0	6	x	1/4"	x	229.7	6	x	1/4"	x	120.3
	18.0	24.0	0.133	135.7	6	x	1/4"	x	24.0	6	x	1/4"	x	110.3
					6	x	1/4"	x	32.6					
RR1-2	21.0	21.0	0.133	240.0	6	x	1/4"	x	240.0	6	x	1/4"	x	240.0
	21.0	21.0	0.133	180.3	6	x	1/4"	x	178.5	6	x	1/4"	x	180.3
RR1-3	21.0	25.8	0.133	116.9	6	x	1/4"	x	58.6	6	x	1/4"	x	113.3
					6	x	1/4"	x	58.6					
RI1-4	W12641													

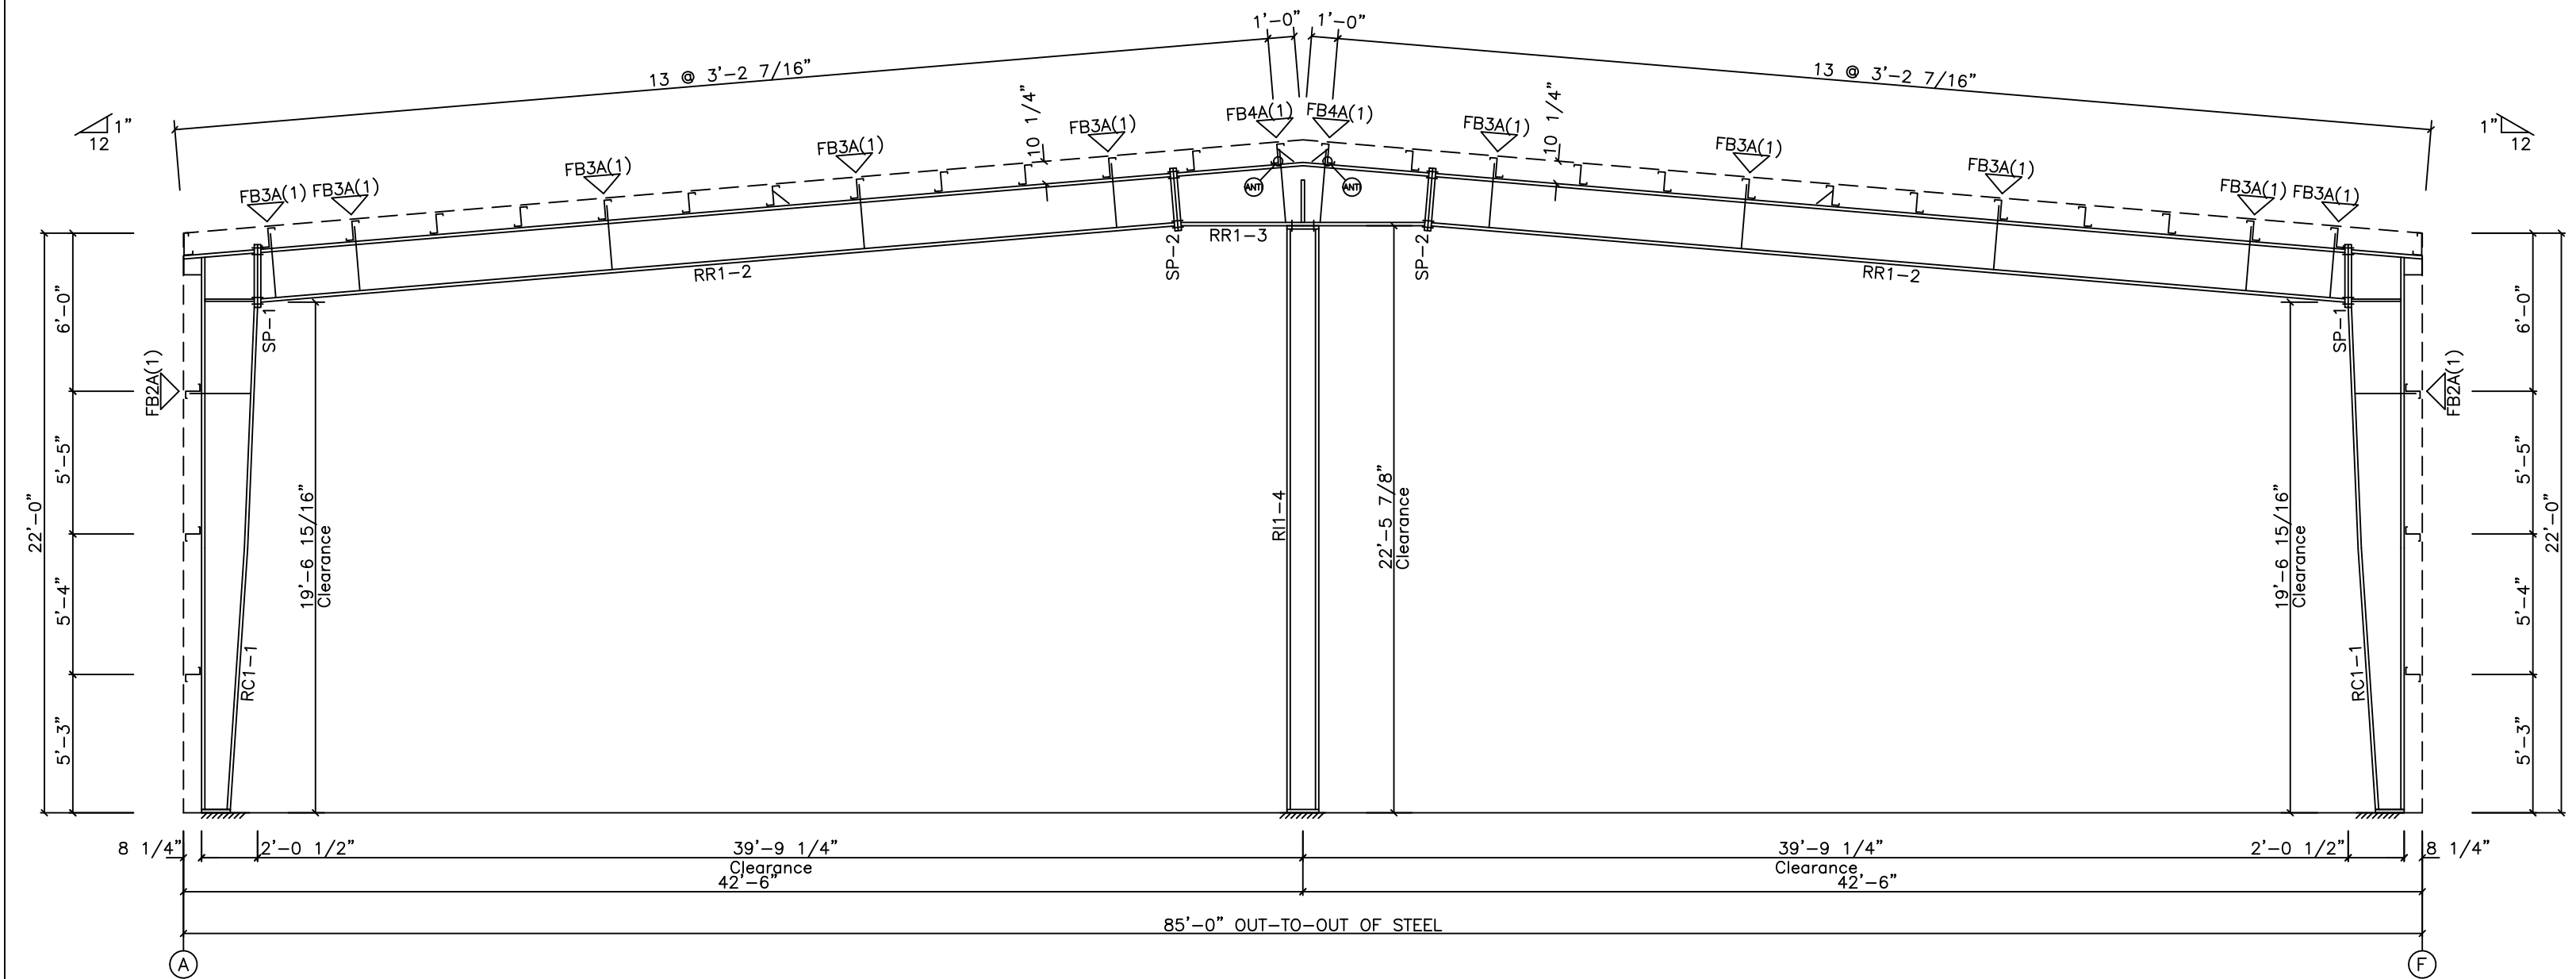

GENERAL NOTES:

CONSTRUCTION NOTES FOR THE RIGID FRAMES.


- ALL FIELD CONNECTIONS OF PRIMARY FRAMING MEMBERS SHALL BE BOLTED. WITH A325 H. S. BOLTS AND INSTALLED BY THE 'TURN OF THE NUT' METHOD.
- ALL FIELD CONNECTIONS OF SECONDARY FRAMING SHALL BE BOLTED WITH A307 MACHINE BOLTS.
- WELDING PROCESSES USED BY MANUFACTURER ARE IN ACCORDANCE WITH SEC. 1.3 OF AWS D 1.1.


DRAWING STATUS		REVISIONS	
☐ FOR APPROVAL:	NO. DATE	DESCRIPTION	DET/CHK
THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL, AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT DOCUMENTS. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.	A 6/ 4/24	FOR APPROVAL	CER/CER
☒ FOR PERMIT:	O 7/23/24	FOR PERMIT	KR CER
THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL IN THAT, AS A MINIMUM, PIECE MARKINGS ARE NOT IDENTIFIED. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.			
☐ FOR CONSTRUCTION:			
FINAL DRAWINGS.			


MBMI
METAL BUILDINGS
4723 W ATLANTIC AVE.
SUITE A20
DELRAY BEACH, FL 33445
TEL.: 800-293-2097

GANESH PANDIT
1319 MANGONIA LLC
1319 53RD STREET
MANGONIA PARK, FL 33407
DATE 7/23/24
RIGID FRAME ELEVATION

DWG NO 8 OF 11
JOB NO 29187

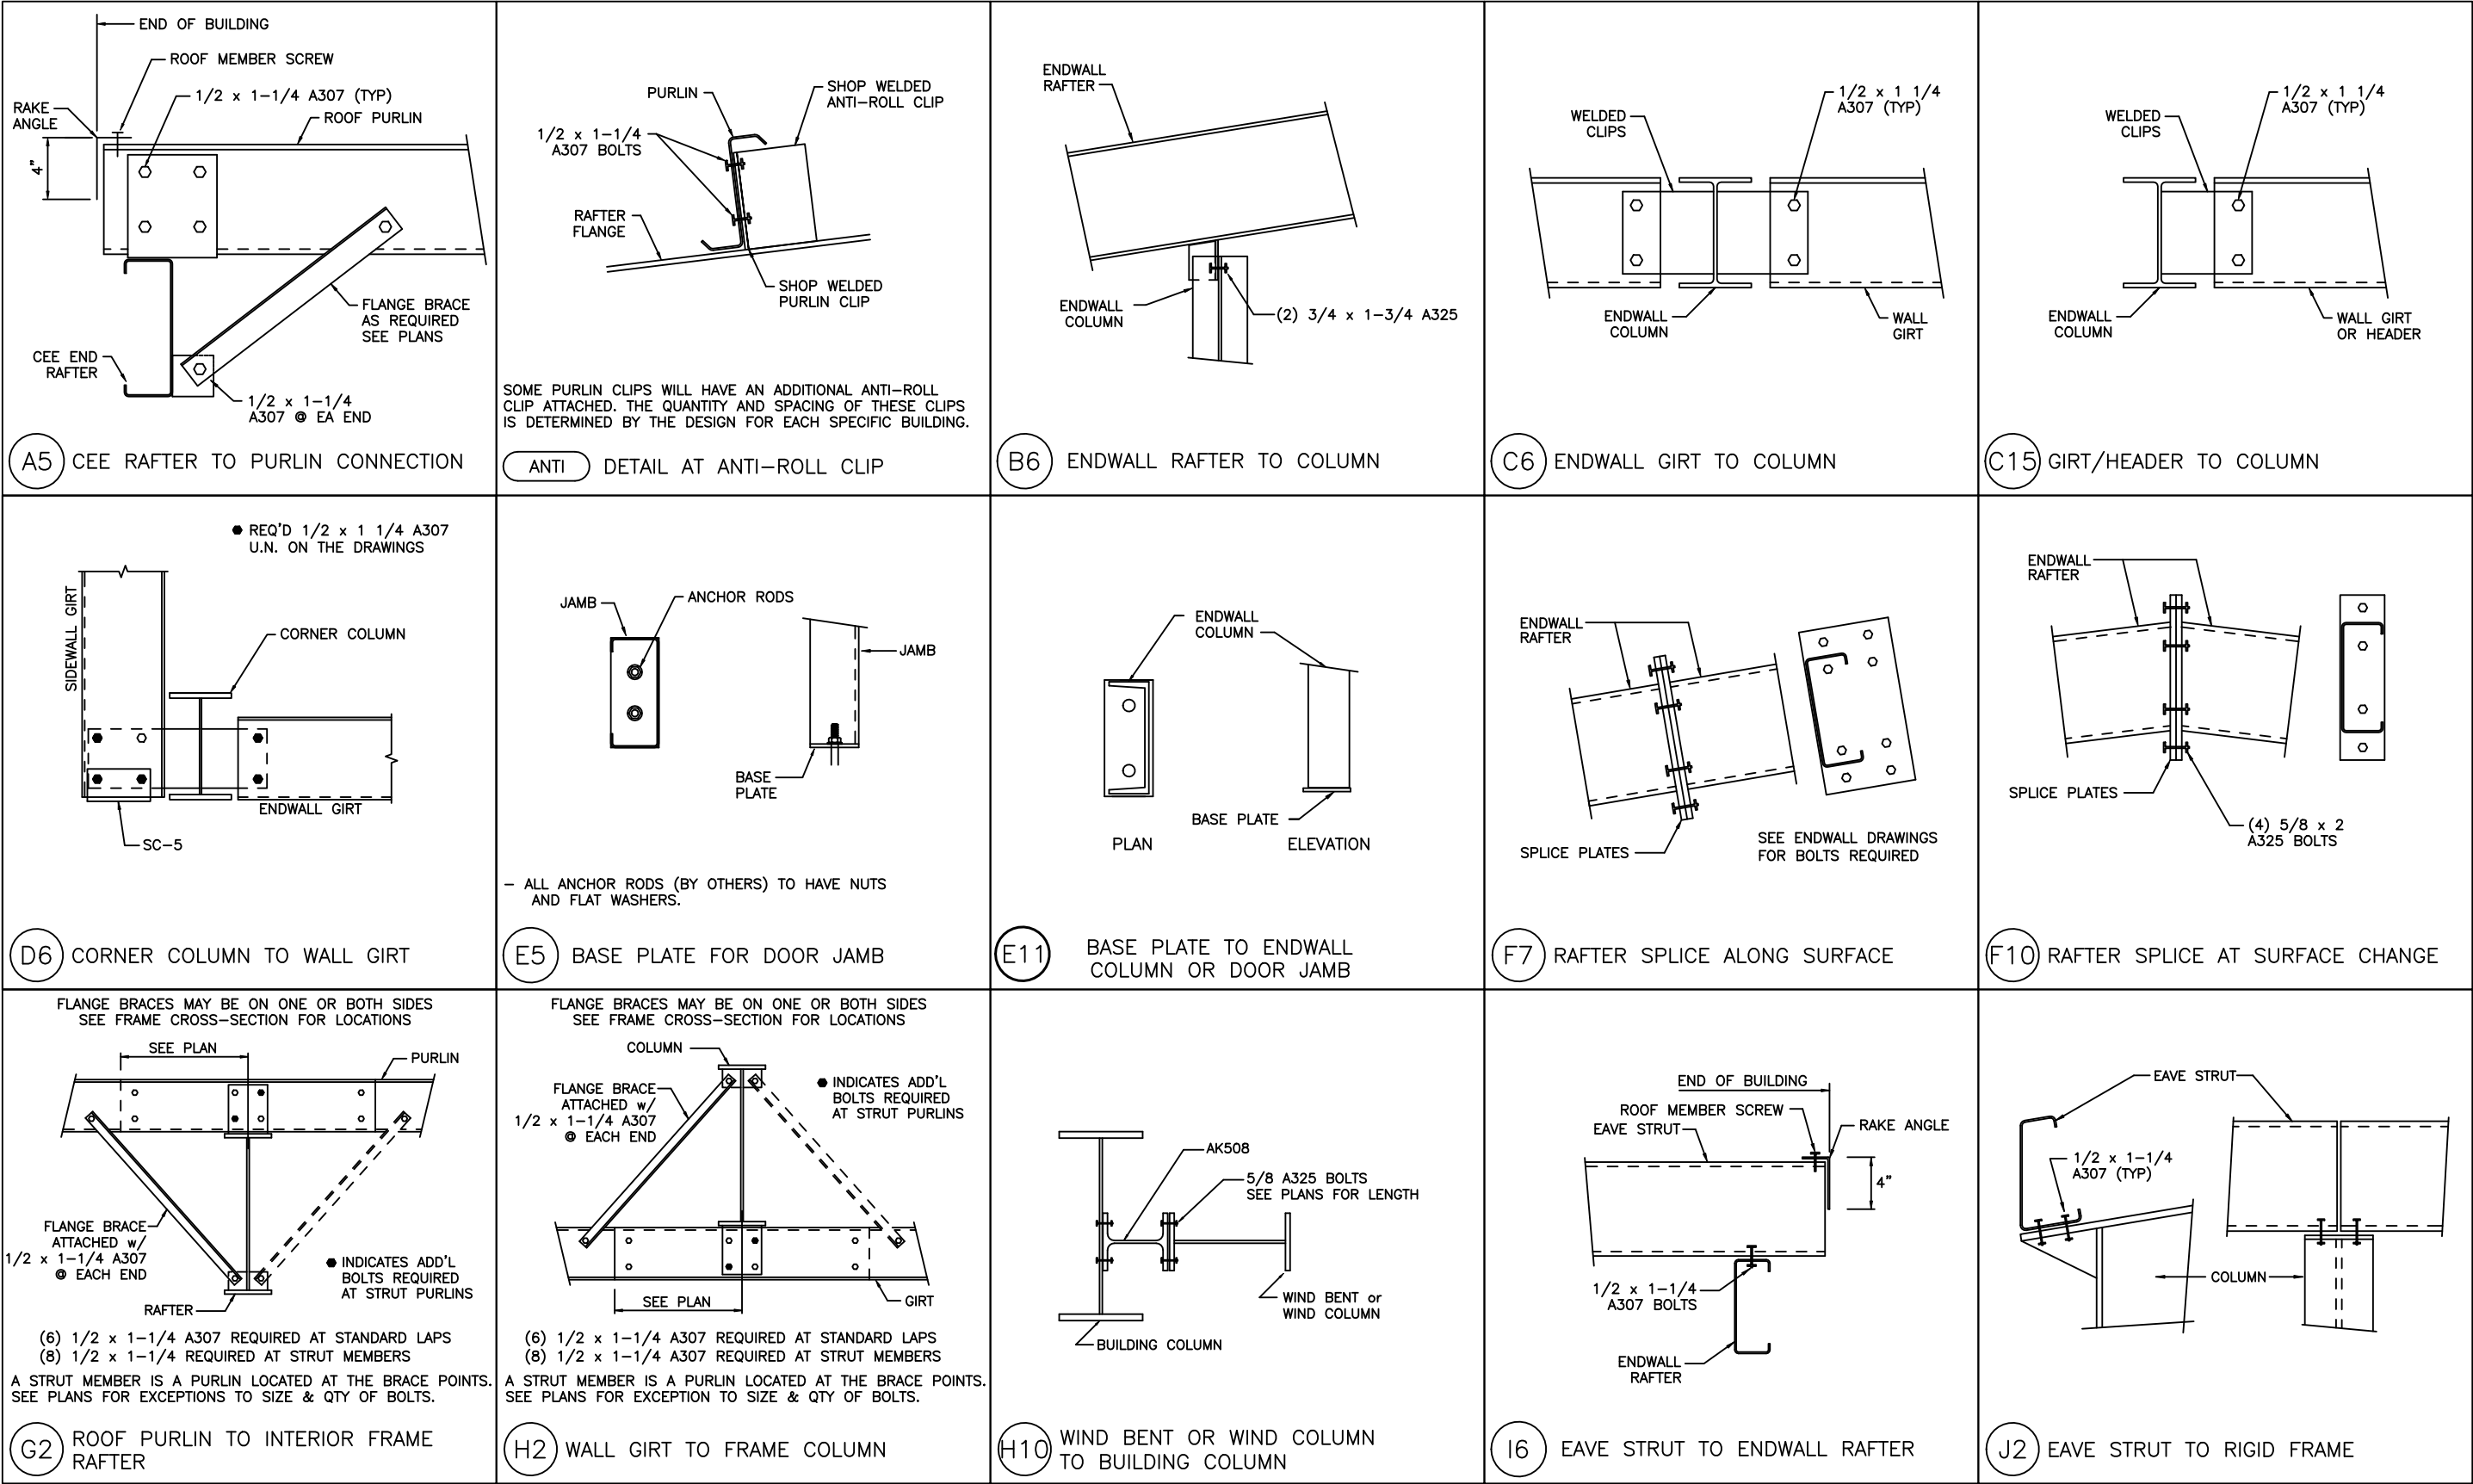

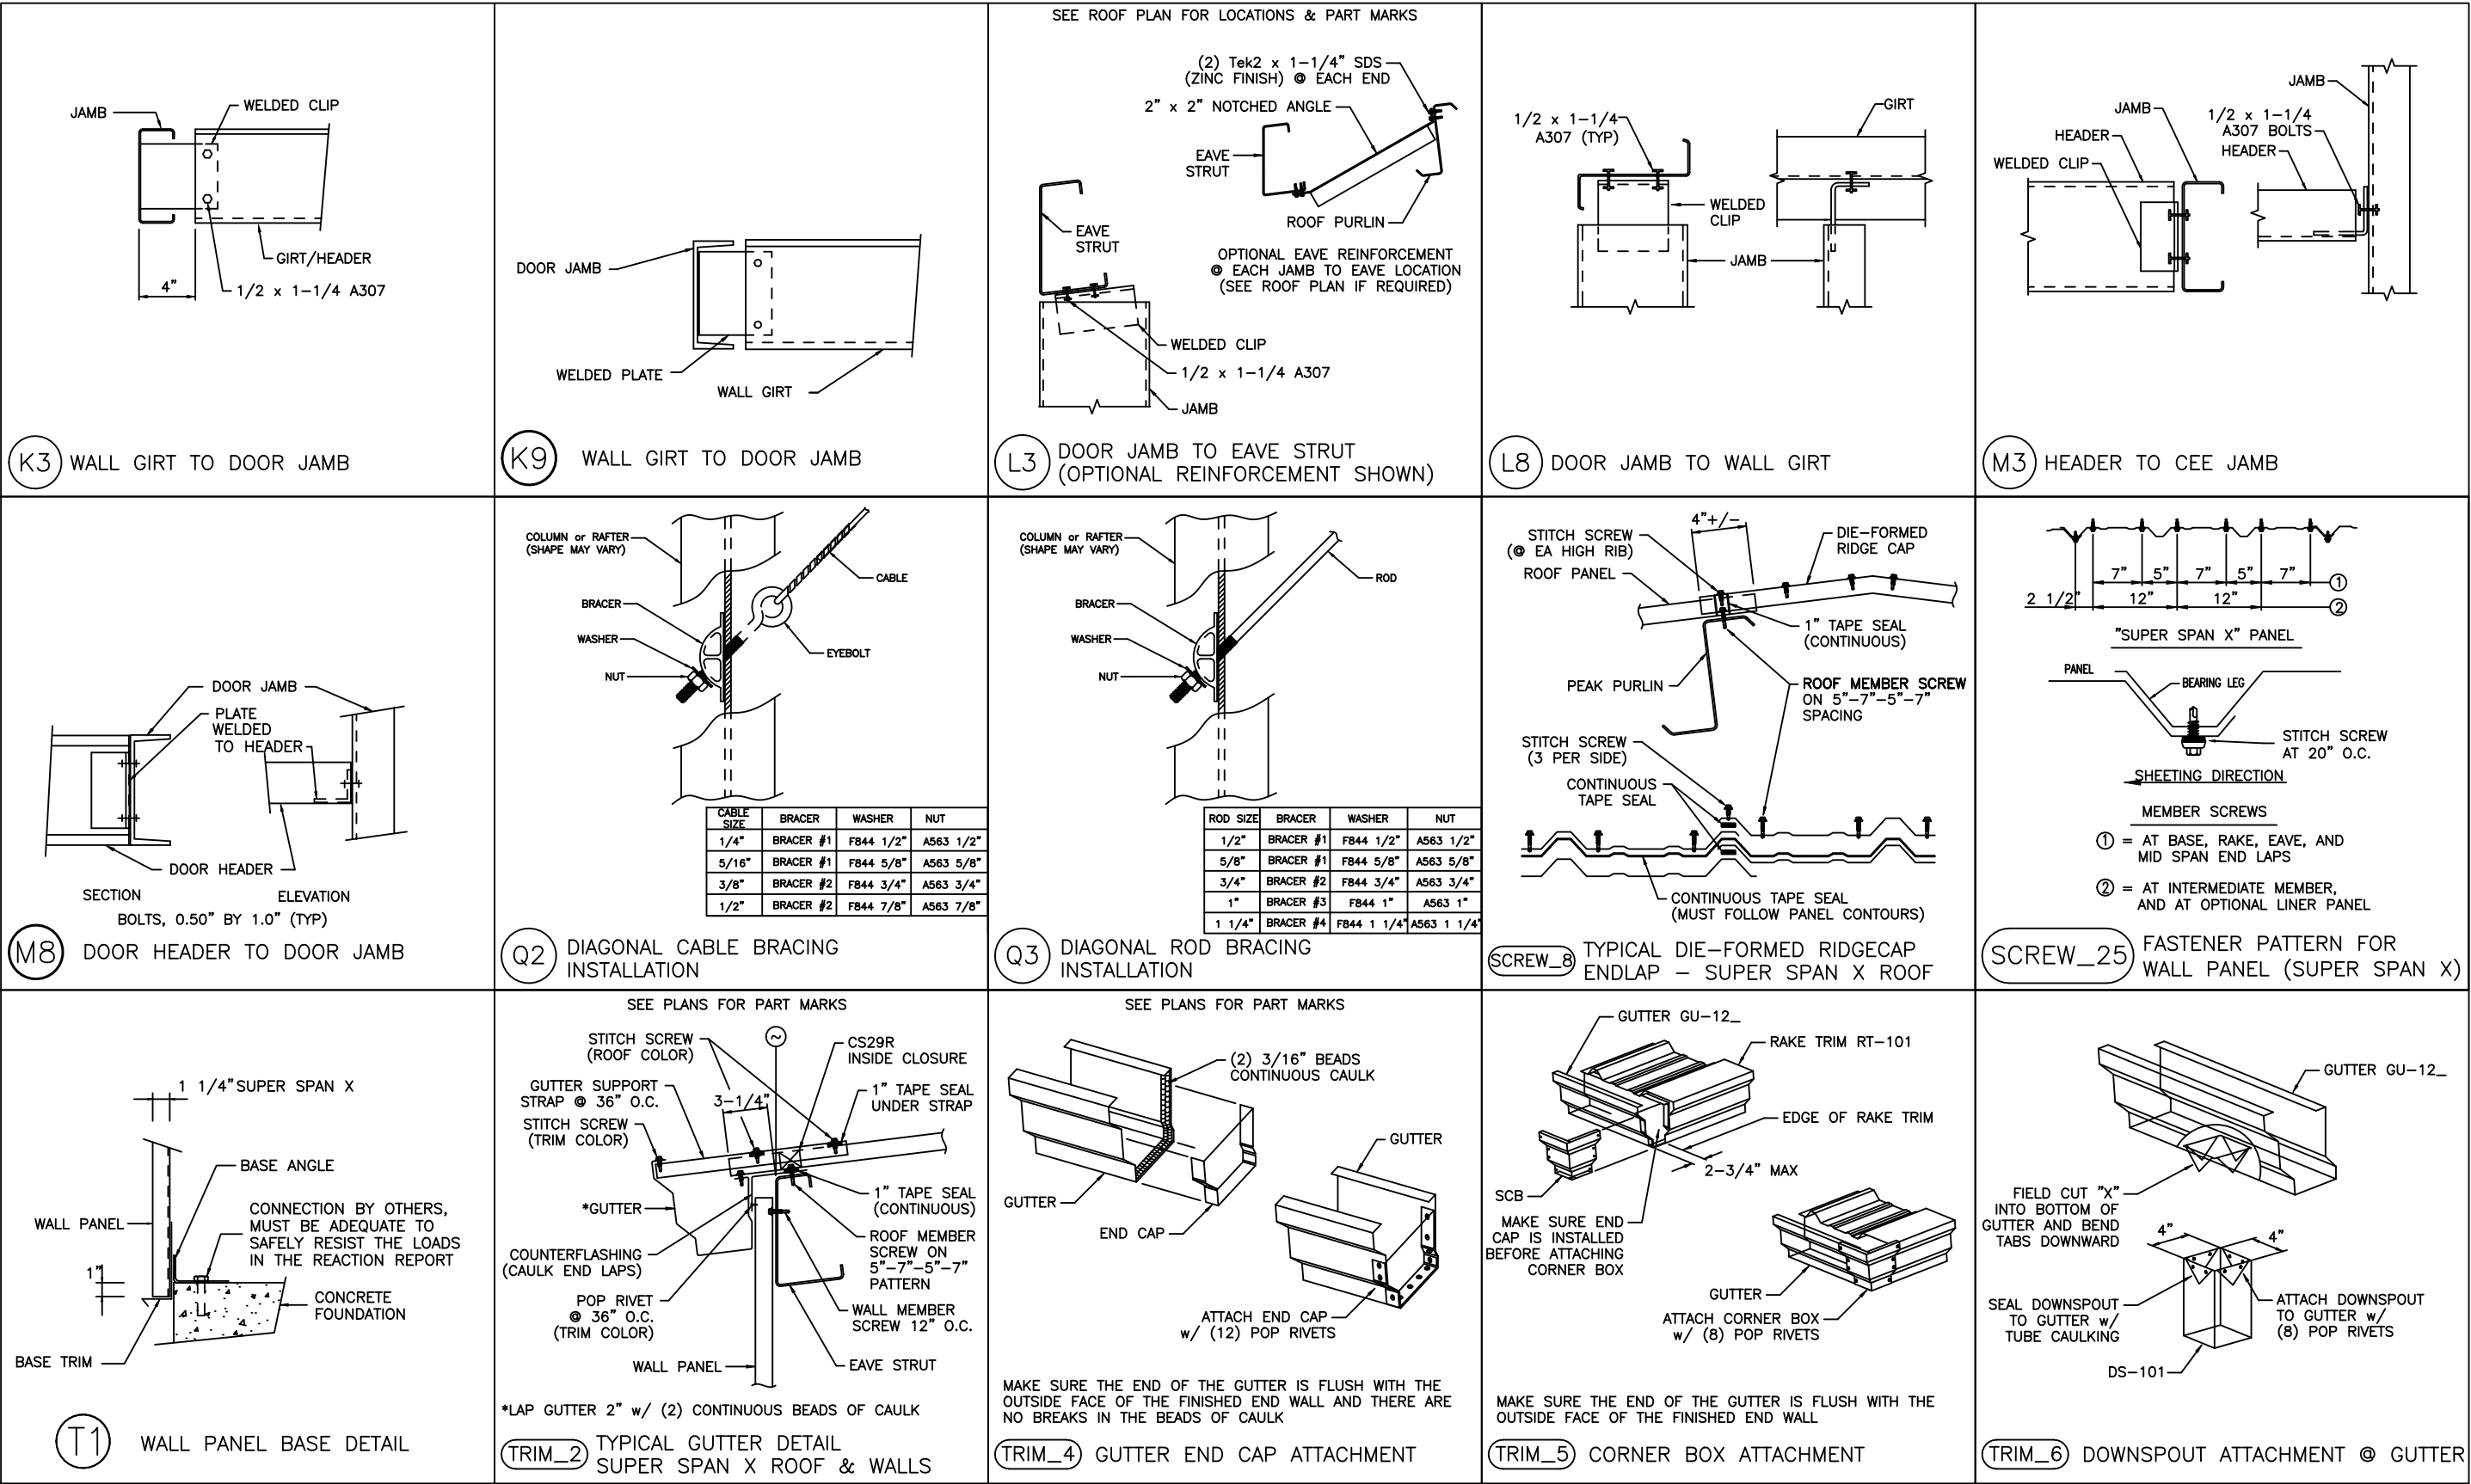

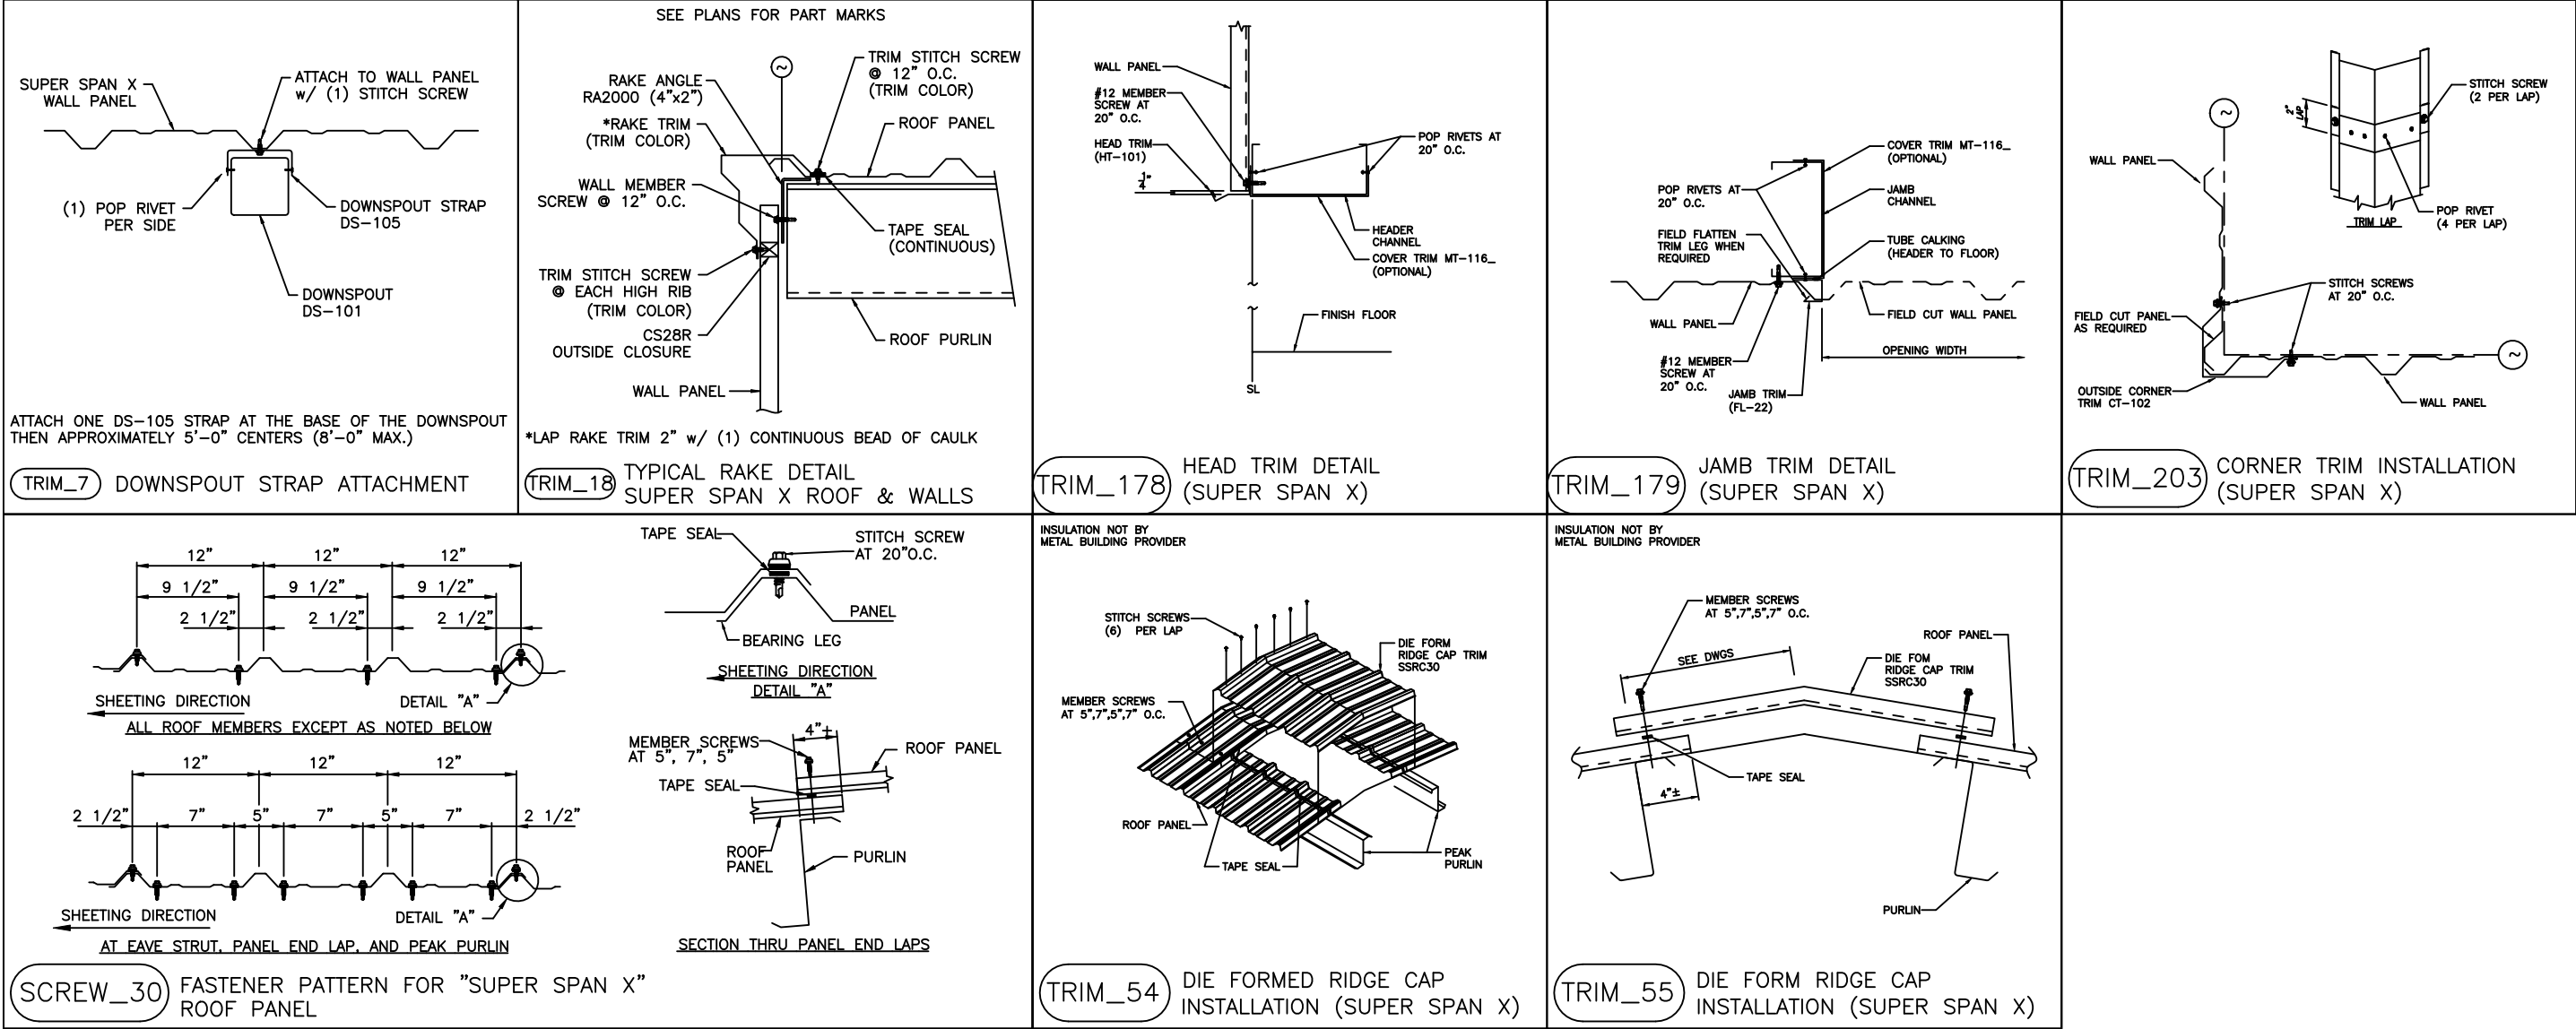

DRAWING STATUS		REVISIONS				MBMI METAL BUILDINGS 4723 W ATLANTIC AVE. SUITE A20 DELRAY BEACH, FL 33445 TEL.: 800-293-2097	GANESH PANDIT		
☐	FOR APPROVAL: THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT DOCUMENTS. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.	NO.	DATE	DESCRIPTION	DET		CHK	1319 MANGONIA LLC 1319 53RD STREET MANGONIA PARK, FL 33407	
		A	6/ 4/24	FOR APPROVAL	CER		CER	DATE 7/23/24	
		O	7/23/24	FOR PERMIT	KR		CER	DWG NO 11 OF 11	
☒	FOR PERMIT: THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL IN THAT, AS A MINIMUM, PIECE MARKINGS ARE NOT IDENTIFIED. ONLY DRAWINGS ISSUED "FOR CONSTRUCTION" CAN BE CONSIDERED AS COMPLETE.							DETAIL DRAWINGS	
								JOB NO 29187	
☐	FOR CONSTRUCTION: FINAL DRAWINGS.								